



CLEVELAND



WALTER

HOLEMAKING Catalog

Holemaking



Threading



Milling



**GREENFIELD
INDUSTRIES**



MADE
IN THE
U.S.A.

DOWNLOAD



◆ CLEVELAND | ◆ WALTER

HOLEMAKING
THREADING and
MILLING catalog



					Tool Material		Application				Point				Surface Treatment										
					HSS	Cobalt	Carbide	TCT	Steel	Stainless	Cast Iron	Non-Ferrous	High-Temp Alloy	Hardened Steel	118°	118° Split	118° 4-facet	118° K-Notch	135° Split	Bright	Black Oxide	Straw	TIN	TiCN	TiAlN
Style	Page	Product	Type	Set																					
SCREW MACHINE / STUB LENGTH DRILLS																									
2120	D-20		General Purpose	yes	•				•	•	•	•			•				•						
2175	D-22		Wide Land Parabolic			•			•	•	•	•							•			•	•	•	•
2330	D-25		NAS907-C Heavy Duty	yes	•				•	•	•	•							•	•					
2133	D-28		Heavy Duty			•			•	•	•	•							•			•			
1765	D-32		Carbide Spade Drill				•		•	•	•			•	•					•					
1767	D-33		Carbide Stub Length				•		•	•	•			•			•		•						
JOBBER DRILLS																									
2001, 2002	D-34		General Purpose	yes	•				•	•	•	•			•					•	•				•
2020	D-41		Low Helix		•				•	•	•	•			•					•					
2012	D-42		High Helix		•				•	•	•	•			•					•					
2065	D-44		Parabolic		•				•	•	•	•						•		•		•			
2075	D-47		Wide Land Parabolic	yes		•			•	•	•	•							•			•	•	•	•
2006	D-49		Left Hand		•				•	•	•	•			•					•					
2228	D-50		NAS907-A General Purpose		•				•	•	•	•				•				•					
2222	D-52		NAS907-B Heavy Duty	yes	•				•	•	•	•							•	•					
2213	D-55		NAS907-J Heavy Duty	yes		•			•	•	•	•							•		•				
2011	D-60		Cotter Pin Heavy Duty		•				•	•	•	•							•	•					
3780	D-61		Q-AMD Short Flute	yes		•			•	•	•	•							•	•					
2727	D-64		Carbide Tipped				•		•	•	•	•			•					•					
1766	D-65		Straight Flute				•		•	•	•	•			•	140° 4-facet				•					
1727	D-67		Carbide Heavy Duty				•		•	•	•	•					•		•						

*Tool Material is Premium HSS


Be sure to see our [Cleveland Tech Tips YouTube Channel](#) for helpful information



					Tool Material				Application				Point				Surface Treatment								
					HSS	Cobalt	Carbide	TCT	Steel	Stainless	Cast Iron	Non-Ferrous	High-Temp Alloy	Hardened Steel	118°	118° Split	118° 4-facet	118° K-Notch	135° Split	Bright	Black Oxide	Straw	TiN	TiCN	TiAlN
Style	Page	Product	Type	Set																					
TAPER LENGTH DRILLS																									
2745	D-70		Carbide Tipped Heavy Duty, Tanged																						
2510	D-71		General Purpose	yes																					
2513	D-74		Heavy Duty																						
2565	D-76		Parabolic																						
2575	D-78		Wide Land Parabolic																						
AIRCRAFT EXTENSION DRILLS																									
3957	D-79		NAS907-B 6" and 12"																						
3722	D-81		NAS907-J 6" and 12"																						
EXTRA LENGTH DRILLS																									
950E	D-83		Extra Length																						
TAPER SHANK DRILLS																									
2410	D-85		Standard																						
2411	D-85		Undersized																						
2412	D-85		Oversized																						

**TECH TIP****SPLIT POINT VERSUS TRADITIONAL POINT**

The right drill bit can help you work smarter & faster, and even save you money — if you know which features to look for.



If you're drilling by hand, choose a drill with a split point: it drills on contact. You'll get

a faster start and there's no walking. And you're less likely to need a center punch to get started, thanks to the split point's four cutting edges. Those extra edges cause the split point to drill rounder holes faster, while generating less heat with less

force. That means you're working faster and getting more holes per charge with your cordless drill. The split point tool is versatile: it also performs well in presses, CNC machines, and more.




The heavy duty construction of split point drill bits make them a great choice when you work with hard materials like cast iron, stainless steel and alloy steels. Split point bits are available from Greenfield Industries in cobalt and High Speed steel.

You can expect a longer life from Greenfield Industries' heavy duty split point drill, with fewer broken bits.

Watch our video
for more helpful
information








					Tool Material		Application						Point		Surface Treatment								
					HSS	Cobalt	Carbide	Steel	Stainless	Cast Iron	Non-Ferrous	High-Temp Alloy	Hardened Steel	118°	Various degrees - see product page	Bright	Black Oxide	Straw	TiN	TiCN	TiAlN	AlTiN	
Style	Page	Product	Type	Set																			
MISCELLANEOUS DRILLS																							
1798	D-87		Combined Drill Countersink				•	•	•	•	•				60°	•							
996	D-88		Bell Type Drill & Countersink		•			•		•	•			•	60°, 120°	•							
998	D-88		Plain Drill & Countersink	yes	•			•		•	•			•	60°	•							
3001	D-89		Countersink & Deburring	yes		•		•	•	•	•				60°, 82°, 90°, 100°	•							
995	D-90		Spotting & Centering - Short		•			•		•	•			•		•							
1799	D-90		Spotting & Centering				•	•	•	•	•				90°, 120°, 142°							•	
2636	D-90		NC Spotting & Centering - Short	yes		•		•	•	•	•				90°, 120°			•					
2646	D-90		Spotting & Centering - Long	yes		•		•	•	•	•				90°, 120°			•					
2635	D-92		NC Spotting Drill - Short	yes	•			•	•	•	•				90°, 120°	•							
2645	D-92		NC Spotting Drill - Long	yes	•			•	•	•	•				90°, 120°	•							
110C1	D-93		Single Flute Countersink				•	•		•					60°, 82°, 90°, 100°, 120°	•							
110C3	D-93		3 Flute Countersink				•	•		•					60°, 82°, 90°, 100°, 120°	•							
110C6	D-93		6 Flute Countersink				•	•		•					60°, 82°, 90°, 100°, 120°	•							
10001	D-94		Single Flute Countersink	yes	•			•		•					60°, 82°, 90°, 100°, 120°	•							
10003	D-94		3 Flute Countersink	yes	•			•		•					60°, 82°, 90°, 100°, 120°	•							
610	D-95		4 Flute Countersink	yes	•			•		•					60°, 82°, 90°, 100°	•							
105	D-95		Drift Drill		•			•		•						•							

Check out a
quick look at
our facility





Style	Page	Product	Type	Set	Tool Material		Application					Hole		Surface Treatment				
					HSS	Cobalt	Carbide	Steel	Stainless	Cast Iron	Non-Ferrous	High-Temp Alloy	Hardened Steel	Blind Hole	Thru Hole	Bright	Black Oxide	Staw
REAMERS																		
1730	D-96		Straight Shank, Straight Flute				•	•	•	•	•			•	•			
4001	D-97		Straight Shank, Straight Flute	yes	•			•	•	•	•			•	•			
4030	D-101		Straight Shank, Spiral Flute		•			•	•	•	•		•		•			
4005	D-102		Taper Shank, Straight Flute		•			•	•	•	•			•	•			
4703	D-103		Straight Shank, Straight Flute		•			•	•	•	•			•	•			
616	D-104		Taper Shank, Bridge Reamer		•			•	•	•	•					•		
618	D-104		Taper Shank, Car Reamer		•			•	•	•	•					•		
642	D-105		Taper Pipe Reamer		•			•	•	•	•				•			
650	D-105		High Spiral Spirex Taper Pin		•			•	•	•	•				•			
657	D-106		Taper Pin Straight Shank, Straight Flute		•			•	•	•	•				•			
659	D-106		Taper Pin Straight Shank, Helical Flute		•			•	•	•	•				•			
COUNTERBORES																		
879	D-107		Straight Shank C'bore & Spot Facer		•			•	•	•	•				•			
884	D-108		Short Aircraft Type		•			•	•	•	•				•			
879P	D-109		Interchangeable Pilot for Style 879 & 884		•			•	•	•	•				•			
655	D-110		Clearance or Taper Router		•			•	•	•	•				•			
183	D-111		3 Flute Continuous Pilot	yes	•			•	•	•	•				•			

					Tool Material				Application					
					HSS	Cobalt	Carbide	TCT	Steel	Stainless	Cast Iron	Non-Ferrous	High-Temp Alloy	Hardened Steel
Style	Page	Product		Type	Set									
OTHER TOOLS														
192	D-138	Screw Extractor		Ezy-Out®	yes	•				•		•	•	
850	D-139	Tool Bits		Square		•				•		•	•	
855				Square			•			•	•	•		
860				Square				•			•	•	•	
851			D-140		Rectangular		•				•		•	•
856	Rectangular						•			•	•	•		
861	Rectangular						•			•	•	•		
902	D-141	Blanks		Oversize		•				•		•	•	
903				Undersize					•			•	•	•
CASE	D-142	Metal Cases		Empty										



Product Index



SCAN for information on all



CLEVELAND | **WALTER**

**CATALOGS OR
GO TO: gfii.com/literature/cleveland**

Index

Style	Page	Product	Type	Set																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																								
-------	------	---------	------	-----	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--



SCAN for information on all



CLEVELAND | WALTER

 CATALOGS OR
GO TO: gfii.com/literature/cleveland

Style	Page	Product	Type	Set																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	</
-------	------	---------	------	-----	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	----

				Tool Material		Thread							Application				Coolant		Surface Treatment										
				HSS	Cobalt	Carbide	UNC	UNF	NPT	NPTF	Metric Coarse	Metric Fine	BSPP	BSPT	DIN	Steel	Stainless	Cast Iron	Non-Ferrous	Special Alloy	Hardened Steel	Non	Thru	TiAIN	AlCrN	Hardlube			
Style	Page	Product	Type																										
THREAD MILLS																													
CMTM2, CMTMM2	Scan QR code above or request our THREADING catalog		Mini			•	•	•				•	•				•	•	•	•	•	•	•				•		
CMTM3, CMTMM3			Mini			•	•	•				•	•					•	•	•	•	•	•	•	•			•	
CTM, CTMC			General Purpose - Inch			•		•	•								•	•	•		•	•	•	•	•	•	•		
CTMM, CTMMC			General Purpose - Metric			•										•	•	•	•		•	•	•	•	•	•	•		
CTMNP, CTMNPC			National Pipe Tapered			•				•	•						•	•	•		•	•	•	•	•	•	•		
CTMBPP, CTMBPPC			British Pipe Tapered			•								•			•	•	•		•	•	•	•	•	•	•		
CTMBPT, CTMBPTC			British Pipe Parallel			•									•		•	•	•		•	•	•	•	•	•	•		



Product Index

SCAN for information on all



CLEVELAND | WALTER

CATALOGS OR
GO TO: gfii.com/literature/cleveland

CLEVELAND | **WALTER**
CATALOGS OR
GO TO: gfii.com/literature/cleveland

Tool Material		Surface Treatment									
HSS	Carbon Steel	Steel	Bright	Black Oxide	TiN	TiCN	TiAlN	AlCrN	Oxide over Nitride	Hardlube	

Style	Page	Product	Type	Set
-------	------	---------	------	-----

DIES

0650, 0650M, 492	Scan QR code above or request our THREADING catalog		Hexagon Rethreading	yes	•	•		•							
0660			Taper Pipe		•	•		•							
0610, 0710			Round Adjustable		•	•		•							
0710M			Round Adjustable		•			•							
0620			Round Adjustable - Pipe			•		•							
222			Die Stock, Adjustable												
0550			Die Set: Die Halves				•	•							
0551			Die Set: Cap				•	•							
0552			Die Set: Guide				•	•							
0553			Die Set: Collet (cap and guide)				•	•							
0554			Die Set Assembly (0550, 0553, 0551, 0552)				•	•							
223			Quick Set Die Stock			•		•							
225			Quick Set Jr. Die Stock			•		•							
226			Quick Set Spanner Wrench												

Style	Page	Product	Type	Style	Page	Product	Type
WRENCHES							
240	Scan THREADING QR code		Straight Wrench	244	Scan THREADING QR code		Combo Ratchet & Slip Handle Wrench
242			Plain T-Handle Wrench	245			Long Shank T-Handle Wrench
243			Slip T-Handle Wrench				



SCAN for information on all



CLEVELAND | WALTER

CATALOGS OR

GO TO: gfii.com/literature/cleveland

SCAN for information on all																											
CLEVELAND WALTER																											
CATALOGS OR GO TO: gfii.com/literature/cleveland																											
Style	Page	Product	Type	No. of Flutes	Square	Ball	Chamfer	Radius/Rounding	Steel	Stainless	Cast Iron	Non-Ferrous	High-Temp Alloy	Hardened Steel	Slot	Profile	Plunging	Ramping	Drilling	Chamfer	Slot w/ Radius	Bright	TiN	TiCN	TiAlN		
HIGH SPEED STEEL																											
HMD-2	Scan QR code above or request our MILLING catalog		Miniature	2	•				•	•	•	•	•		•	•	•	•				•	•	•	•		
HD-2			Finisher	2	•				•	•	•	•	•		•	•	•	•				•	•	•	•		
HD-2B			Finisher	2		•			•	•	•	•	•		•	•	•	•			•	•	•	•	•		
HD-3			Finisher	3	•				•	•	•	•	•		•	•	•	•	•			•	•	•	•		
HD-4C			Finisher	4	•				•	•	•	•	•			•	•	•				•	•	•	•		
HG-2			Finisher	2	•				•	•	•	•	•		•	•	•	•				•	•	•	•		
HG-2B			Finisher	2		•			•	•	•	•	•		•	•	•	•				•	•	•	•		
HG-2K			Keyway	2	•				•	•	•	•	•		•	•	•	•				•	•	•	•		
HGN-2			Finisher - Extended Neck	2	•				•	•	•	•	•		•	•	•	•				•	•	•	•		
HGA-2			Finisher - High Helix	2	•				•	•	•	•	•		•	•	•	•				•	•	•	•		
HPDM-2			Finisher - Drill Mill	2	Pointed end				•	•	•	•	•		•	•	•	•				•	•	•	•		
HG-3			General Purpose	3	•				•	•	•	•	•		•	•	•	•				•	•	•	•		
HG-4C			General Purpose	M	•				•	•	•	•	•			•	•	•				•	•	•	•		
HG-4MC			General Purpose	4	•				•	•	•	•	•			•	•	•				•	•	•	•		
HG-4B			General Purpose	4		•			•	•	•	•	•		•	•	•	•				•	•	•	•		
HG-4LL			Left Hand Helix / Cut	4	•				•	•	•	•	•		•	•	•	•				•	•	•	•		
CRE			Corner Radius	4				•	•	•	•	•	•		•	•	•	•				•	•	•	•		

M = Multi Flute




SCAN for information on all



CLEVELAND | WALTER

CATALOGS OR
GO TO: gfii.com/literature/cleveland

Style	Page	Product	Type																											
COBALT																														
HDC-2	Scan QR code above or request our MILLING catalog		Finisher	2	•						•	•			•		•	•	•							•		•		
HDC-4C			Finisher	4	•						•	•			•			•									•	•	•	
HGC-2			Finisher	2	•						•	•			•			•	•	•							•	•	•	
HGC-4C			Finisher	M	•						•	•			•				•		•							•	•	•
RG6			Rougher Fine Pitch	M	•						•	•			•				•		•							•	•	•
RG8			Rougher Coarse Pitch	M			•				•	•							•		•	•						•	•	•
POWDERED METAL																														
PM-4	Scan QR code above or request our MILLING catalog		Finisher	M	•						•	•	•		•		•		•								•	•	•	
PM-539R			Finisher High Helix	3	•				•					•		•		•	•	•							•	•	•	
PM-539L			Finisher - Left - High Helix/Cut	3	•										•			•	•	•							•	•	•	
PMRC-C			Rougher Coarse Profile	M	•						•	•			•			•		•								•	•	•
PMRF-C			Rougher Fine Profile	M	•						•	•			•				•		•	•						•	•	•
PM-538R			Rougher Coarse Profile	3	•				•						•				•	•	•							•	•	•

M = Multi Flute



SCAN for information on all



CLEVELAND | WALTER

CATALOGS OR

GO TO: gfii.com/literature/cleveland



SCAN

for information on all



CLEVELAND



WALTER

CATALOGS OR

GO TO: gfii.com/literature/cleveland

Style	Page	Product	Type	No. of Flutes	End			Application				Machining					Surface Treatment												
					Square	Ball	Chamfer	Radius	Steel	Stainless	Cast Iron	Non-Ferrous	High-Temp Alloy	Hardened Steel	Slot	Profile	Plunging	Ramping	Drilling	Chamfer	Slot w/ Radius	Bright	TiCN	TiAlN	AlCrN	AP-Max	T-Max		
CARBIDE																													
CEM-V-4R	Scan QR code above or request our MILLING catalog		Variable Index Ferrous Material	4	•				•	•	•		•	•	•	•	•			•	•		•			•			
CEM-V-4B			Variable Index Ferrous Material	4		•				•	•			•	•	•	•	•			•	•		•			•		
CEM-V2-5R			Variable Index Ferrous Material	5	•					•	•	•		•	•	•	•	•			•	•		•			•		
CEM-V3-7R			Steel Material	7	•					•	•	•		•	•	•	•	•			•	•		•			•		
CEM-V3-7RCB			Steel Material	5	•					•	•			•	•	•	•	•			•	•		•			•		
CEM-HPDE-5			Steel Material	5	•					•	•			•	•	•	•	•			•	•		•			•		
CEM-EMS-3			Steel Material	3	•					•	•	•		•	•	•	•	•	•			•	•		•			•	
CEM-EMS-5			Steel Material	5	•					•	•			•	•	•	•	•			•	•		•			•		

Tolerances for Solid Carbide End Mills

Cutting Diameter: 1/32" through 1": +0.000 - 0.002

Shank Diameter: h6

Tolerances for Solid Carbide End Mills																															
Cutting Diameter: 1/32" through 1": +0.000 – 0.002																															
Shank Diameter: h6																															



Product Index

SCAN for information on all




CLEVELAND | WALTER

CATALOGS OR

GO TO: gfii.com/literature/cleveland

Style	Page	Product	Type	No.																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
-------	------	---------	------	-----	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

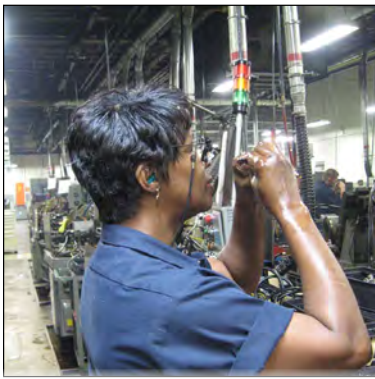

The name you've
trusted since 1874 for
quality cutting tools.

Cleveland is a superior cutting tooling brand providing solutions to industry for over 140 years. During their long history, they've earned a reputation for the highest quality tools, outstanding customer service, and expert engineering technical advice.

Whatever your tooling need, whether you're drilling, threading, or milling, contact your Greenfield distributor for the ultimate in product and support solutions.



The Cleveland tradition continues as part of **WALTER**.
Check out **WALTER** solutions designed to help you work better.





**MANUFACTURING FACILITY
AND U.S. HEADQUARTERS.**
Seneca, South Carolina



U.S. facility includes over 233,000 square feet for sales, engineering, manufacturing, and recycling. Our Cleveland brand is manufactured and shipped from Seneca, SC globally.



We have a unique ability to successfully custom-design products to meet our customers' needs. Our customer service, sales, and engineering staff is always ready to assist with your tooling requirements.

The uncompromising commitment to quality, along with the hard work of our employees, Cleveland products continue to be a trusted name for over 140 years.



Our exclusive raw material developed for our manufacturing allows Greenfield to lead the industry in unparalleled drills, end mills, taps, dies, and other specialty manufactured tools.

State-of-the-art machinery.

Manufactured in the U.S.A.

Quality product by quality people.

Knowledgeable and informed sales and engineering staff.





A HISTORY OF EXCELLENCE

1874

Cleveland Twist Drill established in Cleveland, Ohio.

1912

Greenfield Industries founded.



1995

Greenfield Industries purchases Cleveland Twist Drill.

2009

Greenfield Industries is acquired by TDC.

2014

TDC establishes Greenfield US and Canadian headquarters moving headquarters to Seneca, S.C., USA.

2024

Greenfield Industries joined WALTER Surface Technologies in 2024



The Cleveland® brand is well-known throughout the world for its wide selection of premium cutting tools for drilling, countersinking, reaming, threading, and milling operations. Its roots go back to the 1870's, when Cleveland Twist Drill was established as a premier cutting tool company in the United States. Cleveland has always been famous for the quality and reliability of its tools, and the company grew to be one of the largest high-speed steel toolmakers in the US, expanding to overseas markets.

In 1995, Cleveland Twist Drill was acquired by Greenfield Industries Inc. (GFII), a U.S. based manufacturer of precision cutting tools.





WALTER Surface Technologies acquired Greenfield U.S.A., Canada, & Mexico 2024

HELPING METALWORKERS ACHIEVE GREATNESS

In 1952, WALTER Surface Technologies was founded by a will to outperform and improve productivity. To this day, this unique customer-centric approach provides significant and measurable improvements and sets WALTER apart.

At WALTER, we believe that everyone has the potential to build, fabricate and construct great projects. With safer tools, productive consumables and a team of specialized metalworking specialists, workers are able to work better. We provide metalworkers with the means to achieve greatness through three pillars: Productivity, Safety and Customer Experience.

SOLUTIONS DESIGNED TO HELP YOU WORK BETTER.

- Metalworking
- Cutting Tools
- Safety Solutions



LEARN HOW WALTER CAN HELP YOU WORK BETTER!

PARTNERSHIP IN PRODUCTIVITY PROGRAMS

Our Partnership in Productivity Programs are all designed to help you work better and safer through the synergy of interconnected components.



THE BUCKET PROGRAM

Identify cost saving opportunities and improve worker safety



PRODUCTIVITY REPORTS

Measurably impact your business



PRODUCT DEMONSTRATION

Make fabricating & finishing processes more efficient at your worksite



SAFETY SEMINARS AND INDUSTRY TRAINING

Because health and safety are top priority



RISK-FREE TRIAL PROGRAM

Your total satisfaction is paramount to us

**ASK YOUR GREENFIELD OR WALTER TERRITORY MANAGER
HOW WE CAN HELP YOU WORK BETTER & ACHIEVE GREATNESS**

US

WALTER Surface Technologies

810 Day Hill Road
Windsor, CT 06095
Tel.: 1 800 522-0321
Fax: 1 866 274-4435
Email: info.us@walter.com

CANADA

WALTER Surface Technologies

5977 Trans Canada Highway
Pointe-Claire, Quebec, H9R 1C1
Tel.: 1 800 363-7368
Fax: 1 514 630-2825
Email: csr@walter.com

SOCIAL MEDIA

Facebook/
WalterSurfaceTech

LinkedIn/
Walter-Surface-Technologies


YouTube/
TheWalterNetwork

Instagram/
waltersurfacetech

BENEFITS OF DRILLS MADE WITH RECYCLED MATERIALS

RECYCLED HSS and Cobalt material is SUPERIOR to virgin material, as the more the product has been processed, the more HOMOGENOUS the material becomes, which helps prevent voids in the material with REDUCED CRACKING and BREAKING.

CIRCULAR JOURNEY OF OUR DRILL BITS

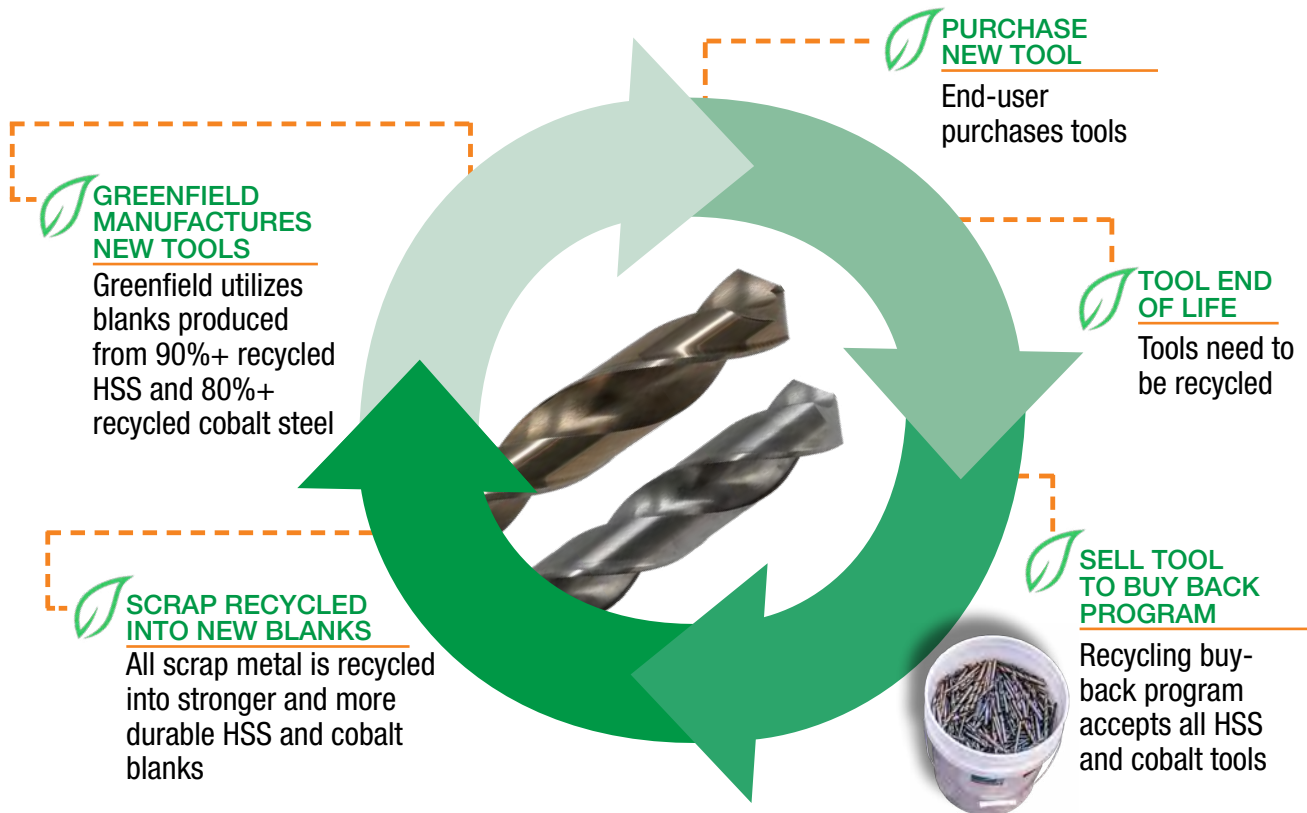

Stronger, longer lasting tools



Keeps metal out of landfills



Reduces new raw material extraction from the earth



Conserves energy



Reduces pollution



Recuperate costs by selling used materials to buy-back program



Call: (706) 305-7371 dparadis@greentech-smr.com



GreenTech was founded in 2012. They supply large volume, special recycled metals that can be further processed by global operations. GreenTech buys non-ferrous material that is industry specific from end-users, scrap and metal recyclers (including brokers), and local consumers.

Whether an industrial facility, manufacturing plant or a local shop, your business will realize the following benefits; raw material/ore preservation, energy conservation and cost stabilization. Contact us for a quote on your material or for a **free** evaluation.

PAGE 2

Holemaking
Drills, Reamers,
Counterbores



Threading
Taps, Thread Mills



Milling
End Mills



PAGE 137

Other Tools
Screw Extractors, Tool Bits





SEE OUR INDUSTRY SOLUTIONS

Our Cleveland brand is manufactured in high speed steel, cobalt, and carbide, as well as other materials, allowing us to provide quality products for a wide range of industries with our variety of tools.



- » Aerospace
- » Food and Beverage
- » Heavy Manufacturing
- » Medical
- » Oil/Gas/Chemical
- » Welding and Fabrication

SEE THEM ALL!



Metal Cutting Safety (read this before using Cleveland® products)

Modern metal cutting operations involve high energy, high spindle or cutter speeds, and high temperatures and cutting forces. Hot, flying chips may be projected from the workpiece during metal-cutting. Although advanced cutting tool materials are designed and manufactured to withstand the high cutting forces and temperatures that normally occur in these operations, they are susceptible to fragmenting in service, particularly if they are subjected to over-stress, severe impact or otherwise abused. Therefore, precautions should be taken to adequately protect workers, observers and equipment against hot, flying chips, fragmented cutting tools, broken work pieces or other similar projectiles. Machines should be fully guarded and personal protective equipment should be used at all times.

When grinding advanced cutting tool materials, a suitable means for collection and disposal of dust, mist or sludge should be provided. Overexposure to dust or mist containing metallic particles can be hazardous to health particularly if exposure continues over an extended period of time and may cause eye, skin and mucous membrane irritation and temporary or permanent respiratory disease. Certain existing pulmonary and skin conditions may be aggravated by exposure to dust or mist. Adequate ventilation, respiratory protection and eye protection should be provided when grinding and workers should avoid breathing of and prolonged skin contact with dust or mist.

General Industry Safety and Health Regulations, Part 1910, U.S. Department of Labor, published in Title 29 of the Code of Federal Regulations should be consulted. Obtain from Cleveland® and read the applicable Material Safety Data Sheet before grinding.

Cutting tools are only one part of the worker-machine-tool system. Many variables exist in machining operations, including the metal removal rate; the workpiece size, shape, strength and rigidity; the chucking and fixturing; the load carrying capability of centers; the cutter and spindle speed and torque limitations; the holder and boring bar overhang; the available power; and the condition of the tooling and the machine. A safe metal cutting operation must take all of these variables, and others, into consideration.

Cleveland® has no control over the end use of its products or the environment into which those products are placed. Cleveland® urges that its customers adhere to the recommended standards of use of their metal cutting operations. The information included throughout this catalog under the heading "Technical Data" and other recommendations on machining practices referred to herein are only advisory in nature and do not constitute representations or warranties and are not necessarily appropriate for any particular work environment or application.



WARNING: This product contains Cobalt and/or Nickel and/or Lead a chemical known to the state of California to cause cancer or birth defects or other reproductive harm.
For more information: www.P65Warnings.ca.gov




HOLEMAKING

Table of Content [D-2](#)

Screw Machine Length Drills
Stub Length Drills
Jobber Length Drills
Taper Length Drills
AC Extension Drills
Extra Length Drills
Taper Shank Drills
Miscellaneous Drills
Reamers
Counterbores

COST SAVING SETS

Complete list of
Holemaking Sets [D-113](#)




TECHNICAL INFORMATION

Nomenclature [D-115](#)
Material Class [D-116](#)
Operating Parameters [D-117](#)
Surface Treatments [D-118](#)
Special Drills [D-118](#)
Material Class [D-119](#)
Operating Parameters [D-120](#)
Drill Cutting Speeds [D-121](#)
Dimensional Specifications [D-124](#)
Shank / Tang [D-130](#)
Morse Taper Shank [D-130](#)
Reamers
Custom Reamers [D-131](#)
Reamer Speeds and Feeds [D-133](#)
Tolerances / Regrinding [D-134](#)
Reamer Cutting Speeds [D-135](#)

TECH TIPS

Split Point versus Traditional Point [D-2](#)
Benefits of 2133 Cobalt Screw Machine Drill. [D-28](#)
Bright vs. Surface Treated Tools. [D-40](#)
Morse Taper Shank Specifications. [D-70](#)
Using Spotting and Centering Drills. [D-90](#)
Point Angle: 90° vs 120°. [D-90](#)
Using Drill Drifts [D-95](#)
How to Select Correct Reamer Style [D-96](#)
Aircraft Type Counterbores. [D-108](#)
Clearance or Taper Router [D-110](#)

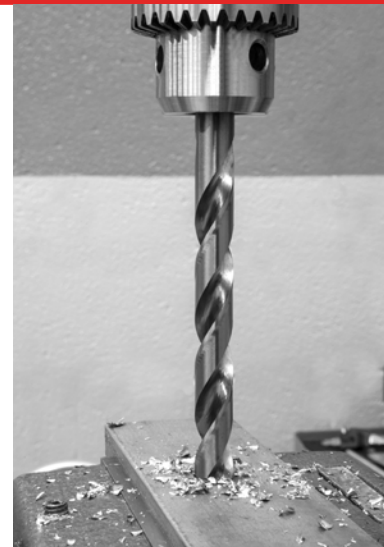

SURFACE TREATMENT



Additional treatments available upon request.





- * 1-1/16" through 1-1/4" drills have 1" diameter reduced shank.
- Operating parameters: See Technical section

ASME
B94.11M

HSS

118°


Helix
Regular
21° to 34°

Straight
Shank

Reduced
Shank

Surface
Treatment

Bright

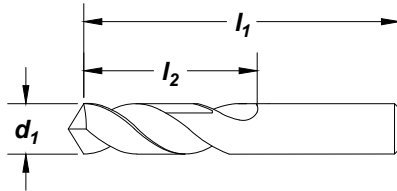

Feature:

Short length design for improved accuracy and rigidity.

drill diameter d₁	decimal	overall length	flute length	order number
fraction wire/let	equiv.	l₁ (in)	l₂ (in)	2120
60	.0400	1.375	.500	C04356
59	.0410	1.375	.500	C04357
58	.0420	1.375	.500	C04359
57	.0430	1.375	.500	C04360
56	.0465	1.375	.500	C04363
3/64	.0469	1.375	.500	C04364
55	.0520	1.625	.625	C04368
54	.0550	1.625	.625	C04370
53	.0595	1.625	.625	C04374
1/16	.0625	1.625	.625	C04376
52	.0635	1.688	.688	C04378
51	.0670	1.688	.688	C04381
50	.0700	1.688	.688	C04383
49	.0730	1.688	.688	C04386
48	.0760	1.688	.688	C04388
5/64	.0781	1.688	.688	C04390
47	.0785	1.750	.750	C04391
46	.0810	1.750	.750	C04394
45	.0820	1.750	.750	C04395
44	.0860	1.750	.750	C04398
43	.0890	1.750	.750	C04401
42	.0935	1.750	.750	C04404
3/32	.0938	1.750	.750	C04405
41	.0960	1.813	.813	C04407
40	.0980	1.813	.813	C04409
39	.0995	1.813	.813	C04411
38	.1015	1.813	.813	C04412
37	.1040	1.813	.813	C04414
36	.1065	1.813	.813	C04416
7/64	.1094	1.813	.813	C04418
35	.1100	1.875	.875	C04419
34	.1110	1.875	.875	C04421
33	.1130	1.875	.875	C04422
32	.1160	1.875	.875	C04424
31	.1200	1.875	.875	C04426
1/8	.1250	1.875	.875	C04428
30	.1285	1.938	.938	C04431
29	.1360	1.938	.938	C04434
28	.1405	1.938	.938	C04436
9/64	.1406	1.938	.938	C04437

drill diameter d₁	decimal	overall length	flute length	order number
fraction wire/let	equiv.	l₁ (in)	l₂ (in)	2120
27	.1440	2.063	1.000	C04439
26	.1470	2.063	1.000	C04441
25	.1495	2.063	1.000	C04443
24	.1520	2.063	1.000	C04445
23	.1540	2.063	1.000	C04447
5/32	.1562	2.063	1.000	C04448
22	.1570	2.125	1.063	C04449
21	.1590	2.125	1.063	C04451
20	.1610	2.125	1.063	C04452
19	.1660	2.125	1.063	C04455
18	.1695	2.125	1.063	C04458
11/64	.1719	2.125	1.063	C04459
17	.1730	2.188	1.125	C04460
16	.1770	2.188	1.125	C04462
15	.1800	2.188	1.125	C04464
14	.1820	2.188	1.125	C04466
13	.1850	2.188	1.125	C04467
3/16	.1875	2.188	1.125	C04470
12	.1890	2.250	1.188	C04471
11	.1910	2.250	1.188	C04473
10	.1935	2.250	1.188	C04475
9	.1960	2.250	1.188	C04476
8	.1990	2.250	1.188	C04478
7	.2010	2.250	1.188	C04480
13/64	.2031	2.250	1.188	C04481
6	.2040	2.375	1.250	C04482
5	.2055	2.375	1.250	C04484
4	.2090	2.375	1.250	C04487
3	.2130	2.375	1.250	C04489
7/32	.2188	2.375	1.250	C04491
2	.2210	2.438	1.313	C04493
1	.2280	2.438	1.313	C04496
A	.2340	2.438	1.313	C04499
15/64	.2344	2.438	1.313	C04500
B	.2380	2.500	1.375	C04502
C	.2420	2.500	1.375	C04504
D	.2460	2.500	1.375	C04506
1/4	E	.2500	2.500	C04509
F	.2570	2.625	1.438	C04513
G	.2610	2.625	1.438	C04515

continued on next page




drill diameter d₁	decimal equiv.	overall length l₁ (in)	flute length l₂ (in)	order number 2120
fraction wire/let				
17/64	.2656	2.625	1.438	C04517
H	.2660	2.688	1.500	C04519
I	.2720	2.688	1.500	C04522
J	.2770	2.688	1.500	C04524
K	.2810	2.688	1.500	C04526
9/32	.2812	2.688	1.500	C04531
L	.2900	2.750	1.563	C04530
M	.2950	2.750	1.563	C04533
19/64	.2969	2.750	1.563	C04535
N	.3020	2.813	1.625	C04537
5/16	.3125	2.813	1.625	C04542
O	.3160	2.938	1.688	C04544
P	.3230	2.938	1.688	C04547
21/64	.3281	2.938	1.688	C04550
Q	.3320	3.000	1.688	C04552
R	.3390	3.000	1.688	C04555
11/32	.3438	3.000	1.688	C04557
S	.3480	3.063	1.750	C04560
T	.3580	3.063	1.750	C04563
23/64	.3594	3.063	1.750	C04565
U	.3680	3.125	1.813	C04569
3/8	.3750	3.125	1.813	C04572
V	.3770	3.250	1.875	C04573
W	.3860	3.250	1.875	C04578
25/64	.3906	3.250	1.875	C04580
X	.3970	3.313	1.938	C04582
Y	.4040	3.313	1.938	C04584
13/32	.4062	3.313	1.938	C04585
Z	.4130	3.375	2.000	C04586
27/64	.4219	3.375	2.000	C04588
7/16	.4375	3.438	2.063	C04591
29/64	.4531	3.563	2.125	C04594
15/32	.4688	3.625	2.125	C04596
31/64	.4844	3.688	2.188	C04599
1/2	.5000	3.750	2.250	C04601
33/64	.5156	3.875	2.375	C04604

drill diameter d₁	decimal equiv.	overall length l₁ (in)	flute length l₂ (in)	order number 2120
fraction wire/let				
17/32	.5312	3.875	2.375	C04606
35/64	.5469	4.000	2.500	C04609
9/16	.5625	4.000	2.500	C04612
37/64	.5781	4.125	2.625	C04614
19/32	.5938	4.125	2.625	C04617
39/64	.6094	4.250	2.750	C04619
5/8	.6250	4.250	2.750	C04622
41/64	.6406	4.500	2.875	C04625
21/32	.6562	4.500	2.875	C04627
43/64	.6719	4.625	2.875	C04630
11/16	.6875	4.625	2.875	C04632
45/64	.7031	4.750	3.000	C04634
23/32	.7188	4.750	3.000	C04636
47/64	.7344	5.000	3.125	C04638
3/4	.7500	5.000	3.125	C04640
49/64	.7656	5.125	3.250	C04641
25/32	.7812	5.125	3.250	C04643
51/64	.7969	5.250	3.375	C04645
13/16	.8125	5.250	3.375	C04647
53/64	.8281	5.375	3.500	C04649
27/32	.8438	5.375	3.500	C04650
55/64	.8594	5.500	3.500	C04652
7/8	.8750	5.500	3.500	C04654
57/64	.8906	5.625	3.625	C04656
29/32	.9062	5.625	3.625	C04658
59/64	.9219	5.750	3.750	C04659
15/16	.9375	5.750	3.750	C04661
61/64	.9531	5.875	3.875	C04663
31/32	.9688	5.875	3.875	C04665
63/64	.9844	6.000	4.000	C04667
1	1.0000	6.000	4.000	C04668
1-1/16*	1.0625	6.250	4.000	C04675
1-1/8*	1.1250	6.375	4.000	C04683
1-3/16*	1.1875	6.625	4.250	C04690
1-1/4*	1.2500	6.750	4.375	C04697

* 1-1/16" through 1-1/4" drills have 1" shank.

General Purpose
Style: 2120

SET

29-Piece Set
#C00980

no. of pieces	surface treatment	size range	order number 2120
29	Bright	1/16" through 1/2" x 1/64"	C00980
26	Bright	letter A through Z	C01332

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				
	Bright	★		★				★		☆			

☆ = Best Performance

★ = Acceptable



Wide Land Parabolic - Q-Cobalt™

Styles: 2175, 2175-TN, 2175-TC, 2175-TA

♦ Operating parameters:
See Technical sectionASME
B94.11M

Cobalt


135° Split

Helix
High
35° to 45°Straight
ShankSurface
TreatmentStraw
Oxide

TiN

TiCN

TiAlN

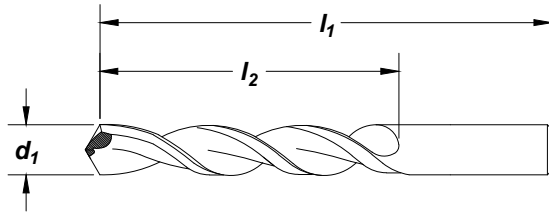**Feature:**

Effective deep hole drilling in a wide array of materials. Available coating for extended tool life and productivity. Shorter design for accuracy and rigidity.

drill diameter		decimal equivalent	overall length		order number			
fraction	wire/letter		l_1 (in)	l_2 (in)	2175 straw oxide	2175-TN TiN	2175-TC TiCN	2175-TA TiAlN
1/16		.0625	1.625	.625	C14200	C14321	C15250	C15050
	52	.0635	1.688	.688	—	C14439	—	—
	48	.0760	1.688	.688	—	C14435	—	—
5/64		.0781	1.688	.688	C14201	C14322	C15251	C15051
	47	.0785	1.750	.750	—	C14434	—	—
	45	.0820	1.750	.750	—	C14432	—	—
	44	.0860	1.750	.750	—	C14431	—	—
	43	.0890	1.750	.750	—	C14430	—	—
	42	.0935	1.750	.750	—	C14429	—	—
		.0938	1.750	.750	C14202	C14323	C15252	C15052
3/32	40	.0980	1.813	.813	C14280	C14402	C15330	C15130
	39	.0995	1.813	.813	C14279	C14401	C15329	C15129
	38	.1015	1.813	.813	C14278	C14400	C15328	C15128
	37	.1040	1.813	.813	C14277	C14399	C15327	C15127
	36	.1065	1.813	.813	C14276	C14398	C15326	C15126
		.1094	1.813	.813	C14203	C14324	C15253	C15053
	35	.1100	1.875	.875	C14275	C14397	C15325	C15125
	34	.1110	1.875	.875	C14274	C14396	C15324	C15124
7/64	33	.1130	1.875	.875	C14273	C14395	C15323	C15123
	32	.1160	1.875	.875	C14272	C14393	C15322	C15122
	31	.1200	1.875	.875	C14271	C14392	C15321	C15121
		.1250	1.875	.875	C14204	C14325	C15254	C15054
	30	.1285	1.938	.938	C14270	C14391	C15320	C15120
	29	.1360	1.938	.938	C14269	C14390	C15319	C15119
	28	.1405	1.938	.938	C14268	C14389	C15318	C15118
9/64		.1406	1.938	.938	C14205	C14326	C15255	C15055
	27	.1440	2.063	1.000	C14267	C14388	C15317	C15117
	26	.1470	2.063	1.000	C14266	C14387	C15316	C15116
	25	.1495	2.063	1.000	C14265	C14386	C15315	C15115
	24	.1520	2.063	1.000	C14264	C14385	C15314	C15114
	23	.1540	2.063	1.000	C14263	C14384	C15313	C15113
		.1562	2.063	1.000	C14206	C14327	C15256	C15056
5/32	22	.1570	2.125	1.063	C14262	C14383	C15312	C15112
	21	.1590	2.125	1.063	C14261	C14382	C15311	C15111
	20	.1610	2.125	1.063	C14260	C14381	C15310	C15110
	19	.1660	2.125	1.063	C14259	C14380	C15309	C15109
	18	.1695	2.125	1.063	C14258	C14379	C15308	C15108
		.1719	2.125	1.063	C14207	C14328	C15257	C15057
11/64	17	.1730	2.188	1.125	C14257	C14378	C15307	C15107

continued on next page



drill diameter		decimal equivalent	overall length		order number			
fraction	d ₁ wire/letter		l ₁ (in)	flute length l ₂ (in)	2175 straw oxide	2175-TN TiN	2175-TC TiCN	2175-TA TiAlN
	16	.1770	2.188	1.125	C14256	C14377	C15306	C15106
	15	.1800	2.188	1.125	C14255	C14376	C15305	C15105
	14	.1820	2.188	1.125	C14254	C14375	C15304	C15104
	13	.1850	2.188	1.125	C14253	C14374	C15303	C15103
3/16		.1875	2.188	1.125	C14208	C14329	C15258	C15058
	12	.1890	2.250	1.188	C14252	C14373	C15302	C15102
	11	.1910	2.250	1.188	C14251	C14372	C15301	C15101
	10	.1935	2.250	1.188	C14250	C14371	C15300	C15100
	9	.1960	2.250	1.188	C14249	C14370	C15299	C15099
	8	.1990	2.250	1.188	C14248	C14369	C15298	C15098
	7	.2010	2.250	1.188	C14247	C14368	C15297	C15097
13/64		.2031	2.250	1.188	C14209	C14330	C15259	C15059
	6	.2040	2.375	1.250	C14246	C14367	C15296	C15096
	5	.2055	2.375	1.250	C14245	C14366	C15295	C15095
	4	.2090	2.375	1.250	C14244	C14365	C15294	C15094
	3	.2130	2.375	1.250	C14243	C14364	C15293	C15093
7/32		.2188	2.375	1.250	C14210	C14331	C15260	C15060
	2	.2210	2.438	1.313	C14242	C14363	C15292	C15092
	1	.2280	2.438	1.313	C14241	C14362	C15291	C15091
15/64		.2344	2.438	1.313	C14211	C14332	C15261	C15061
	D	.2460	2.500	1.375	C14284	—	C15334	C15134
1/4	E	.2500	2.500	1.375	C14212	C14333	C15262	C15062
	F	.2570	2.625	1.438	C14286	—	C15335	C15135
	G	.2610	2.625	1.438	C14287	—	C15336	C15136
17/64		.2656	2.625	1.438	C14213	C14334	C15263	C15063
	H	.2660	2.688	1.500	C14288	—	C15337	C15137
	K	.2810	2.688	1.500	C14291	—	C15340	C15140
9/32		.2812	2.688	1.500	C14214	C14335	C15264	C15064
	L	.2900	2.750	1.563	C14292	—	C15341	C15141
19/64		.2969	2.750	1.563	C14215	C14336	C15265	C15065
5/16		.3125	2.813	1.625	C14216	C14337	C15266	C15066
	P	.3230	2.938	1.688	C14296	—	C15345	C15145
21/64		.3281	2.938	1.688	C14217	C14338	C15267	C15067
	Q	.3320	3.000	1.688	C14297	C14418	C15346	C15146
	R	.3390	3.000	1.688	C14298	C14419	C15347	C15147
11/32		.3438	3.000	1.688	C14218	C14339	C15268	C15068
	S	.3480	3.063	1.750	C14299	C14420	C15348	C15148
	T	.3580	3.063	1.750	—	C14421	—	—
23/64		.3594	3.063	1.750	C14219	C14340	C15269	C15069
	U	.3680	3.125	1.813	C14301	—	C15350	C15150
3/8		.3750	3.125	1.813	C14220	C14341	C15270	C15070
	V	.3770	3.250	1.875	C14302	—	C15351	C15151

continued on next page

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	13-38	>38	16-38	> 38	300 Series	400 series		18-22	22-32				
	Hardness												
TiN	★		★										
TiCN	☆		☆		★	★		★	★	☆			
TiAlN					☆	☆		☆	☆				

☆ = Best Performance ★ = Acceptable



Wide Land Parabolic - Q-Cobalt™

Styles: **2175, 2175-TN, 2175-TC, 2175-TA** (continued)

Screw Machine Length

Cobalt

drill diameter		decimal equivalent	overall length		order number			
fraction	d ₁ wire/letter		l ₁ (in)	flute length l ₂ (in)	2175 straw oxide	2175-TN TiN	2175-TC TiCN	2175-TA TiAlN
	W	.3860	3.250	1.875	—	C14424	—	—
25/64		.3906	3.250	1.875	C14221	C14342	C15271	C15071
	X	.3970	3.313	1.938	—	C14425	—	—
13/32		.4062	3.313	1.938	C14222	C14343	C15272	C15072
	Z	.4130	3.375	2.000	C14306	—	C15355	C15155
27/64		.4219	3.375	2.000	C14223	C14344	C15273	C15073
7/16		.4375	3.438	2.063	C14224	C14345	C15274	C15074
29/64		.4531	3.563	2.125	C14225	C14346	C15275	C15075
15/32		.4688	3.625	2.125	C14226	C14347	C15276	C15076
31/64		.4844	3.688	2.188	C14227	C14348	C15277	C15077
1/2		.5000	3.750	2.250	C14228	C14349	C15278	C15078
33/64		.5156	3.875	2.375	C14229	C14350	C15279	C15079
17/32		.5312	3.875	2.375	C14230	C14351	C15280	C15080
35/64		.5469	4.000	2.500	C14231	C14352	C15281	C15081
9/16		.5625	4.000	2.500	C14232	C14353	C15282	C15082
37/64		.5781	4.125	2.625	C14233	C14354	C15283	C15083
19/32		.5938	4.125	2.625	C14234	C14355	C15284	C15084
39/64		.6094	4.250	2.750	C14235	C14356	C15285	C15085
5/8		.6250	4.250	2.750	C14236	C14357	C15286	C15086
41/64		.6406	4.500	2.875	C14237	C14358	C15287	C15087
21/32		.6562	4.500	2.875	C14238	C14359	C15288	C15088
43/64		.6719	4.625	2.875	C14239	C14360	C15289	C15089
11/16		.6875	4.625	2.875	C14240	C14361	C15290	C15090

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series						
	TiN	★		★									
	TiCN	☆		☆		★	★	★	★		☆		
	TiAlN					☆	☆	☆	☆				


☆ = Best Performance ★ = Acceptable



- ♦ Operating parameters:
See Technical section

NAS 907
TYPE C

HSS

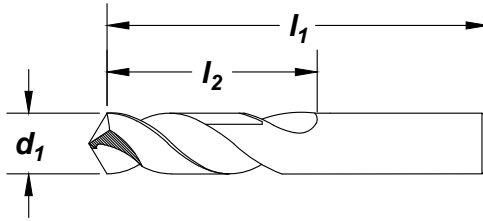Surface
Treatment

Screw Machine Length

High Speed Steel

Feature:

Heavy duty design for tougher materials.

drill diameter		decimal equivalent	overall length		flute length		order number 2330
fraction	wire		l_1 (in)		l_2 (in)		
*3/64		.0469	1.375		.500		C70250
1/16		.0625	1.625		.625		C70251
	52	.0635	1.688		.688		C70356
	51	.0670	1.688		.688		C70355
	50	.0700	1.688		.688		C70354
	49	.0730	1.688		.688		C70353
	48	.0760	1.688		.688		C70352
5/64		.0781	1.688		.688		C70252
	47	.0785	1.750		.750		C70351
	46	.0810	1.750		.750		C70350
	45	.0820	1.750		.750		C70349
	44	.0860	1.750		.750		C70348
	43	.0890	1.750		.750		C70347
	42	.0935	1.750		.750		C70346
3/32		.0938	1.750		.750		C70253
	41	.0960	1.813		.813		C70345
	40	.0980	1.813		.813		C70344
	39	.0995	1.813		.813		C70343
	38	.1015	1.813		.813		C70342
	37	.1040	1.813		.813		C70341
	36	.1065	1.813		.813		C70340
7/64		.1094	1.813		.813		C70254
	35	.1100	1.875		.875		C70339
	34	.1110	1.875		.875		C70338
	33	.1130	1.875		.875		C70337
	32	.1160	1.875		.875		C70336
	31	.1200	1.875		.875		C70335
1/8		.1250	1.875		.875		C70255
	30	.1285	1.938		.938		C70334
	29	.1360	1.938		.938		C70333
	28	.1405	1.938		.938		C70332
9/64		.1406	1.938		.938		C70256

*Not split point.

continued on next page

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series						
	Bright	☆		☆		♦			☆	☆	♦		

☆ = Best Performance ♦ = Acceptable



Aircraft NAS 907, Type C - Heavy Duty

Style: **2330** (continued)

Screw Machine Length

High Speed Steel

drill diameter		decimal equivalent	overall length	flute length	order number 2330
fraction	wire		l ₁ (in)	l ₂ (in)	
5/32	27	.1440	2.063	1.000	C70331
	26	.1470	2.063	1.000	C70330
	25	.1495	2.063	1.000	C70329
	24	.1520	2.063	1.000	C70328
	23	.1540	2.063	1.000	C70327
		.1562	2.063	1.000	C70257
	22	.1570	2.125	1.063	C70326
	21	.1590	2.125	1.063	C70325
	20	.1610	2.125	1.063	C70324
	19	.1660	2.125	1.063	C70323
11/64	18	.1695	2.125	1.063	C70322
		.1719	2.125	1.063	C70258
	17	.1730	2.188	1.125	C70321
	16	.1770	2.188	1.125	C70320
	15	.1800	2.188	1.125	C70319
	14	.1820	2.188	1.125	C70318
3/16	13	.1850	2.188	1.125	C70317
		.1875	2.188	1.125	C70259
	12	.1890	2.250	1.188	C70316
	11	.1910	2.250	1.188	C70315
	10	.1935	2.250	1.188	C70314
	9	.1960	2.250	1.188	C70313
	8	.1990	2.250	1.188	C70312
	7	.2010	2.250	1.188	C70311
13/64		.2031	2.250	1.188	C70260
	6	.2040	2.375	1.250	C70310
	5	.2055	2.375	1.250	C70309
	4	.2090	2.375	1.250	C70308
7/32	3	.2130	2.375	1.250	C70307
		.2188	2.375	1.250	C70261
	2	.2210	2.438	1.313	C70306
	1	.2280	2.438	1.313	C70305
	A	.2340	2.438	1.313	C70280
15/64		.2344	2.438	1.313	C70262
	B	.2380	2.500	1.375	C70281
	C	.2420	2.500	1.375	C70282
	D	.2460	2.500	1.375	C70283
1/4	E	.2500	2.500	1.375	C70263
	F	.2570	2.625	1.438	C70284
	G	.2610	2.625	1.438	C70285
17/64		.2656	2.625	1.438	C70264
	H	.2660	2.688	1.500	C70286
	I	.2720	2.688	1.500	C70287
	J	.2770	2.688	1.500	C70288
9/32		.2812	2.688	1.500	C70265
	K	.2812	2.688	1.500	C70289
	L	.2900	2.750	1.563	C70290
	M	.2950	2.750	1.563	C70291
19/64		.2969	2.750	1.563	C70266
	N	.3020	2.813	1.625	C70292
5/16		.3125	2.813	1.625	C70267
	O	.3160	2.813	1.688	C70293
	P	.3230	2.813	1.688	C70294
21/64		.3281	2.813	1.688	C70268
	Q	.3320	3.000	1.688	C70295
	R	.3390	3.000	1.688	C70296

continued on next page



drill diameter d ₁		decimal equivalent	overall length		flute length		order number 2330
fraction	wire		l ₁ (in)		l ₂ (in)		
11/32		.3438	3.000		1.688		C70269
	S	.3480	3.063		1.750		C70297
	T	.3580	3.063		1.750		C70298
23/64		.3594	3.063		1.750		C70270
	U	.3680	3.125		1.813		C70299
3/8		.3750	3.125		1.813		C70271
	V	.3770	3.250		1.875		C70300
	W	.3860	3.250		1.875		C70301
25/64		.3906	3.250		1.875		C70272
	X	.3970	3.313		1.938		C70302
	Y	.4040	3.313		1.938		C70303
13/32		.4062	3.313		1.938		C70273
	Z	.4130	3.375		2.000		C70304
27/64		.4219	3.375		2.000		C70274
7/16		.4375	3.438		2.063		C70275
29/64		.4531	3.563		2.125		C70276
15/32		.4688	2.625		2.125		C70277
31/64		.4844	3.688		2.188		C70278
1/2		.5000	3.750		2.250		C70279

Screw Machine Length

High Speed Steel

Aircraft NAS 907, Type C - Heavy Duty

Style: 2330

SET

29-Piece Set
#C70368

no. of pieces	surface treatment	size range	order number 2330
15	Bright	1/16" through 1/2" x 1/32"	C70370
21	Bright	1/16" through 3/8" x 1/64"	C70369
29	Bright	1/16" through 1/2" x 1/64"	C70368

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				>45
	Bright	☆		☆		◆		☆	☆	◆			

☆ = Best Performance

◆ = Acceptable



Heavy Duty

Styles: 2133, 2133-TC



Screw Machine Length

Cobalt

- ♦ Operating parameters:
See Technical section


ASME
B94.11MDIN
1897

Cobalt

135° Split

Helix
Regular
21° to 34°Straight
ShankSurface
TreatmentStraw
Oxide

TiCN

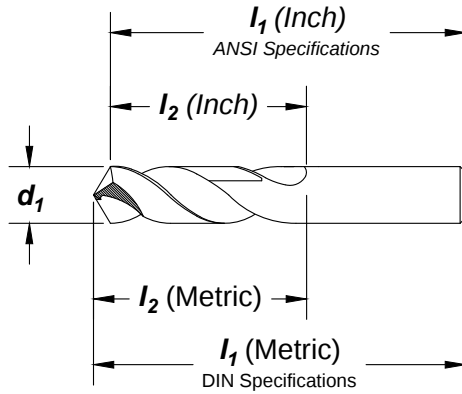**Feature:**

Highly heat resistant substrate for tough to machine materials.

drill diameter			overall length		flute length		order number	
	d_1			I_1		I_2	2133	2133-TC
fraction	wire/letter	mm	decimal equivalent	in	mm	in	straw oxide	TiCN
	*60		.0400	1.375		.500	C14501	—
	*59		.0410	1.375		.500	C14502	—
	*58		.0420	1.375		.500	C14504	—
	*57		.0430	1.375		.500	C14505	—
	*56		.0465	1.375		.500	C14508	—
*3/64			.0469	1.375		.500	C14509	—
		*1.2	.0472		30.00	8.00	C14835	—
	*55		.0520	1.625		.625	C14513	—
	*54		.0550	1.625		.625	C14515	—
		*1.5	.0591		32.00	9.00	C14838	—
	*53		.0595	1.625		.625	C14519	—
1/16			.0625	1.625		.625	C14521	C14846
		1.6	.0630		34.00	10.00	C14748	—
	52		.0635	1.688		.688	C14523	—
	51		.0670	1.688		.688	C14526	—
	50		.0700	1.688		.688	C14528	—
	49		.0730	1.688		.688	C14531	—
	48		.0760	1.688		.688	C14533	—
5/64			.0781	1.688		.688	C14535	C14847
	47		.0785	1.750		.750	C14536	—
		2.0	.0787		38.00	12.00	C14800	C14749
	46		.0810	1.750		.750	C14539	—
	45		.0820	1.750		.750	C14540	—
	44		.0860	1.750		.750	C14543	—
	43		.0890	1.750		.750	C14546	—
	42		.0935	1.750		.750	C14549	—
3/32			.0938	1.750		.750	C14550	C14848
		2.4	.0945		43.00	14.00	C14790	—
	41		.0960	1.813		.813	C14552	—
		2.45	.0965	1.692	43.00	.551	C14789	—
	40		.0980	1.813		.813	C14554	—

*Not split point.

continued on next page



BENEFITS OF 2133 COBALT SCREW MACHINE DRILL

- Cobalt provides high heat resistance for tough applications.
- Short flutes provide enhanced rigidity and drill more accurate holes.



drill diameter			decimal equivalent	overall length		flute length		order number	
fraction	d ₁ wire/letter	mm		l ₁		l ₂		2133 straw oxide	2133-TC TiCN
		2.5	.0984	1.693	43.00	.551	14.00	C14820	C14750
	39		.0995	1.813		.813		C14556	—
	38		.1015	1.813		.813		C14557	—
		2.6	.1024	1.693	43.00	.551	14.00	C14840	C14730
	37		.1040	1.813		.813		C14559	—
	36		.1065	1.813		.813		C14561	—
7/64			.1094	1.813		.813		C14562	C14849
	35		.1100	1.875		.875		C14563	—
		2.8	.1102		46.00		16.00	C14841	—
	34		.1110	1.875		.875		C14565	—
	33		.1130	1.875		.875		C14566	—
	32		.1160	1.875		.875		C14568	—
		3.0	.1181		46.00		16.00	C14821	C14751
	31		.1200	1.875		.875		C14570	—
		3.1	.1220		49.00		18.00	C14822	C14752
1/8			.1250	1.875		.875		C14572	C14850
		3.2	.1260		49.00		18.00	C14801	C14753
	30		.1285	1.938		.938		C14574	—
		3.3	.1299		49.00		18.00	C14802	C14754
	29		.1360	1.938		.938		C14577	—
		3.5	.1378		52.00		20.00	C14803	C14755
	28		.1405	1.938		.938		C14579	—
9/64			.1406	1.938		.938		C14580	C14851
	27		.1440	2.063		1.000		C14582	—
		3.7	.1457		52.00		20.00	C14823	—
	26		.1470	2.063		1.000		C14584	—
	25		.1495	2.063		1.000		C14585	—
	24		.1520	2.063		1.000		C14587	—
	23		.1540	2.063		1.000		C14589	—
5/32			.1562	2.063		1.000		C14590	C14852
	22		.1570	2.125		1.063		C14591	—
		4.0	.1575		55.00		22.00	C14824	C14756
	21		.1590	2.125		1.063		C14593	—
	20		.1610	2.125		1.063		C14594	—
		4.1	.1614		55.00		22.00	C14825	C14757
		4.2	.1654		55.00		22.00	C14804	C14758
	19		.1660	2.125		1.063		C14597	—
	18		.1695	2.125		1.063		C14599	—
11/64			.1719	2.125		1.063		C14600	C14853
	17		.1730	2.188		1.125		C14601	—
	16		.1770	2.188		1.125		C14603	—
		4.5	.1772		58.00		24.00	C14805	C14759
	15		.1800	2.188		1.125		C14605	—
		4.6	.1811		58.00		24.00	C14842	C14728
	14		.1820	2.188		1.125		C14607	—
	13		.1850	2.188		1.125		C14608	—
3/16			.1875	2.188		1.125		C14610	C14854
		4.8	.1890		62.00		26.00	C14806	C14760
	12		.1890	2.250		1.188		C14611	—

continued on next page

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	13-38	>38	16-38	> 38	300 Series	400 series		18-22	22-32				
Hardness	13-38	>38	16-38	> 38	300 Series	400 series		18-22	22-32				>45
Straw	★		★		★	★		★	★				
TiCN	☆		☆		☆	☆		☆	☆	☆	★	★	
☆ = Best Performance ★ = Acceptable													

Aircraft NAS 907, Type K - Heavy Duty
Styles: **2133, 2133-TC** (continued)

Screw Machine Length

Cobalt

drill diameter			decimal equivalent	overall length		flute length		order number	
fraction	d ₁ wire/letter	mm		l ₁		l ₂		2133 straw oxide	2133-TC TiCN
	11		.1910	2.250		1.188		C14613	—
		4.9	.1929		62.00		26.00	C14826	—
	10		.1935	2.250		1.188		C14615	—
	9		.1960	2.250		1.188		C14616	—
		5.0	.1969		62.00		26.00	C14827	C14761
	8		.1990	2.250		1.188		C14618	—
		5.1	.2008		62.00		26.00	C14807	C14762
	7		.2010	2.250		1.188		C14620	—
13/64			.2031	2.250		1.188		C14621	C14855
	6		.2040	2.375		1.250		C14622	—
	5		.2055	2.375		1.250		C14624	—
		5.3	.2087	2.440	62.00	1.023	26.00	C14625	—
	4		.2090	2.375		1.250		C14626	—
	3		.2130	2.375		1.250		C14628	—
		5.5	.2165		66.00		28.00	C14828	C14786
7/32			.2188	2.375		1.250		C14630	C14856
		5.6	.2205		66.00		28.00	C14843	—
	2		.2210	2.438		1.313		C14632	—
		5.7	.2244		66.00		28.00	C14844	—
	1		.2280	2.438		1.313		C14634	—
	A		.2340	2.438		1.313		C14637	—
15/64			.2344	2.438		1.313		C14638	C14857
		6.0	.2362		66.00		28.00	C14829	C14763
	B		.2380	2.500		1.375		C14640	—
		6.1	.2402		70.00		31.00	C14869	—
	C		.2420	2.500		1.375		C14642	—
	D		.2460	2.500		1.375		C14644	—
1/4, E	E		.2500	2.500		1.375		C14646	C14858
		6.5	.2559		70.00		31.00	C14808	C14764
	F		.2570	2.625		1.438		C14649	—
		6.6	.2598		70.00		31.00	C14809	—
	G		.2610	2.625		1.438		C14651	—
17/64			.2656	2.625		1.438		C14653	C14859
	H		.2660	2.688		1.500		C14654	—
		6.8	.2677		74.00		34.00	C14810	C14765
	I		.2720	2.688		1.500		C14657	—
		7.0	.2756		74.00		34.00	C14830	C14766
	J		.2770	2.688		1.500		C14659	—
	K		.2810	2.688		1.500		C14661	—
9/32			.2812	2.688		1.500		C14664	C14860
		7.3	.2874	2.913	74.00	1.338	34.00	C14663	—
	L		.2900	2.750		1.563		C14665	—
		7.4	.2913		74.00		34.00	C14811	—
	M		.2950	2.750		1.563		C14667	—
		7.5	.2953		74.00		34.00	C14831	C14787
19/64			.2969	2.750		1.563		C14669	—
	N		.3020	2.813		1.625		C14671	—
5/16			.3125	2.813		1.625		C14675	C14861
		8.0	.3150		79.00		37.00	C14812	C14767
	O		.3160	2.938		1.688		C14677	—
		8.1	.3189		79.00		37.00	C14670	—
	P		.3230	2.938		1.688		C14680	—
21/64			.3281	2.938		1.688		C14682	—
	Q		.3320	3.000		1.688		C14684	—
		8.5	.3346		79.00		37.00	C14813	C14768
	R		.3390	3.000		1.688		C14687	—
11/32			.3438	3.000		1.688		C14689	C14862

continued on next page



drill diameter			decimal equivalent	overall length		flute length		order number	
fraction	d ₁ wire/letter	mm		in l ₁	mm	in l ₂	mm	2133 straw oxide	2133-TC TiCN
23/64	S	9.0	.3480	3.063		1.750		C14691	—
			.3543		84.00		40.00	C14814	C14769
	T	9.3	.3580	3.063		1.750		C14694	—
			.3594	3.063		1.750		C14696	—
3/8	U	9.5	.3661	3.375	85.72	2.000	50.80	C14871	—
			.3680	3.125		1.813		C14699	—
	V	10.0	.3740		84.00		40.00	C41872	C14770
			.3750	3.125		1.813		C14702	C14863
25/64	W	10.5	.3770	3.250		1.875		C14703	—
			.3860	3.250		1.875		C14707	—
	X	11.0	.3906	3.250		1.875		C14709	—
			.3937		89.00		43.00	C14815	C14771
27/64	Y	11.5	.3970	3.313		1.938		C14711	—
			.4040	3.313		1.938		C14713	—
	Z	12.0	.4062	3.313		1.938		C14715	C14864
			.4130	3.375		2.000		C14716	—
7/16		12.5	.4134		89.00		43.00	C14816	C14788
			.4219	3.375		2.000		C14718	—
		13/32	.4331		95.00		47.00	C14817	C14772
			.4375	3.438		2.063		C14721	C14865
29/64		14/32	.4528		95.00		47.00	C14832	C14773
			.4531	3.563		2.125		C14724	—
		15/32	.4688	3.625		2.125		C14726	C14867
			.4724		102.00		51.00	C14818	C14774
31/64		16/32	.4844	3.688		2.188		C14729	—
			.4921		102.00		51.00	C14819	C14775
	1/2		.5000	3.750		2.250		C14731	C14866

Screw Machine Length


Cobalt

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	13-38	>38	16-38	> 38	300 Series	400 series		18-22	22-32				
Hardness	13-38	>38	16-38	> 38	300 Series	400 series		18-22	22-32				>45
Straw	★		★		★	★		★	★				
TiCN	☆		☆		☆	☆		☆	☆	☆	★	★	
☆ = Best Performance ★ = Acceptable													

**Spade Drill**
Style: 1765Surface
Treatment

Stub Length

Carbide

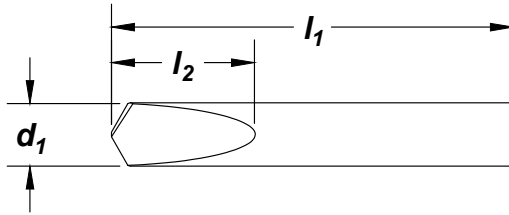

cutting diameter		overall length		order number
d1 fraction	decimal equivalent	l1 (in)	flute length l2 (in)	
1/32	.0313	1-1/2	3/16	C89705
1/16	.0625	1-1/2	5/16	C89706
3/32	.0938	1-1/2	3/8	C89707
1/8	.1250	1-1/2	7/16	C89708
5/32	.1562	2	15/32	C89709
3/16	.1875	2	9/16	C89710
7/32	.2188	2	19/32	C89711
1/4	.2500	2	11/16	C89712
9/32	.2812	2-1/2	3/4	C89714
5/16	.3125	2-1/2	7/8	C89715
11/32	.3438	2-1/2	15/16	C89716
3/8	.3750	2-1/2	1-1/16	C89713

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				
	Bright	☆	◆	☆	◆	◆		☆	◆				◆

☆ = Best Performance ◆ = Acceptable


ASME
B94.11M

Carbide

118° 4-Facet

Helix
Regular
21° to 34°Straight
ShankSurface
Treatment

Bright

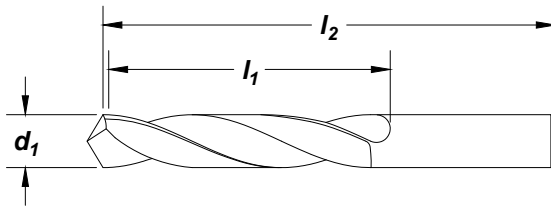

Stub Length

Carbide

cutting diameter		overall length		order number
d ₁ fraction	decimal equivalent(in)	l ₁ (in)	l ₂ (in)	
1/16	.0625	2	5/8	C89676
5/64	.0781	2	5/8	C89677
3/32	.0938	2	5/8	C89678
7/64	.1094	2	5/8	C89679
1/8	.1250	2	5/8	C89680
9/64	.1406	2	5/8	C89681
5/32	.1562	2-1/2	3/4	C89682
11/64	.1719	2-1/2	3/4	C89683
3/16	.1875	2-1/2	3/4	C89684
13/64	.2031	2-1/2	3/4	C89685
7/32	.2188	2-1/2	1	C89686
15/64	.2344	2-1/2	1	C89687
1/4	.2500	2-1/2	1	C89688
17/64	.2656	2-1/2	1	C89689
9/32	.2812	2-1/2	1	C89690
19/64	.2969	2-3/4	1-1/4	C89691
5/16	.3125	2-3/4	1-1/4	C89692
21/64	.3281	2-3/4	1-1/4	C89693
11/32	.3438	3	1-1/4	C89694
23/64	.3594	3	1-1/4	C89695
3/8	.3750	3	1-1/4	C89696
25/64	.3906	3	1-1/4	C89697
13/32	.4062	3	1-1/4	C89698
27/64	.4219	3	1-1/4	C89699
7/16	.4375	3	1-1/4	C89700
29/64	.4531	3	1-1/4	C89701
15/32	.4688	3	1-1/4	C89702
31/64	.4844	3	1-1/4	C89703
1/2	.5000	3	1-1/4	C89704

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				
Bright	☆	★	☆	★	★			☆	☆	★			★

☆ = Best Performance ★ = Acceptable



General Purpose

Styles: 2002, 2001, 2002-TC

♦ Operating parameters:
See Technical sectionASME
B94.11MDIN
338

HSS

118°

Helix
Regular
21° to 34°Straight
ShankSurface
Treatment


Bright

Black
Oxide

TiCN

Jobber Length

High Speed Steel

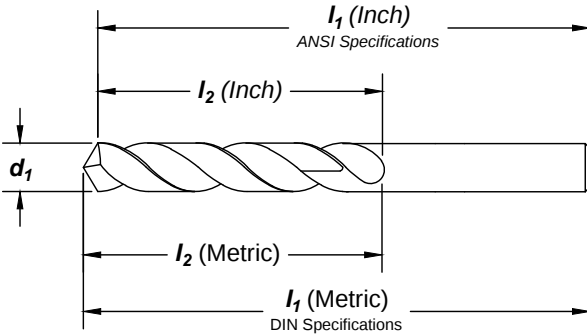

drill diameter			decimal equivalent	overall length		flute length		2002 bright	order number	
fraction	wire/letter	mm		I_1 in	mm	I_2 in	mm		2001 black oxide	2002-TC TiCN
80			.0135	.750		.125		C01799	C01012	—
		0.35	.0138		19.00		3.00	—	C01013	—
			.0145	.750		.188		C01801	C01014	—
79		0.38	.0150		19.00		4.00	—	C01015	—
			.0156	.750		.188		C01803	C01016	—
		0.40	.0157		20.00		5.00	—	C01017	—
1/64			.0160	.875		.188		C01805	C01018	—
			.0165		20.00		5.00	—	C01019	—
		0.45	.0177		20.00		5.00	—	C01020	—
78			.0180	.875		.188		C01808	C01021	—
			.0189		20.00		5.00	—	C01022	—
		0.50	.0197		22.00		6.00	—	C01023	—
77			.0200	.875		.188		C01811	C01024	—
			.0210	1.000		.250		C01812	C01025	—
		0.55	.0217		24.00		7.00	—	C01026	—
76			.0225	1.000		.250		C01814	C01027	—
			.0236		24.00		7.00	—	C01028	—
		0.60	.0240		1.125		.313	C01816	C01029	—
75			.0250	1.125		.313		C01817	C01030	—
			.0256		26.00		8.00	—	C01031	—
		0.65	.0260		26.00		8.00	—	C01032	—
74			.0260	1.250		.375		C01819	C01032	—
			.0276		28.00		9.00	—	C01033	—
		0.70	.0280		28.00		9.00	—	C01034	—
73			.0280	1.250		.375		C01821	C01034	—
			.0292	1.375		.500		C01822	C01035	—
		0.75	.0295		28.00		9.00	—	C01036	—
72			.0310	1.375		.500		C01824	C01037	—
			.0312	1.375		.500		C01825	C01038	—
		0.80	.0315		30.00		10.00	—	C01039	—
1/32			.0320	1.375		.500		C01827	C01040	—
			.0330	1.375		.500		C01828	C01041	—
		0.85	.0335		30.00		10.00	—	C01042	—
67			.0350	1.500		.625		C01830	C01043	—
			.0354		32.00		11.00	—	C01044	—
		0.90	.0360		32.00		11.00	—	C01045	—
66			.0360	1.500		.625		C01832	C01045	—

continued on next page



drill diameter			overall length		flute length		order number			
d ₁			l ₁		l ₂		2002	2001	2002-TC	
fraction	wire/letter	mm	decimal equivalent	in	mm	in	mm	bright	black oxide	TiCN
	63		.0370	1.500		.625		C01833	C01046	—
		0.95	.0374		32.00		11.00	—	C01047	—
	62		.0380	1.500		.625		C01835	C01048	—
	61		.0390	1.500		.688		C01836	C01049	—
		1.00	.0394		34.00		12.00	C72200	C71200	C73200
	60		.0400	1.625		.688		C72160	C71160	—
	59		.0410	1.625		.688		C72159	C71159	—
		1.05	.0413		34.00		12.00	—	C71201	—
	58		.0420	1.625		.688		C72158	C71158	—
	57		.0430	1.750		.750		C72157	C71157	—
		1.10	.0433		36.00		14.00	C72202	C71202	—
		1.15	.0453		36.00		14.00	—	C71203	—
	56		.0465	1.750		.750		C72156	C71156	—
3/64			.0469	1.750		.750		C72003	C71003	C73003
		1.20	.0472		38.00		16.00	C72204	C71204	—
		1.25	.0492		38.00		16.00	—	C71205	—
		1.30	.0512		38.00		16.00	C72206	C71206	—
	55		.0520	1.875		.875		C72155	C71155	—
		1.35	.0531		40.00		18.00	—	C71207	—
	54		.0550	1.875		.875		C72154	C71154	—
		1.40	.0551		40.00		18.00	C72208	C71208	—
		1.45	.0571		40.00		18.00	—	C71209	—
		1.50	.0591		40.00		18.00	C72210	C71210	C73210
	53		.0595	1.875		.875		C72153	C71153	—
		1.55	.0610		43.00		20.00	—	C71211	—
1/16			.0625	1.875		.875		C72004	C71004	C73004
		1.60	.0630		43.00		20.00	C72212	C71212	C73212
	52		.0635	1.875		.875		C72152	C71152	C73152
		1.65	.0650		43.00		20.00	—	C71213	—
		1.70	.0669		43.00		20.00	C72214	C71214	—
	51		.0670	2.000		1.000		C72151	C71151	C73151
		1.75	.0689		46.00		22.00	—	C71215	—
	50		.0700	2.000		1.000		C72150	C71150	C73150
		1.80	.0709		46.00		22.00	C72216	C71216	—
		1.85	.0728		46.00		22.00	—	C71217	—
	49		.0730	2.000		1.000		C72149	C71149	C73149
		1.90	.0748		46.00		22.00	C72218	C71218	—
	48		.0760	2.000		1.000		C72148	C71148	C73148
		1.95	.0767	1.929	49.00	.945	24.00	—	C71219	—
5/64			.0781	2.000	50.80	1.000	25.40	C72005	C71005	C73005
	47		.0785	2.000	50.80	1.000	25.40	C72147	C71147	C73147
		2.00	.0787	1.929	49.00	.945	24.00	C72220	C71220	C73220
		2.05	.0807	1.929	49.00	.945	24.00	—	C71221	—
	46		.0810	2.125		1.125		C72146	C71146	C73146
	45		.0820	2.125		1.125		C72145	C71145	C73145
		2.10	.0827		49.00		24.00	C72222	C71222	—
		2.15	.0846		53.00		27.00	—	C71223	—
	44		.0860	2.125		1.125		C72144	C71144	C73144
		2.20	.0866		53.00		27.00	C72224	C71224	—

Jobber Length

High Speed Steel

continued on next page

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				>45
	Bright									★			
Black Oxide	★					★		★					
TiCN	★			★		★		★		★			

★ = Best Performance ◆ = Acceptable



General Purpose

Styles: **2002, 2001, 2002-TC** (continued)

Jobber Length

High Speed Steel

drill diameter			decimal equivalent	overall length		flute length		2002 bright	order number	
fraction	wire/letter	mm		l ₁		l ₂			2001 black oxide	2002-TC TiCN
		2.25	.0886		53.00		27.00	—	C71225	—
	43		.0890	2.250		1.250		C72143	C71143	C73143
		2.30	.0906		53.00		27.00	C72226	C71226	—
		2.35	.0925		53.00		27.00	—	C71227	—
	42		.0935	2.250		1.250		C72142	C71142	C73142
3/32			.0938	2.250		1.250		C72006	C71006	C73006
		2.40	.0945		57.00		30.00	C72228	C71228	C73228
	41		.0960	2.375		1.375		C72141	C71141	C73141
		2.45	.0964		57.00		30.00	—	C71229	—
	40		.0980	2.375		1.375		C72140	C71140	C73140
		2.50	.0984		57.00		30.00	C72230	C71230	C73230
	39		.0995	2.375		1.375		C72139	C71139	C73139
	38		.1015	2.500		1.438		C72138	C71138	C73138
		2.60	.1024		57.00		30.00	C72231	C71231	—
	37		.1040	2.500		1.438		C72137	C71137	C73137
		2.70	.1062		61.00		33.00	C72232	C71232	—
	36		.1065	2.500		1.438		C72136	C71136	C73136
7/64			.1094	2.625		1.500		C72007	C71007	C73007
	35		.1100	2.625		1.500		C72135	C71135	C73135
		2.80	.1102		61.00		33.00	C72233	C71233	—
	34		.1110	2.625		1.500		C72134	C71134	C73134
	33		.1130	2.625		1.500		C72133	C71133	C73133
		2.90	.1142		61.00		33.00	C72234	C71234	—
	32		.1160	2.750		1.625		C72132	C71132	C73132
		3.00	.1181		61.00		33.00	C72235	C71235	C73235
	31		.1200	2.750		1.625		C72131	C71131	C73131
		3.10	.1220		65.00		36.00	C72236	C71236	—
1/8			.1250	2.750		1.625		C72008	C71008	C73008
		3.20	.1260		66.00		37.00	C72237	C71237	C73237
	30		.1285	2.750		1.625		C72130	C71130	C73130
		3.30	.1299		67.00		38.00	C72238	C71238	C73238
		3.40	.1339		70.00		39.00	C72239	C71239	—
	29		.1360	2.875		1.750		C72129	C71129	C73129
		3.50	.1378		70.00		39.00	C72240	C71240	C73240
	28		.1405	2.875		1.750		C72128	C71128	C73128
9/64			.1406	2.875		1.750		C72009	C71009	C73009
		3.60	.1417		70.00		39.00	C72241	C71241	C73241
	27		.1440	3.000		1.875		C72127	C71127	C73127
		3.70	.1457		70.00		39.00	C72242	C71242	—
	26		.1470	3.000		1.875		C72126	C71126	C73126
	25		.1495	3.000		1.875		C72125	C71125	C73125
		3.80	.1496		75.00		43.00	C72243	C71243	—
	24		.1520	3.125		2.000		C72124	C71124	C73124
		3.90	.1535		75.00		43.00	C72244	C71244	—
	23		.1540	3.125		2.000		C72123	C71123	C73123
5/32			.1562	3.125		2.000		C72010	C71010	C73010
	22		.1570	3.125		2.000		C72122	C71122	C73122
		4.00	.1575		75.00		43.00	C72245	C71245	C73245
	21		.1590	3.250		2.125		C72121	C71121	C73121
	20		.1610	3.250		2.125		C72120	C71120	C73120
		4.10	.1614		75.00		43.00	C72246	C71246	C73246
		4.20	.1654		75.00		43.00	C72247	C71247	C73247
	19		.1660	3.250		2.125		C72119	C71119	C73119
		4.30	.1692		80.00		47.00	C72248	C71248	C73248
	18		.1695	3.250		2.125		C72118	C71118	C73118
11/64			.1719	3.250		2.125		C72011	C71011	C73011

continued on next page



drill diameter			decimal equivalent	overall length		flute length		2002 bright	order number	
fraction	d ₁ wire/letter	mm		l ₁		l ₂			2001 black oxide	2002-TC TiCN
	17		.1730	3.375		2.188		C72117	C71117	C73117
		4.40	.1732		80.00		47.00	C72249	C71249	—
	16		.1770	3.375		2.188		C72116	C71116	C73116
		4.50	.1772		80.00		47.00	C72250	C71250	C73250
	15		.1800	3.375		2.188		C72115	C71115	C73115
		4.60	.1811			1.850	47.00	C72251	C71251	—
	14		.1820	3.375		2.188		C72114	C71114	C73114
	13		.1850	3.500		2.313		C72113	C71113	C73113
		4.70	.1850		80.00		47.00	C72252	C71252	—
3/16			.1875	3.500		2.313		C72012	C71012	C73012
	12		.1890	3.500		2.313		C72112	C71112	C73112
		4.80	.1890		86.00		52.00	C72253	C71253	C73253
	11		.1910	3.500		2.313		C72111	C71111	C73111
		4.90	.1929		86.00		52.00	C72254	C71254	C73254
	10		.1935	3.625		2.438		C72110	C71110	C73110
	9		.1960	3.625		2.438		C72109	C71109	C73109
		5.00	.1969		86.00		52.00	C72255	C71255	C73255
	8		.1990	3.625		2.438		C72108	C71108	C73108
		5.10	.2008		86.00		52.00	C72256	C71256	C73256
	7		.2010	3.625		2.438		C72107	C71107	C73107
13/64			.2031	3.625		2.438		C72013	C71013	C73013
	6		.2040	3.750		2.500		C72106	C71106	C73106
		5.20	.2047		86.00		52.00	C72257	C71257	C73257
	5		.2055	3.750		2.500		C72105	C71105	C73105
		5.30	.2087		95.00		64.00	—	C01181	—
	4		.2090	3.750		2.500		C72104	C71104	C73104
		5.40	.2125		93.00		57.00	C72259	C71259	—
	3		.2130	3.750		2.500		C72103	C71103	C73103
		5.50	.2165		93.00		57.00	C72260	C71260	C73260
7/32			.2188	3.750		2.500		C72014	C71014	C73014
		5.60	.2205		93.00		57.00	C72261	C71261	—
	2		.2210	3.875		2.625		C72102	C71102	C73102
		5.70	.2244		93.00		57.00	C72262	C71262	—
	1		.2280	3.875		2.625		C72101	C71101	C73101
		5.80	.2283		98.00		67.00	—	C01192	—
		5.90	.2322		93.00		57.00	C72264	C71264	—
	A		.2340	3.875		2.625		C72071	C71071	C73071
15/64			.2344	3.875		2.625		C72015	C71015	C73015
		6.00	.2362		93.00		57.00	C72265	C71265	C73265
	B		.2380	4.000		2.750		C72072	C71072	C73072
		6.10	.2401		101.00		63.00	C72266	C71266	—
	C		.2420	4.000		2.750		C72073	C71073	C73073
		6.20	.2440		101.00		63.00	C72267	C71267	—
	D		.2460	4.000		2.750		C72074	C71074	C73074
		6.30	.2480		101.00		63.00	C72268	C71268	—
1/4	E		.2500	4.000		2.750		C72016	C71016	C73016
		6.40	.2520		101.00		63.00	C72269	C71269	—
		6.50	.2559		101.00		63.00	C72270	C71270	C73270
	F		.2570	4.125		2.875		C72076	C71076	C73075

continued on next page

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series						
	Bright									★			
	Black Oxide	★				★		★					
	TiCN	★		★		★		★		★			

★ = Best Performance ◆ = Acceptable



General Purpose

Styles: 2002, 2001, 2002-TC (continued)



Jobber Length

High Speed Steel

drill diameter			decimal equivalent	overall length		flute length		2002 bright	order number		
fraction	d ₁ wire/letter	mm		l ₁		l ₂			2001 black oxide	2002-TC TiCN	
17/64	G	6.60	.2598		101.00		63.00	C72271	C71271	—	
			.2610	4.125		2.875		C72077	C71077	C73076	
		6.70	.2638		101.00		63.00	C72272	C71272	—	
	H		.2656	4.125		2.875		C72017	C71017	C73017	
			.2660	4.125		2.875		C72078	C71078	C73077	
		6.80	.2677		109.00		69.00	C72273	C71273	C73273	
9/32	I	6.90	.2717		109.00		69.00	C72274	C71274	—	
			.2720	4.125		2.875		C72079	C71079	C73078	
		7.00	.2756		109.00		69.00	C72275	C71275	C73275	
	J		.2770	4.125		2.875		C72080	C71080	C73079	
		7.10	.2795		109.00		69.00	C72276	C71276	—	
			.2812	4.250		2.938		C72018	C71018	C73018	
19/64	K		.2812	4.250		2.938		C72081	C71081	C73080	
		7.20	.2835		109.00		69.00	C72277	C71277	—	
		7.30	.2874		109.00		69.00	C72278	C71278	—	
	L		.2900	4.250		2.938		C72082	C71082	C73081	
		7.40	.2913		109.00		69.00	C72279	C71279	—	
			.2950	4.375		3.063		C72083	C71083	C73082	
5/16	M	7.50	.2953		109.00		69.00	C72280	C71280	C73280	
			.2969	4.375		3.063		C72019	C71019	C73019	
			.3020	4.375		3.063		C72084	C71084	C73083	
	N	7.70	.3031		117.00		75.00	C72282	C71282	—	
		7.80	.3070		117.00		75.00	C72283	C71283	—	
		7.90	.3110		117.00		75.00	C72284	C71284	—	
21/64	O		.3125	4.500		3.188		C72020	C71020	C73020	
		8.00	.3150		117.00		75.00	C72285	C71285	C73285	
			.3160	4.500		3.188		C72085	C71085	C73084	
	P	8.10	.3189		117.00		75.00	C72286	C71286	—	
		8.20	.3228		117.00		75.00	C72287	C71287	—	
			.3230	4.625		3.313		C72086	C71086	C73085	
11/32	Q		.3281	4.625		3.313		C72021	C71021	C73021	
		8.40	.3307		117.00		75.00	C72289	C71289	—	
			.3320	4.750		3.438		C72087	C71087	C73086	
	R	8.50	.3346		117.00		75.00	C72290	C71290	C73290	
			.3390	4.750		3.438		C72088	C71088	C73087	
		8.70	.3425		125.00		81.00	C72292	C71292	—	
23/64	S		.3438	4.750		3.438		C72022	C71022	C73022	
		8.80	.3464		125.00		3.189		C72293	C71293	—
			.3480	4.875		3.500		C72089	C71089	C73088	
	T	9.00	.3543		125.00		81.00	C72295	C71295	C73295	
			.3580	4.875		3.500		C72090	C71090	C73089	
			.3594	4.875		3.500		C72023	C71023	C73023	
3/8	U	9.20	.3622		125.00		81.00	C72297	C71297	—	
		9.30	.3661		125.00		81.00	C72298	C71298	—	
			.3680	5.000		3.625		C72091	C71091	C73090	
	V	9.40	.3700		125.00		81.00	C72299	C71299	—	
		9.50	.3740		125.00		81.00	C72300	C71300	C73300	
			.3750	5.000		3.625		C72024	C71024	C73024	
25/64	W		.3770	5.000		3.625		C72092	C71092	C73091	
		9.60	.3779		133.00		87.00	C72301	C71301	—	
		9.70	.3817		133.00		87.00	C72302	C71302	—	
	X		.3858		133.00		87.00	C72303	C71303	—	
			.3860	5.125		3.750		C72093	C71093	C73092	
			.3906	5.125		3.750		C72025	C71025	C73025	
13/32	Y	10.00	.3937		133.00		87.00	C72305	C71305	C73305	
			.3970		130.18		95.25	C72094	C71094	C73093	
		10.20	.4016		133.00		87.00	C72306	C71306	C73306	
	Z		.4040	5.250		3.875		C72095	C71095	C73094	
			.4062	5.250		3.875		C72026	C71026	C73026	

continued on next page



drill diameter			decimal equivalent	overall length		flute length		2002 bright	order number	
fraction	d ₁ wire/letter	mm		l ₁		l ₂			2001 black oxide	2002-TC TiCN
				in	mm	in	mm			
	Z		.4130	5.250		3.875		C72096	C71096	C73095
		10.50	.4134		133.00		87.00	C72308	C71308	C73308
27/64			.4219	5.375		3.938		C72027	C71027	C73027
		10.80	.4252		142.00		94.00	C72309	C71309	—
		11.00	.4331		142.00		94.00	C72310	C71310	C73310
7/16			.4375	5.500		4.063		C72028	C71028	C73028
		11.20	.4409		142.00		94.00	C72311	C71311	—
		11.50	.4527		142.00		94.00	C72312	C71312	C73312
29/64			.4531	5.625		4.188		C72029	C71029	C73029
15/32			.4688	5.750		4.313		C72030	C71030	C73030
		12.00	.4724		151.00		101.00	C72314	C71314	C73314
		12.20	.4803		151.00		101.00	C72315	C71315	—
31/64			.4844	5.875		4.375		C72031	C71031	C73031
		12.50	.4921		151.00		101.00	C72316	C71316	C73316
1/2			.5000	6.000		4.500		C72032	C71032	C73032
		13.00	.5118		151.00		101.00	C72319	C71319	C73319
33/64			.5156	6.625		4.813		—	C71033	—
17/32			.5312	6.625		4.813		—	C71034	—
		13.50	.5315		160.00		108.00	C72321	C71321	—
35/64			.5469	6.625		4.813		—	C71035	—
		14.00	.5512		160.00		108.00	C72323	C71323	C73323
9/16			.5625	6.625		4.813		—	C71036	—
		14.50	.5709		169.00		114.00	C72325	C71325	—
37/64			.5781	6.625		4.813		—	C71037	—
		15.00	.5906		169.00		114.00	C72327	C71327	C73327
19/32			.5938	7.125		5.188		—	C71038	—
39/64			.6094	7.125		5.188		—	C71039	—
		15.50	.6102		178.00		120.00	C72329	C71329	—
5/8			.6250	7.125		5.188		—	C71040	—
		16.00	.6299		178.00		120.00	C72331	C71331	C73331
41/64			.6406	7.125		5.188		—	C71041	—
		16.50	.6496		184.00		120.00	C72333	C71333	—
21/32			.6562	7.125		5.188		—	C71042	—
		17.00	.6693		184.00		120.00	C72335	C71335	C73335
43/64			.6719	7.625		5.625		—	C71043	—
11/16			.6875	7.625		5.625		—	C71044	—
		17.50	.6890		191.00		130.00	C72337	C71337	—

Jobber Length

High Speed Steel

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				
	Bright												
	Black Oxide	★				★		★		★			
	TiCN	★		★		★		★		★			

★ = Best Performance ◆ = Acceptable



Jobber Length

High Speed Steel

no. of pieces	size range	order number	
		2002 bright	2001 black oxide
15	1/16" through 1/2" x 1/32"	C72199	—
20	#61-#80	C00937	—
29	1/16" through 1/2" x 1/64"	C72198	C72197
26	letter A through Z	C00939	—
60	wire gauge #1 through #60	C00934	—
115	1/16" through 1/2", letter A through Z, and wire gage #1 through #60	C01330	—
25	1 mm through 13 mm x 0.5 mm	C72000	C71000
50	1 mm through 5.9 mm x 0.1 mm	—	C00960



115-Piece Set
#C01330



50-Piece Set
#C00690



60-Piece Set
#C00934



25-Piece Set
#C71000



BRIGHT VERSUS SURFACE TREATED TOOLS

- Bright (untreated) series are used in non-ferrous materials.
- Black oxide drills provide better wear life in ferrous materials.



- ♦ Operating parameters:
See Technical section


ASME
B94.11M

HSS

118°

Helix
LOW
10° to 20°Straight
ShankSurface
Treatment

Bright

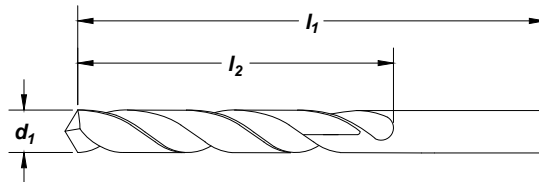

Jobber Length

High Speed Steel

Feature:

Slower helix aids chip removal in horizontal application.

drill diameter		overall length		order number 2020 bright
d ₁ fraction	decimal equivalent	l ₁ (in)	l ₂ (in)	
1/16	.0625	1.875	.875	C03477
5/64	.0781	2.000	1.000	C03491
3/32	.0938	2.250	1.250	C03506
7/64	.1094	2.625	1.500	C03519
1/8	.1250	2.750	1.625	C03529
9/64	.1406	2.875	1.750	C03538
5/32	.1562	3.125	2.000	C03549
11/64	.1719	3.250	2.125	C03560
3/16	.1875	3.500	2.313	C03571
13/64	.2031	3.625	2.438	C03582
7/32	.2188	3.750	2.500	C03592
15/64	.2344	3.875	2.625	C03601
1/4	.2500	4.000	2.750	C03610
17/64	.2656	4.125	2.875	C03618
9/32	.2812	4.250	2.938	C03632
19/64	.2969	4.375	3.063	C03636
5/16	.3125	4.500	3.188	C03643
21/64	.3281	4.625	3.313	C03651
11/32	.3438	4.750	3.438	C03658
3/8	.3750	5.000	3.625	C03673
25/64	.3906	5.125	3.750	C03681
13/32	.4062	5.250	3.875	C03686
27/64	.4219	5.375	3.938	C03689
7/16	.4375	5.500	4.063	C03692
29/64	.4531	5.625	4.188	C03695
15/32	.4688	5.750	4.313	C03697
1/2	.5000	6.000	4.500	C03702

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32	☆			>45
Bright	♦			♦				♦		☆			

☆ = Best Performance ♦ = Acceptable



♦ Operating parameters:
See Technical section

ASME
B94.11M

HSS

118°

Helix
High
35° to 45°


Straight
Shank

Surface
Treatment

Bright

Jobber Length

High Speed Steel

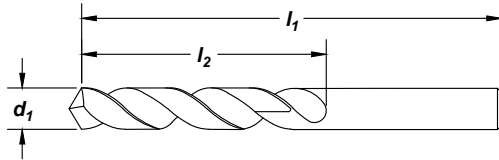

Feature:

Higher helix for improved chip lifting in softer materials.

drill diameter			overall	flute	order no. 2012
d ₁	decimal	length	length		
fraction	wire	equiv.	l ₁ (in)	l ₂ (in)	bright
80		.0135	.750	.188	C02881
79		.0145	.750	.188	C02883
78		.0160	.875	.188	C02887
77		.0180	.875	.188	C02890
76		.0200	.875	.188	C02893
75		.0210	1.000	.250	C02894
74		.0225	1.000	.250	C02896
73		.0240	1.125	.313	C02898
72		.0250	1.125	.313	C02899
71		.0260	1.250	.375	C02901
70		.0280	1.250	.375	C02903
69		.0292	1.375	.500	C02904
68		.0310	1.375	.500	C02906
1/32		.0312	1.375	.500	C02907
67		.0320	1.375	.500	C02909
66		.0330	1.375	.500	C02910
65		.0350	1.500	.625	C02912
64		.0360	1.500	.625	C02914
63		.0370	1.500	.625	C02915
62		.0380	1.500	.625	C02917
61		.0390	1.625	.688	C02918
60		.0400	1.625	.688	C02920
59		.0410	1.625	.688	C02921
58		.0420	1.625	.688	C02923
57		.0430	1.750	.750	C02924
56		.0465	1.750	.750	C02927
3/64		.0469	1.750	.750	C02928
55		.0520	1.875	.875	C02932
54		.0550	1.875	.875	C02934
53		.0595	1.875	.875	C02938
1/16		.0625	1.875	.875	C02940
52		.0635	1.875	.875	C02942
51		.0670	2.000	1.000	C02945

drill diameter			overall	flute	order no. 2012
d ₁	decimal	length	length		
fraction	wire	equiv.	l ₁ (in)	l ₂ (in)	bright
50		.0700	2.000	1.000	C02947
49		.0730	2.000	1.000	C02950
48		.0760	2.000	1.000	C02952
5/64		.0781	2.000	1.000	C02954
47		.0785	2.000	1.000	C02955
46		.0810	2.125	1.125	C02958
45		.0820	2.125	1.125	C02959
44		.0860	2.125	1.125	C02962
43		.0890	2.250	1.250	C02965
42		.0935	2.250	1.250	C02968
3/32		.0938	2.250	1.250	C02969
41		.0960	2.375	1.375	C02971
40		.0980	2.375	1.375	C02973
39		.0995	2.375	1.375	C02975
38		.1015	2.500	1.438	C02976
37		.1040	2.500	1.438	C02978
36		.1065	2.500	1.438	C02980
7/64		.1094	2.625	1.500	C02982
35		.1100	2.625	1.500	C02983
34		.1110	2.625	1.500	C02985
33		.1130	2.625	1.500	C02986
32		.1160	2.750	1.625	C02988
31		.1200	2.750	1.625	C02990
1/8		.1250	2.750	1.625	C02992
30		.1285	2.750	1.625	C02995
29		.1360	2.875	1.750	C02998
28		.1405	2.875	1.750	C03000
9/64		.1406	2.875	1.750	C03001
27		.1440	3.000	1.875	C03003
26		.1470	3.000	1.875	C03005
25		.1495	3.000	1.875	C03007
24		.1520	3.125	2.000	C03009
23		.1540	3.125	2.000	C03011

continued on next page



drill diameter		decimal equiv.	overall length l ₁ (in)	flute length l ₂ (in)	order no. 2012 bright
d ₁					
fraction	wire				
5/32		.1562	3.125	2.000	C03012
	22	.1570	3.125	2.000	C03013
	21	.1590	3.250	2.125	C03015
	20	.1610	3.250	2.125	C03016
	19	.1660	3.250	2.125	C03019
	18	.1695	3.250	2.125	C03022
11/64		.1719	3.250	2.125	C03023
	17	.1730	3.375	2.188	C03024
	16	.1770	3.375	2.188	C03026
	15	.1800	3.375	2.188	C03028
	14	.1820	3.375	2.188	C03030
	13	.1850	3.500	2.313	C03031
3/16		.1875	3.500	2.313	C03034
	12	.1890	3.500	2.313	C03035
	11	.1910	3.500	2.313	C03037
	10	.1935	3.625	2.438	C03039
	9	.1960	3.625	2.438	C03040
	8	.1990	3.625	2.438	C03042
	7	.2010	3.625	2.438	C03044
13/64		.2031	3.625	2.438	C03045
	6	.2040	3.750	2.500	C03046
	5	.2055	3.750	2.500	C03048
	4	.2090	3.750	2.500	C03051
	3	.2130	3.750	2.500	C03053
7/32		.2188	3.750	2.500	C03055
	2	.2210	3.875	2.625	C03057
	1	.2280	3.875	2.625	C03060
	A	.2340	3.875	2.625	C03063
15/64		.2344	3.875	2.625	C03064
	B	.2380	4.000	2.750	C03066
	C	.2420	4.000	2.750	C03068
	D	.2460	4.000	2.750	C03070
1/4		.2500	4.000	2.750	C03073
	F	.2570	4.125	2.875	C03077
	G	.2610	4.125	2.875	C03079

drill diameter		decimal equiv.	overall length l ₁ (in)	flute length l ₂ (in)	order no. 2012 bright
d ₁					
fraction	wire				
17/64		.2656	4.125	2.875	C03081
	H	.2660	4.125	2.875	C03083
	I	.2720	4.125	2.875	C03086
	J	.2770	4.125	2.875	C03088
	L	.2900	4.250	2.938	C03094
9/32		.2812	4.250	2.938	C03095
	M	.2950	4.375	3.063	C03097
19/64		.2969	4.375	3.063	C03099
	N	.3020	4.375	3.063	C03101
5/16		.3125	4.500	3.188	C03106
	O	.3160	5.750	3.188	C03108
	P	.3230	4.625	3.313	C03111
21/64		.3281	4.625	3.313	C03114
	Q	.3320	4.750	3.438	C03116
	R	.3390	4.750	3.438	C03119
11/32		.3438	4.750	3.438	C03121
	S	.3480	4.875	3.500	C03124
	T	.3580	4.875	3.500	C03127
23/64		.3594	4.875	3.500	C03129
	U	.3680	5.000	3.625	C03133
3/8		.3750	5.000	3.625	C03136
	V	.3770	5.000	3.625	C03137
	W	.3860	5.125	3.750	C03142
25/64		.3906	5.125	3.750	C03144
	X	.3970	5.125	3.750	C03146
	Y	.4040	5.250	3.875	C03148
13/32		.4062	5.250	3.875	C03149
	Z	.4130	5.250	3.875	C03150
27/64		.4219	5.375	3.938	C03152
7/16		.4375	5.500	4.063	C03155
29/64		.4531	5.625	4.188	C03158
15/32		.4688	5.750	4.313	C03160
31/64		.4844	5.875	4.375	C03163
1/2		.5000	6.000	4.500	C03165

Jobber Length

High Speed Steel

Material Reference	Steel (HRC)				Stainless Steel		Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	PH	18-22	22-32		>45
	Bright	☆									☆	

☆ = Best Performance ◆ = Acceptable



Parabolic

Styles: 2065, 2065-TN



- ♦ Operating parameters:
See Technical section
- ♦ Adjust the parameters as follows:
double the given feed rate.

ASME
B94.11M

HSS

135° Split


Helix
High
35° to 45°Straight
ShankSurface
Treatment

Bright

TiN

Jobber Length

High Speed Steel

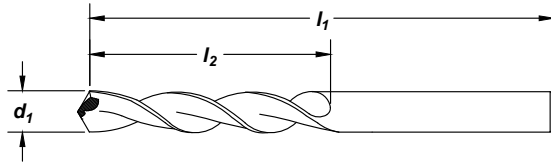**Feature:**

Excels in deep hole drilling without pecking in softer, free machining materials. Drill up to 10x diameter without pecking.

drill diameter					order number	
d ₁			overall length	flute length	2065	2065-TN
fraction	wire	decimal equivalent	l ₁ (in)	l ₂ (in)	Bright	TiN
1/16		.0625	1.875	.875	C16029	C03705
	52	.0635	1.875	.875	C16219	—
	51	.0670	2.000	1.000	C16218	—
	50	.0700	2.000	1.000	C16217	C03708
	49	.0730	2.000	1.000	C16216	—
5/64	48	.0760	2.000	1.000	C16215	—
		.0781	2.000	1.000	C16030	C03711
	47	.0785	2.000	1.000	C16214	—
	46	.0810	2.125	1.125	C16213	—
	45	.0820	2.125	1.125	C16212	—
	44	.0860	2.125	1.125	C16211	—
	43	.0890	2.250	1.250	C16210	—
	42	.0935	2.250	1.250	C16209	—
3/32		.0938	2.250	1.250	C16031	C03718
	41	.0960	2.375	1.375	C16208	—
	40	.0980	2.375	1.375	C16207	C03720
	39	.0995	2.375	1.375	C16206	—
	38	.1015	2.500	1.438	C16205	C03722
	37	.1040	2.500	1.438	C16204	—
7/64	36	.1065	2.500	1.438	C16203	C03724
		.1094	2.625	1.500	C16032	C03725
	35	.1100	2.625	1.500	C16202	—
	34	.1110	2.625	1.500	C16201	—
	33	.1130	2.625	1.500	C16200	C03728
	32	.1160	2.750	1.625	C16199	—
	31	.1200	2.750	1.625	C16198	C03730
1/8		.1250	2.750	1.625	C16033	C03731
	30	.1285	2.750	1.625	C16197	C03732
	29	.1360	2.875	1.750	C16196	C03733
	28	.1405	2.875	1.750	C16195	—
9/64		.1406	2.875	1.750	C16034	—
	27	.1440	3.000	1.875	C16194	—
	26	.1470	3.000	1.875	C16193	—
	25	.1495	3.000	1.875	C16192	C03738
	24	.1520	3.125	2.000	C16191	—
	23	.1540	3.125	2.000	C16190	—
5/32		.1562	3.125	2.000	C16035	C03741
	22	.1570	3.125	2.000	C16189	C03742

continued on next page



drill diameter			decimal equivalent	overall length l ₁ (in)	flute length l ₂ (in)	order number	
fraction	d ₁	wire				2065 Bright	2065-TN TiN
		21	.1590	3.500	2.313	C16188	C03743
		20	.1610	3.250	2.125	C16187	—
		19	.1695	3.250	2.125	C16186	C03745
		18	.1695	3.250	2.125	C16185	—
11/64			.1719	3.250	2.125	C16036	C03747
		17	.1730	3.375	2.188	C16184	—
		16	.1770	3.375	2.188	C16183	—
		15	.1800	3.375	2.188	C16182	C03750
		14	.1820	3.375	2.188	C16181	C03751
		13	.1850	3.500	2.313	C16180	C03752
3/16			.1875	3.500	2.313	C16037	C03753
		12	.1890	3.500	2.313	C16179	—
		11	.1910	3.500	2.313	C16178	—
		10	.1935	3.625	2.438	C16177	C03756
		9	.1960	3.625	2.438	C16176	—
		8	.1990	3.625	2.438	C16175	C03758
		7	.2010	3.625	2.438	C16174	—
13/64			.2031	3.625	2.438	C16038	C03760
		6	.2040	3.750	2.500	C16173	C03761
		5	.2055	3.750	2.500	C16172	C03762
		4	.2090	3.750	2.500	C16171	—
		3	.2130	3.750	2.500	C16170	C03764
7/32			.2188	3.750	2.500	C16039	C03765
		2	.2210	3.875	2.625	C16169	—
		1	.2280	3.875	2.625	C16168	—
15/64			.2344	3.875	2.625	C16040	—
1/4	E		.2500	4.000	2.750	C16041	C03773
17/64			.2656	4.125	2.875	C16042	C03776
9/32			.2812	4.250	2.938	C16043	C03781
19/64			.2969	4.375	3.063	C16044	C03784
5/16			.3125	4.500	3.188	C16045	C03786
21/64			.3281	4.625	3.313	C16046	—
11/32			.3438	4.750	3.438	C16047	—
23/64			.3594	4.875	3.500	C16048	—
3/8			.3750	5.000	3.625	C16049	—
25/64			.3906	5.125	3.750	C16050	—
13/32			.4062	5.250	3.875	C16051	C03801
27/64			.4219	5.375	3.938	C16052	—
7/16			.4375	5.500	4.063	C16053	C03804
29/64			.4531	5.625	4.188	C16054	—
15/32			.4688	5.750	4.313	C16055	C03806
31/64			.4844	5.875	4.375	C16056	C03807
1/2			.5000	6.000	4.500	C16057	—

Jobber Length

High Speed Steel

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				>45
	Bright	★		★		★				★			
	TiN	★		★		★							

★ = Best Performance ◆ = Acceptable



HOLEMAKING

Go To: [TABLE OF CONTENTS](#) All Products: www.gfii.com/literature/cleveland

Wide Land Parabolic - Q-Cobalt™

Styles: 2075, 2075-TN, 2075-TC, 2075-TA



♦ Operating parameters:
See Technical section

ASME
B94.11M

DIN
338

M42
Cobalt

135° Split

Helix
High
35° to 45°

Straight
Shank


Surface
Treatment

Straw
Oxide

TiN

TiCN

TiAlN

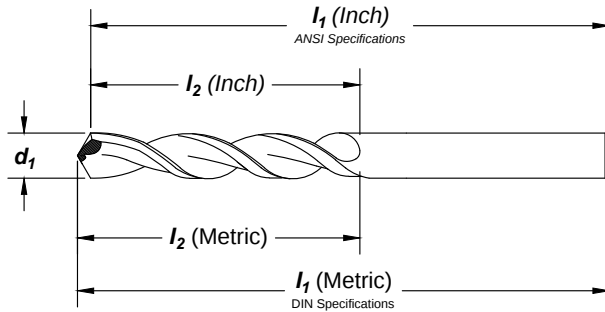

Feature:

Effective deep hole drilling in a wide array of materials. Available coating for extended tool life and productivity. Up to 7x diameter drilling without pecking.

drill diameter				overall length		flute length		order number			
fraction	wire/let	d ₁ mm	decimal equivalent	I ₁		I ₂		2075	2075-TN	2075-TC	2075-TA
				in	mm	in	mm	straw oxide	TiN	TiCN	TiAlN
1/16	*1.50	.0591	40.00	1.875	0.875	0.875	18.00	C16584	C16696	—	C11360
								C16555	C16667	C16942	C16972
	1.60	.0630	43.00	2.000	1.000	1.000	20.00	C15541	C13029	—	C11361
								C16554	C16666	C13175	C11452
								C16553	C16665	C13099	C11451
5/64	2.00	.0635	1.875	2.000	1.000	1.000	20.00	C16552	C16664	C13098	C11450
		.0670	2.000	2.000	1.000	1.000	20.00	C16551	C16663	C13097	C11449
		.0700	2.000	2.000	1.000	1.000	20.00	C16550	C16661	C13096	C11448
		.0730	2.000	2.000	1.000	1.000	20.00	C16556	C16668	C16943	C16973
		.0760	2.000	2.000	1.000	1.000	20.00	C16549	C16660	C13095	C11447
3/32	2.50	.0785	2.000	2.125	1.125	1.125	24.00	C16585	C16697	—	C11362
		.0810	2.125	2.125	1.125	1.125	24.00	C16548	C16659	C13094	C11446
		.0820	2.125	2.125	1.125	1.125	24.00	C16547	C16658	C13093	C11445
		.0860	2.125	2.125	1.125	1.125	24.00	C16546	C16657	C13091	C11444
		.0890	2.250	2.250	1.250	1.250	24.00	C16545	C16656	C16944	C16974
7/64	3.00	.0935	2.250	2.250	1.250	1.250	24.00	C16544	C16655	C13090	C11442
		.0938	2.250	2.250	1.250	1.250	24.00	C16557	C16669	C16945	C16975
		.0960	2.375	2.375	1.375	1.375	24.00	C16543	C16654	C16946	C16976
		.0980	2.375	2.375	1.375	1.375	24.00	C16542	C16652	C16947	C16977
		.0984	2.500	2.500	1.375	1.375	24.00	C16586	C16698	—	C11363
1/8	3.30	.0995	2.375	2.500	1.438	1.438	24.00	C16541	C16651	C16948	C16978
		.1015	2.500	2.500	1.438	1.438	24.00	C16540	C16650	C13089	C11438
		.1040	2.500	2.500	1.438	1.438	24.00	C16539	C16649	C13088	C11437
		.1065	2.500	2.500	1.438	1.438	24.00	C16538	C16648	C16949	C16979
		.1094	2.625	2.625	1.500	1.500	24.00	C16558	C16670	C16950	C16980
9/64	3.50	.1100	2.625	2.625	1.500	1.500	24.00	C16537	C16647	C13087	C11435
		.1110	2.625	2.625	1.500	1.500	24.00	C16536	C16646	C13086	C11434
		.1130	2.625	2.625	1.500	1.500	24.00	C16535	C16645	C13085	C11433
		.1142	2.750	2.750	1.625	1.625	24.00	C15556	C13030	—	C11365
		.1160	2.750	2.750	1.625	1.625	24.00	C16534	C16644	C13084	C11432
1/4	3.00	.1181	2.750	2.750	1.625	1.625	24.00	C16587	C16699	—	C11366
		.1200	2.750	2.750	1.625	1.625	24.00	C16533	C16643	C13083	C11431
		.1250	2.750	2.750	1.625	1.625	24.00	C16559	C16671	C16951	C16981
		.1285	2.750	2.750	1.625	1.625	24.00	C16532	C16642	C16952	C16982
		.1299	2.875	2.875	1.750	1.750	24.00	C15559	C13031	—	C11367
3/8	3.30	.1360	2.875	2.875	1.750	1.750	24.00	C16531	C16641	C16953	C16983
		.1378	3.000	3.000	1.875	1.875	24.00	C16588	C16700	—	C11368
		.1405	3.000	3.000	1.875	1.875	24.00	C16530	C16640	C13082	C11428
		.1406	3.000	3.000	1.875	1.875	24.00	C16560	C16672	C13042	C11400
		.1440	3.000	3.000	1.875	1.875	24.00	C16529	C16639	C13081	C11427
1/2	3.50	.1470	3.000	3.000	1.875	1.875	24.00	C16528	C16638	C13080	C11426
		.1495	3.000	3.000	1.875	1.875	24.00	C16527	C16637	C13079	C11425

*Not split point.

continued on next page



drill diameter			overall length		flute length		order number			
d ₁			l ₁		l ₂		2075	2075-TN	2075-TC	2075-TA
fraction	wire/let	mm	in	mm	in	mm	straw oxide	TiN	TiCN	TiAlN
	24		.1520	3.125	2.000		C16526	C16636	C13078	C11424
	23		.1540	3.125	2.000		C16525	C16635	C13076	C11423
5/32			.1562	3.125	2.000		C16561	C16673	C16954	C16984
	22		.1570	3.125	2.000		C16524	C16634	C13075	C11422
		4.00	.1575	75.00		43.00	C16589	C16701	—	C11370
	21		.1590	3.500	2.313		C16523	C16633	C16955	C16985
	20		.1610	3.250	2.125		C16522	C16632	C13074	C11420
		4.20	.1654	75.00		43.00	C15563	C13033	—	C11371
	19		.1660	3.250	2.125		C16521	C16631	C13073	C11419
	18		.1695	3.250	2.125		C16520	C16630	C13072	C11418
11/64			.1719	3.250	2.125		C16562	C16674	C13043	C11404
	17		.1730	3.375	2.188		C16519	C16629	C13071	C11417
	16		.1770	3.375	2.188		C16518	C16628	C13070	C11416
		4.50	.1772	80.00		47.00	C16590	C16702	—	C11373
	15		.1800	3.375	2.188		C16517	C16626	C13069	C11415
	14		.1820	3.375	2.188		C16516	C16625	C13067	C11414
	13		.1850	3.500	2.313		C16515	C16624	C13066	C11413
3/16			.1875	3.500	2.313		C16563	C16675	C16956	C16986
	12		.1890	3.500	2.313		C16514	C16623	C13065	C11412
	11		.1910	3.500	2.313		C16513	C16622	C13063	C11411
	10		.1935	3.625	2.438		C16512	C16621	C13062	C11410
	9		.1960	3.625	2.438		C16511	C16620	C13061	C11409
		5.00	.1969	86.00		52.00	C16591	C16703	—	C11374
	8		.1990	3.625	2.438		C16510	C16619	C13060	C11408
	7		.2010	3.625	2.438		C16509	C16618	C16957	C16987
13/64			.2031	3.625	2.438		C16564	C16676	C16958	C16988
	6		.2040	3.750	2.500		C16508	C16617	C16959	C16989
	5		.2055	3.750	2.500		C16507	C16616	C13059	C11405
	4		.2090	3.750	2.500		C16506	C16615	C16960	C16990
	3		.2130	3.750	2.500		C16505	C16614	C13058	C11403
		5.50	.2165	93.00		57.00	C16593	C16705	—	C11375
7/32			.2188	3.750	2.500		C16565	C16677	C16961	C16991
	2		.2210	3.875	2.625		C16504	C16613	C13057	C11402
	1		.2280	3.875	2.625		C16503	C16612	C13056	C11401
	A		.2340	3.875	2.625		C15650	—	C16430	—
15/64			.2344	3.875	2.625		C16566	C16678	C16962	C16992
		6.00	.2362	93.00		57.00	C16595	C16707	—	C11377
	B		.2380	4.000	2.750		C15651	—	C16431	—
	C		.2420	4.000	2.750		C15652	—	C16432	—
	D		.2460	4.000	2.750		C15653	—	C16433	—
1/4	E		.2500	4.000	2.750		C16567	C16679	C16963	C16993
		6.50	.2559	101.00		63.00	C16596	C16708	—	C11378
	F		.2570	4.125	2.875		C15654	—	C16434	—
	G		.2610	4.125	2.875		C15655	—	C16435	—
17/64			.2656	4.125	2.875		C16568	C16680	C16964	C16994
	H		.2660	4.125	2.875		C15656	—	C16436	—
		6.80	.2677	109.00		69.00	C16597	C16709	—	C11379
	I		.2720	4.125	2.875		C15657	—	C16437	—
		7.00	.2756	109.00		69.00	C16598	C16710	C16965	C16995
	J		.2770	4.125	2.875		C15658	—	C16438	—
	K		.2810	4.250	2.938		C15659	—	C16439	—
9/32			.2812	4.250	2.938		C16569	C16681	C16966	C16996

continued on next page

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	13-38	>38	16-38	> 38	300 Series	400 series		18-22	22-32				
	Hardness												
	TiN	★		★									
	TiCN	☆		☆	★	★		★	★	☆			
	TiAlN				☆	☆		☆	☆				

☆ = Best Performance ★ = Acceptable



Wide Land Parabolic - Q-Cobalt™

Styles: **2075, 2075-TN, 2075-TC, 2075-TA** (continued)

Jobber Length

Cobalt

drill diameter			decimal equivalent	overall length		flute length		order number			
fraction	d ₁ wire/let	mm		l ₁		l ₂		2075 straw oxide	2075-TN TiN	2075-TC TiCN	2075-TA TiAlN
	L		.2900	4.250		2.938		C15660	—	C16440	—
	M		.2950	4.375	111.13	3.063	77.79	C15661	—	C16441	—
19/64			.2969	4.375		3.063		C16570	C16682	C13044	C13205
	N		.3020	4.375		3.063		C15662	—	C16442	—
5/16			.3125	4.500		3.188		C16571	C16683	C16967	C16997
		8.00	.3150		117.00		75.00	C16600	C16712	—	C11381
	O		.3160	4.500		3.188		C15663	—	C16443	—
	P		.3230	4.625		3.313		C15664	—	C16444	—
21/64			.3281	4.625		3.313		C16572	C16684	C13045	C13206
	Q		.3320	4.750		3.438		C15665	—	C16445	—
	R		.3390	4.750		3.438		C15666	—	C16446	—
		8.70	.3425		125.00		81.00	C15573	C13035	—	C13215
11/32			.3438	4.750		3.438		C16573	C16685	C16968	C16998
	S		.3480	4.875		3.500		C15667	—	C16447	—
		9.00	.3543		125.00		81.00	C16604	C16716	—	C11383
	T		.3580	4.875		3.500		C15668	—	C16448	—
23/64			.3594	4.875		3.500		C16574	C16686	C13047	C13207
	U		.3680	5.000		3.625		C15669	—	C16449	—
3/8			.3750	5.000		3.625		C16575	C16687	C16969	C16999
	V		.3770	5.000		3.625		C15670	—	C16450	—
	W		.3860	5.125		3.750		C15671	—	C16451	—
25/64			.3906	5.125		3.750		C16576	C16688	C13048	C13208
		10.00	.3937		133.00		87.00	C16606	C16718	—	C11384
	X		.3970	5.125		3.750		C15672	—	C16452	—
		10.20	.4016		133.00		87.00	C15574	C13036	—	C13216
	Y		.4040	5.250		3.875		C15673	—	C16453	—
13/32			.4062	5.250		3.875		C16577	C16689	C13049	C13209
	Z		.4130	5.250		3.875		C15674	—	C16454	—
27/64			.4219	5.375		3.938		C16578	C16690	C13051	C13210
		10.80	.4252		142.00		94.00	C15575	C13037	—	C13217
		11.00	.4331		142.00		94.00	C16608	C16720	—	C11385
7/16			.4375	5.500		4.063		C16579	C16691	C16970	C17000
29/64			.4531	5.625		4.188		C16580	C16692	C13052	C13212
15/32			.4688	5.750		4.313		C16581	C16693	C13054	C13213
		12.00	.4724		151.00		101.00	C16610	C16722	—	C11386
		12.25	.4823		151.00		101.00	C15577	C13038	—	C13250
31/64			.4844	5.875		4.375		C16582	C16694	C13055	C13214
		12.50	.4921		151.00		101.00	C16611	C16723	—	C13251
1/2			.5000	6.000		4.500		C16583	C16695	C16971	C17001
		13.00	.5118		151.00		101.00	C15583	C13040	—	C11387

SET

Wide Land Parabolic - Q-Cobalt™

Style: **2075**

no. of pieces	surface treatment	size range	order number 2075
15	straw oxide	1/16" through 1/2" x 1/32"	C00901
29	straw oxide	1/16" through 1/2" x 1/64"	C00902

29-Piece Set
#C00902

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series						
		18-22	22-32										
TiN	★			★									
TiCN	★			★		★	★	★	★	★			
TiAlN						★	★	★	★				

★ = Best Performance

◆ = Acceptable



♦ Operating parameters:
See Technical section

ASME
B94.11M

HSS


118°

Helix
Regular
21° to 34°

Straight
Shank

Surface
Treatment

Bright

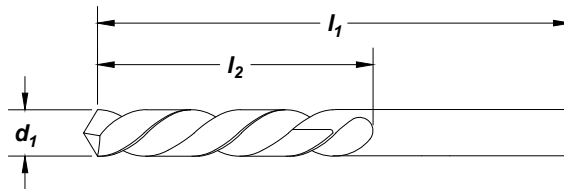

Jobber Length

High Speed Steel

Feature:

Left Hand for reverse spindle application.

drill diameter		overall length		order number 2006 bright
d_1 fraction	decimal equivalent	l_1 (in)	flute length l_2 (in)	
1/16	.0625	1.875	.875	C01401
5/64	.0781	2.000	1.000	C01415
3/32	.0938	2.250	1.250	C01430
7/64	.1094	2.625	1.500	C01443
1/8	.1250	2.750	1.625	C01453
9/64	.1406	2.875	1.750	C01462
5/32	.1562	3.125	2.000	C01473
11/64	.1719	3.250	2.125	C01484
3/16	.1875	3.500	2.313	C01495
13/64	.2031	3.875	2.438	C01506
7/32	.2188	3.750	2.500	C01516
1/4	.2500	4.000	2.750	C01532
17/64	.2656	4.125	2.875	C01538
9/32	.2812	4.250	2.938	C01551
5/16	.3125	4.500	3.188	C01561
3/8	.3750	5.000	3.625	C01588
13/32	.4062	5.250	3.875	C01600

Material Reference	Steel (HRC)				Stainless Steel		Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				>45
Hardness												
Bright	☆		☆				☆		☆			

☆ = Best Performance ♦ = Acceptable



HOLEMAKING


Go To: [TABLE OF CONTENTS](#) All Products: www.gfii.com/literature/cleveland

Aircraft NAS 907, Type A - General Purpose

Style: 2228



- ♦ Split point for reduced thrust and easy penetration.
- ♦ Operating parameters: See Technical section

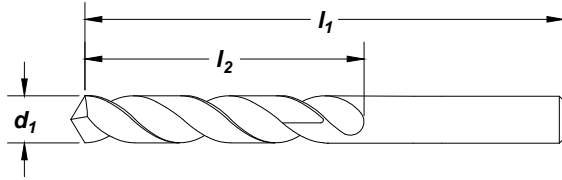

Jobber Length

High Speed Steel

drill diameter		decimal equivalent	overall length		flute length	order number 2228 bright
fraction	d ₁ (in) wire		l ₁ (in)	l ₂ (in)		
1/16		.0625	1.875	.875		C73400
	52	.0635	1.875	.875		C73480
	51	.0670	2.000	1.000		C73479
	50	.0700	2.000	1.000		C73478
	49	.0730	2.000	1.000		C73477
	48	.0760	2.000	1.000		C73476
5/64		.0781	2.000	1.000		C73401
	47	.0785	2.000	1.000		C73475
	46	.0810	2.125	1.125		C73474
	45	.0820	2.125	1.125		C73473
	44	.0860	2.125	1.125		C73472
	43	.0890	2.250	1.250		C73471
	42	.0935	2.250	1.250		C73470
		.0938	2.250	1.250		C73402
3/32	41	.0960	2.375	1.375		C73469
	40	.0980	2.375	1.375		C73468
	39	.0995	2.375	1.375		C73467
	38	.1015	2.500	1.438		C73466
	37	.1040	2.500	1.438		C73465
	36	.1065	2.500	1.438		C73464
		.1094	2.625	1.500		C73403
7/64	35	.1100	2.625	1.500		C73463
	34	.1110	2.625	1.500		C73462
	33	.1130	2.625	1.500		C73461
	32	.1160	2.750	1.625		C73460
	31	.1200	2.750	1.625		C73459
		.1250	2.750	1.625		C73404
1/8	30	.1285	2.750	1.625		C73458
	29	.1360	2.875	1.750		C73457
	28	.1405	2.875	1.750		C73456
		.1406	2.875	1.750		C73405
9/64	27	.1440	3.000	1.875		C73455
	26	.1470	3.000	1.875		C73454
	25	.1495	3.000	1.875		C73453
	24	.1520	3.125	2.000		C73452
	23	.1540	3.125	2.000		C73451
		.1562	3.125	2.000		C73406

continued on next page




drill diameter		decimal equivalent	overall length		flute length		order number 2228 bright
fraction	d ₁ (in)		l ₁ (in)		l ₂ (in)		
	22	.1570	3.125		2.000		C73450
	21	.1590	3.250		2.125		C73449
	20	.1610	3.250		2.125		C73448
	19	.1660	3.250		2.125		C73447
	18	.1695	3.250		2.125		C73446
11/64		.1719	3.250		2.125		C73407
	17	.1730	3.375		2.188		C73445
	16	.1770	3.375		2.188		C73444
	15	.1800	3.375		2.188		C73443
	14	.1820	3.375		2.188		C73442
	13	.1850	3.500		2.313		C73441
3/16		.1875	3.500		2.313		C73408
	12	.1890	3.500		2.313		C73440
	11	.1910	3.500		2.313		C73439
	10	.1935	3.625		2.438		C73438
	9	.1960	3.625		2.438		C73437
	8	.1990	3.625		2.438		C73436
	7	.2010	3.625		2.438		C73435
13/64		.2031	3.625		2.438		C73409
	6	.2040	3.750		2.500		C73434
	5	.2055	3.750		2.500		C73433
	4	.2090	3.750		2.500		C73432
	3	.2130	3.750		2.500		C73431
7/32		.2188	3.750		2.500		C73410
	2	.2210	3.875		2.625		C73430
	1	.2280	3.875		2.625		C73429
15/64		.2344	3.875		2.625		C73411
1/4		.2500	4.000		2.750		C73412
17/64		.2656	4.125		2.875		C73413
9/32		.2812	4.250		2.938		C73414
19/64		.2969	4.375		3.063		C73415
5/16		.3125	4.500		3.188		C73416
21/64		.3281	4.625		3.313		C73417
11/32		.3438	4.750		3.438		C73418
23/64		.3594	4.875		3.500		C73419
3/8		.3750	5.000		3.625		C73420
25/64		.3906	5.125		3.750		C73421
13/32		.4062	5.250		3.875		C73422
27/64		.4219	5.375		3.938		C73423
7/16		.4375	5.500		4.063		C73424
29/64		.4531	5.625		4.188		C73425
15/32		.4688	5.750		4.313		C73426
31/64		.4844	5.875		4.375		C73427
1/2		.5000	6.000		4.500		C73428

Jobber Length

High Speed Steel

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				>45
	Bright	☆		☆		◆				☆			

☆ = Best Performance ◆ = Acceptable

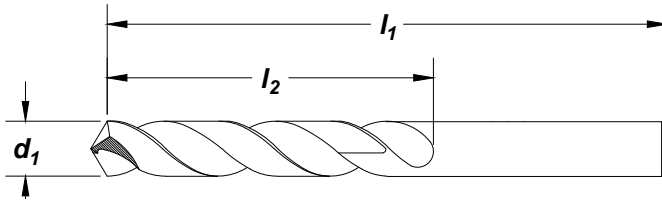**Aircraft NAS 907, Type B - Heavy Duty**
Style: 2222♦ Operating parameters:
See Technical section**HSS****NAS 907
TYPE B****135° Split****Helix
Regular****Straight
Shank****Surface
Treatment****Bright****Jobber Length****Feature:**

Heavy Duty design for tougher materials.

High Speed Steel

drill diameter			overall length		flute length		order number
d ₁			l ₁		l ₂		2222
fraction	wire/letter	mm	in	mm	in	mm	bright
* 3/64		1.00		34.00		12.00	C11800
			1.750		0.750		C11600
		1.50		40.00		18.00	C11805
1/16			1.875		0.875		C11601
	#52		1.875		0.875		C11706
	#51		2.000		1.000		C11705
	#50		2.000		1.000		C11704
	#49		2.000		1.000		C11703
	#48		2.000		1.000		C11702
5/64			2.000		1.000		C11602
	#47		2.000		1.000		C11701
		2.00		49.00		24.00	C11810
	#46		2.125		1.125		C11700
	#45		2.125		1.125		C11699
	#44		2.125		1.125		C11698
3/32	#43		2.250		1.250		C11697
	#42		2.250		1.250		C11696
			2.250		1.250		C11603
	#41		2.375		1.375		C11695
	#40		2.375		1.375		C11694
		2.50		57.00		30.00	C11815
7/64	#39		2.375		1.375		C11693
	#38		2.500		1.438		C11692
	#37		2.500		1.438		C11691
	#36		2.500		1.438		C11690
			2.625		1.500		C11604
	#35		2.625		1.500		C11689
9/64	#34		2.625		1.500		C11688
	#33		2.625		1.500		C11687
	#32		2.750		1.625		C11686
		3.00		61.00		33.00	C11820
	#31		2.750		1.625		C11685
			2.750		1.625		C11605
1/8		3.20		65.00		36.00	C11822
	#30		2.750		1.625		C11684
	#29		2.875		1.750		C11683
		3.50		70.00		39.00	C11825
	#28		2.875		1.750		C11682
			2.875		1.750		C11606
5/32	#27		3.000		1.875		C11681
	#26		3.000		1.875		C11680
	#25		3.000		1.875		C11679
	#24		3.125		2.000		C11678
	#23		3.125		2.000		C11677
			3.125		2.000		C11607

*Not split point.

continued on next page



drill diameter			decimal equivalent	overall length		flute length		order number 2222 bright
fraction	d ₁ wire/letter	mm		in	mm	in	mm	
11/64	#22	4.00	0.1570	3.125		2.000		C11676
			0.1575		75.00		43.00	C11830
	#21		0.1590	3.250		2.125		C11675
	#20		0.1610	3.250		2.125		C11674
		4.10	0.1614		75.00		43.00	C11831
	#19		0.1660	3.250		2.125		C11673
	#18		0.1695	3.250		2.125		C11672
			0.1719	3.250		2.125		C11608
3/16	#17		0.1730	3.375		2.188		C11671
	#16		0.1770	3.375		2.188		C11670
		4.50	0.1772		80.00		47.00	C11835
	#15		0.1800	3.375		2.188		C11669
	#14		0.1820	3.375		2.188		C11668
	#13		0.1850	3.500		2.313		C11667
			0.1875	3.500		2.313		C11609
	#12		0.1890	3.500		2.313		C11666
13/64	#11		0.1910	3.500		2.313		C11665
		4.90	0.1929		86.00		52.00	C11839
	#10		0.1935	3.625		2.438		C11664
	#9		0.1960	3.625		2.438		C11663
		5.00	0.1969		86.00		52.00	C11840
	#8		0.1990	3.625		2.438		C11662
	#7		0.2010	3.625		2.438		C11661
			0.2031	3.625		2.438		C11610
7/32	#6		0.2040	3.750		2.500		C11660
	#5		0.2055	3.750		2.500		C11659
	#4		0.2090	3.750		2.500		C11658
	#3		0.2130	3.750		2.500		C11657
		5.50	0.2165		93.00		57.00	C11845
			0.2188	3.750		2.500		C11611
	#2		0.2210	3.875		2.625		C11656
	#1		0.2280	3.875		2.625		C11655
15/64	A		0.2340	3.875		2.625		C11630
			0.2344	3.875		2.625		C11612
		6.00	0.2362		93.00		57.00	C11850
	B		0.2380	4.000		2.750		C11631
	C		0.2420	4.000		2.750		C11632
	D		0.2460	4.000		2.750		C11633
	E		0.2500	4.000		2.750		C11613
		6.50	0.2559		101.00		63.00	C11855
17/64	F		0.2570	4.125		2.875		C11634
	G		0.2610	4.125		2.875		C11635
			0.2656	4.125		2.875		C11614
	H		0.2660	4.125		2.875		C11636
	I		0.2720	4.125		2.875		C11637
		7.00	0.2756		109.00		69.00	C11860
	J		0.2770	4.125		2.875		C11638
	K		0.2810	4.250		2.938		C11639
9/32			0.2812	4.250		2.938		C11615
	L		0.2900	4.250		2.938		C11640
	M		0.2950	4.375		3.063		C11641

continued on next page

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				>45
	Bright	☆		☆		◆		◆	◆	☆			
☆ = Best Performance ◆ = Acceptable													

**Aircraft NAS 907, Type B - Heavy Duty**
Style: **2222** (continued)

Jobber Length

High Speed Steel

drill diameter			decimal equivalent	overall length		flute length		order number
fraction	d ₁ wire/letter	mm		in	mm	in	mm	2222 bright
19/64	N	7.50	0.2953		109.00		69.00	C11865
			0.2969	4.375		3.063		C11616
			0.3020	4.375		3.063		C11642
5/16	O		0.3125	4.500		3.188		C11617
		8.00	0.3150		117.00		75.00	C11870
			0.3160	4.500		3.188		C11643
21/64	P		0.3230	4.625		3.313		C11644
			0.3281	4.625		3.313		C11618
			0.3320	4.750		3.438		C11645
11/32	R	8.50	0.3346		117.00		75.00	C11875
			0.3390	4.750		3.438		C11646
			0.3438	4.750		3.438		C11619
23/64	S		0.3480	4.875		3.500		C11647
		9.00	0.3543		125.00		81.00	C11880
			0.3580	4.875		3.500		C11648
25/64	T		0.3594	4.875		3.500		C11620
			0.3680	5.000		3.625		C11649
		9.50	0.3740		125.00		81.00	C11885
3/8	V		0.3750	5.000		3.625		C11621
			0.3770	5.000		3.625		C11650
			0.3860	5.125		3.750		C11651
25/64	W		0.3906	5.125		3.750		C11622
		10.00	0.3937		133.00		87.00	C11890
			0.3970	5.125		3.750		C11652
13/32	X		0.4040	5.250		3.875		C11653
			0.4062	5.250		3.875		C11623
			0.4130	5.250		3.875		C11654
27/64	Y	10.50	0.4134		133.00		87.00	C11895
			0.4219	5.375		3.938		C11624
			0.4331		142.00		94.00	C11900
7/16	Z	11.00	0.4375	5.500		4.063		C11625
			0.4528		142.00		94.00	C11905
			0.4531	5.625		4.188		C11626
15/32			0.4688	5.750		4.313		C11627
		12.00	0.4724		151.00		101.00	C11910
			0.4844	5.875		4.375		C11628
31/64		12.50	0.4921		151.00		101.00	C11915
			0.5000	6.000		4.500		C11629
		13.00	0.5118		151.00		101.00	C11920

SET

Aircraft NAS 907, Type B - Heavy Duty
Style: **2222**

no. of pieces	drill style	surface treatment	size range	order number 2222
29	2222	bright	1/16" through 1/2" x 1/64"	C70371



Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				>45
	Bright	☆		☆		◆		◆	◆	☆			

☆ = Best Performance ◆ = Acceptable



♦ Operating parameters:
See Technical section

M42
Cobalt

NAS 907
TYPE J


135° Split

Helix
Regular
21° to 34°

Straight
Shank

Surface
Treatment

Straw
Oxide

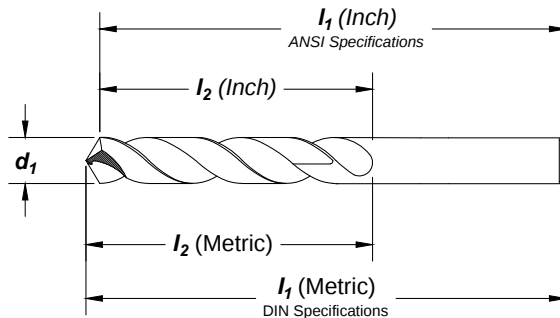**Feature:**

Highly heat resistant cobalt substrate for tough to machine materials.

drill diameter			overall length		flute length		order number
d ₁			I ₁		I ₂		2213
fraction	wire/letter	mm	decimal equivalent	in	mm	in	straw oxide
	*80		.0135	.750		.125	C70213
	*79		.0145	.750		.125	C70212
*1/64			.0156	.750		.188	C70000
	*78		.0160	.875		.188	C70211
	*77		.0180	.875		.188	C70210
	*76		.0200	.875		.188	C70209
	*75		.0210	1.000		.250	C70208
	*74		.0225	1.000		.250	C70207
	*73		.0240	1.125		.313	C70206
	*72		.0250	1.125		.313	C70205
	*71		.0260	1.250		.375	C70204
	*70		.0280	1.250		.375	C70203
	*69		.0292	1.375		.500	C70202
	*68		.0310	1.375		.500	C70201
*1/32			.0312	1.375		.500	C70001
	*67		.0320	1.375		.500	C70200
	*66		.0330	1.375		.500	C70199
	*65		.0350	1.500		.625	C70198
	*64		.0360	1.500		.625	C70197
	*63		.0370	1.500		.625	C70196
	*62		.0380	1.500		.625	C70195
	*61		.0390	1.625		.688	C70194
		*1.0	.0394	34.00		12.00	C70057
	*60		.0400	1.625		.688	C70193
	*59		.0410	1.625		.688	C70192
	*58		.0420	1.625		.688	C70191
	*57		.0430	1.750		.750	C70190
		*1.1	.0433	36.00		14.00	C70058
	*56		.0465	1.750		.750	C70189
*3/64			.0469	1.750		.750	C70002

*Not split point.

continued on next page

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				
	Straw	☆		☆		☆	☆	♦	♦	☆	♦	♦	
☆ = Best Performance ♦ = Acceptable													



Aircraft NAS 907, Type J - Cobalt Heavy Duty

Style: 2213 (continued)



Jobber Length

Cobalt

drill diameter			decimal equivalent	overall length		flute length		order number
fraction	wire/letter	mm		l ₁		l ₂		2213 straw oxide
		*1.2	.0472		38.00		16.00	C70059
		*1.3	.0512		38.00		16.00	C70060
	*55		.0520	1.875		.875		C70188
	*54		.0550	1.875		.875		C70187
		*1.4	.0551		40.00		18.00	C70061
		*1.5	.0591		40.00		18.00	C70062
1/16	*53		.0595	1.875		.875		C70186
			.0625	1.875		.875		C70003
		1.6	.0630		43.00		20.00	C70063
	52		.0635	1.875		.875		C70185
		1.7	.0669		43.00		20.00	C70064
	51		.0670	2.000		1.000		C70184
	50		.0700	2.000		1.000		C70183
		1.8	.0709		46.00		22.00	C70065
	49		.0730	2.000		1.000		C70182
		1.9	.0748		46.00		22.00	C70220
5/64	48		.0760	2.000		1.000		C70181
			.0781	2.000		1.000		C70004
	47		.0785	2.000		1.000		C70180
		2.0	.0787		49.00		24.00	C70067
	46		.0810	2.125		1.125		C70179
	45		.0820	2.125		1.125		C70178
		2.1	.0827		49.00		24.00	C70068
	44		.0860	2.125		1.125		C70177
		2.2	.0866		53.00		27.00	C70221
	43		.0890	2.250		1.250		C70176
		2.3	.0906		53.00		27.00	C70070
3/32	42		.0935	2.250		1.250		C70175
			.0938	2.250		1.250		C70005
		2.4	.0945		57.00		30.00	C70071
	41		.0960	2.375		1.375		C70174
	40		.0980	2.375		1.375		C70173
		2.5	.0984		57.00		30.00	C70072
	39		.0995	2.375		1.375		C70172
	38		.1015	2.500		1.438		C70171
		2.6	.1024		57.00		30.00	C70073
	37		.1040	2.500		1.438		C70170
		2.7	.1063		61.00		33.00	C70074
7/64	36		.1065	2.500		1.438		C70169
			.1094	2.625		1.500		C70006
	35		.1100	2.625		1.500		C70168
		2.8	.1102		61.00		33.00	C70222
	34		.1110	2.625		1.500		C70167
	33		.1130	2.625		1.500		C70166
		2.9	.1142		61.00		33.00	C70076
	32		.1160	2.750		1.625		C70165
		3.0	.1181		61.00		33.00	C70077
	31		.1200	2.750		1.625		C70164
1/8		3.1	.1220		65.00		36.00	C70078
	1/8		.1250	2.750		1.625		C70007
		3.2	.1260		65.00		36.00	C70079
	30		.1285	2.750		1.625		C70163
		3.3	.1299		65.00		36.00	C70080
		3.4	.1339		70.00		39.00	C70081
	29		.1360	2.875		1.750		C70162
		3.5	.1378		70.00		39.00	C70082

*Not split point.

continued on next page



drill diameter			decimal equivalent	overall length		flute length		order number 2213 straw oxide
fraction	wire/letter	mm		I_1 in	mm	I_2 in	mm	
9/64	28		.1405	2.875		1.750		C70161
			.1406	2.875		1.750		C70008
		3.6	.1417		70.00		39.00	C70083
	27		.1440	3.000		1.875		C70160
			.1457		70.00		39.00	C70223
		3.7	.1470	3.000		1.875		C70159
	25		.1495	3.000		1.875		C70158
			.1496		75.00		43.00	C70085
		3.8	.1520	3.125		2.000		C70157
	23		.1535		75.00		43.00	C70086
			.1540	3.125		2.000		C70156
			.1562	3.125		2.000		C70009
5/32	22		.1570	3.125		2.000		C70155
			.1575		75.00		43.00	C70087
		4.0	.1590	3.250		2.125		C70154
	20		.1610	3.250		2.125		C70153
			.1614		75.00		43.00	C70088
		4.1	.1654		75.00		43.00	C70089
	19		.1660	3.250		2.125		C70152
			.1693		80.00		47.00	C70090
		4.3	.1695	3.250		2.125		C70151
11/64	18		.1719		82.55		53.98	C70010
			.1730	3.375		2.188		C70150
		4.4	.1732		80.00		47.00	C70091
	16		.1770	3.375		2.188		C70149
			.1772		80.00		47.00	C70092
		4.5	.1800	3.375		2.188		C70148
	15		.1811		80.00		47.00	C70224
			.1820	3.375		2.188		C70147
		4.6	.1850	3.500		2.313		C70146
	13		.1850		80.00		47.00	C70094
			.1875	3.500		2.313		C70011
		4.7	.1890	3.500		2.313		C70145
3/16	12		.1890		86.00		52.00	C70095
			.1910	3.500		2.313		C70144
		4.8	.1929		86.00		52.00	C70096
	10		.1935	3.625		2.438		C70143
			.1960	3.625		2.438		C70142
		5.0	.1968		86.00		52.00	C70097
	8		.1990	3.625		2.438		C70141
			.2008		86.00		52.00	C70098
		5.1	.2010	3.625		2.438		C70140
13/64	7		.2031	3.625		2.438		C70012
			.2040	3.750		2.500		C70139
		5.2	.2047		86.00		52.00	C70099
	5		.2055	3.750		2.500		C70138
			.2087		86.00		52.00	C70100
		5.3	.2090	3.750		2.500		C70137

continued on next page

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				>45
Straw	☆			☆		☆	☆	◆	◆	☆	◆	◆	
☆ = Best Performance ◆ = Acceptable													



Aircraft NAS 907, Type J - Cobalt Heavy Duty

Style: 2213 (continued)



Jobber Length

Cobalt

drill diameter			decimal equivalent	overall length		flute length		order number
fraction	d ₁ wire/letter	mm		l ₁		l ₂		2213 straw oxide
				in	mm	in	mm	
7/32	3	5.4	.2126		93.00		57.00	C70101
			.2130	3.750		2.500		C70136
		5.5	.2165		93.00		57.00	C70102
7/32			.2188	3.750		2.500		C70013
		5.6	.2205		93.00		57.00	C70225
			.2210	3.875		2.625		C70135
1	2	5.7	.2244		93.00		57.00	C70104
			.2280	3.875		2.625		C70134
		5.8	.2283		93.00		57.00	C70226
15/64	A		.2340	3.875		2.625		C70032
			.2344	3.875		2.625		C70014
		6.0	.2362		93.00		57.00	C70106
	B		.2380	4.000		2.750		C70033
		6.1	.2402		101.00		63.00	C70107
			.2420	4.000		2.750		C70034
	C	6.2	.2441		101.00		63.00	C70108
			.2460	4.000		2.750		C70035
		6.3	.2480		101.00		63.00	C70109
1/4	E		.2500	4.000		2.750		C70015
			.2500	4.000		2.750		C70015
		6.4	.2520		101.00		63.00	C70110
	F	6.5	.2559		101.00		63.00	C70111
			.2570	4.125		2.875		C70036
		6.6	.2598		101.00		63.00	C70112
	G		.2610	4.125		2.875		C70037
		6.7	.2638		101.00		63.00	C70113
			.2656	4.125		2.875		C70016
17/64	H		.2660	4.125		2.875		C70038
		6.8	.2677		109.00		69.00	C70114
			.2720	4.125		2.875		C70039
	I	7.0	.2756		109.00		69.00	C70115
			.2770	4.125		2.875		C70040
		9/32	.2812	4.250		2.938		C70017
	K		.2812	4.250		2.938		C70041
		7.2	.2835		109.00		69.00	C70116
			.2900	4.250		2.938		C70042
	L		.2950	4.375		3.063		C70043
		7.5	.2953		109.00		69.00	C70117
			.2969	4.375		3.063		C70018
19/64	N		.3020	4.375		3.063		C70044
		7.8	.3071		117.00		75.00	C70118
			.3125	4.500		3.188		C70019
5/16		8.0	.3150		117.00		75.00	C70119
			.3160	4.500		3.188		C70045
		8.1	.3189		117.00		75.00	C70120
	P		.3230	4.625		3.313		C70046
		21/64	.3281	4.625		3.313		C70020
			.3320	4.750		3.438		C70047
	Q	8.5	.3346		117.00		75.00	C70122
			.3390	4.750		3.438		C70048
		11/32	.3438	4.750		3.438		C70021
	R		.3480	4.875		3.500		C70049
		9.0	.3543		125.00		81.00	C70124
			.3580	4.875		3.500		C70050
23/64	T		.3594	4.875		3.500		C70022
			.3680	5.000		3.625		C70051
		U						

continued on next page



drill diameter			overall length		flute length		order number
d₁			l₁		l₂		2213
fraction	wire/letter	mm	in	mm	in	mm	straw oxide
3/8		9.5		125.00		81.00	C70125
							C70023
	V						C70052
	W						C70053
25/64							C70024
							C70126
	X						C70054
							C70127
13/32							C70055
							C70025
							C70056
	Z						C70128
27/64							C70026
							C70129
							C70027
							C70130
15/32							C70028
							C70029
							C70131
							C70030
31/64							C70132
							C70031
							C70133

Jobber Length

Cobalt

Aircraft NAS 907, Type J - Cobalt Heavy Duty
Style: 2213

SET


 26-Piece Set
 #C00986

no. of pieces	surface treatment	size range	order number
29	straw oxide	1/16" through 1/2" x 1/64"	C70365
26	straw oxide	A through Z letter	C00986
60	straw oxide	#1 through #60 wire gauge	C70366
115	straw oxide	1/16" through 1/2" x 1/64", A through Z and #1 through #60	C70367


 115-Piece Set
 #C70367

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				>45
	Straw	☆		☆		☆	☆	◆	◆	☆	◆	◆	

☆ = Best Performance ◆ = Acceptable



Cotter Pin - Heavy Duty Style: 2011



♦ Operating parameters:
See Technical section

ASME
B94.11M

HSS


135° Split

Helix
Regular
21° to 34°

Straight
Shank

Surface
Treatment

Black
Oxide

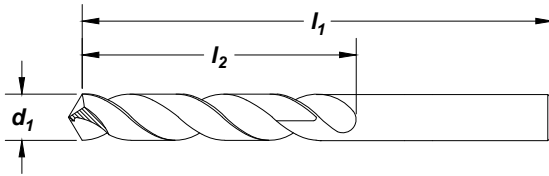

Feature:

Fast penetrating split point design. Constant parallel web for easy regrinds.

drill diameter				overall length		order number 2011 black oxide
fraction	d ₁ wire/letter	decimal equivalent		l ₁ (in)	l ₂ (in)	
	*80	.0135		.750	.125	C02593
	*54	.0550		1.875	.875	C02646
1/16		.0625		1.875	.875	C02652
	52	.0635		1.875	1.000	C02654
	50	.0700		2.000	1.000	C02659
5/64		.0781		2.000	1.000	C02666
	47	.0785		2.000	1.000	C02667
	45	.0820		2.125	1.125	C02671
3/32		.0938		2.250	1.250	C02681
	40	.0980		2.375	1.375	C02685
	37	.1040		2.500	1.438	C02690
7/64		.1094		2.625	1.500	C02694
	32	.1160		2.750	1.625	C02700
	31	.1200		2.750	1.625	C02702
1/8		.1250		2.750	1.625	C02704
	30	.1285		2.750	1.625	C02707
	29	.1360		2.875	1.750	C02710
9/64		.1406		2.875	1.750	C02713
	25	.1495		3.000	1.875	C02719
5/32		.1562		3.125	2.000	C02724
11/64		.1719		3.125	2.000	C02735
3/16		.1875		3.500	2.313	C02746
7/32		.2188		3.750	2.500	C02767
15/64		.2344		3.875	2.625	C02776
1/4	E	.2500		4.000	2.750	C02785
9/32		.2812		4.250	2.938	C02807
19/64		.2969		4.375	3.063	C02811
5/16		.3125		4.500	3.188	C02818
11/32		.3438		4.750	3.188	C02833
3/8		.3750		5.000	3.625	C02848
13/32		.4062		5.250	3.875	C02861
7/16		.4375		5.500	4.063	C02867
15/32		.4688		5.750	4.313	C02872
1/2		.5000		6.000	4.500	C02877

*Not split point.

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				>45
Black Oxide		♦		☆		♦		☆	♦				


☆ = Best Performance ♦ = Acceptable



- ♦ High helix for efficient chip removal.
- ♦ Operating parameters:
See Technical section

ASME
B94.11MM42
Cobalt

135° Split

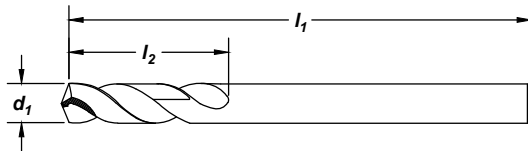High Helix
35° to 45°Straight
ShankSurface
TreatmentBlack
Oxide

Jobber Length

Cobalt

Feature:

Preferred point for work hardening materials, with extra heavy web for superior rigidity.

drill diameter			decimal equivalent	overall length		flute length	order number 3780 black oxide
fraction	d ₁	wire/letter		l ₁ (in)	l ₂ (in)		
		*60	.0400	1.625	.500		C15880
		*59	.0410	1.625	.500		C15881
		*58	.0420	1.625	.500		C15882
		*57	.0430	1.750	.500		C15883
		*56	.0465	1.750	.500		C15884
*3/64			.0469	1.750	.500		C15885
		*55	.0520	1.750	.625		C15886
		*54	.0550	1.875	.625		C15887
		*53	.0595	1.875	.625		C15888
1/16			.0625	1.875	.625		C15889
		52	.0635	1.875	.688		C15890
		51	.0670	2.000	.688		C15891
		50	.0700	2.000	.688		C15892
		49	.0730	2.000	.688		C15893
		48	.0760	2.000	.688		C15894
5/64			.0781	2.000	.688		C15895
		47	.0785	2.000	.688		C15896
		46	.0810	2.125	.750		C15897
		45	.0820	2.125	.750		C15898
		44	.0860	2.125	.750		C15899
		43	.0890	2.250	.750		C15900
		42	.0935	2.250	.750		C15901
3/32			.0938	2.250	.750		C15902
		41	.0960	2.375	.813		C15903
		40	.0980	2.375	.813		C15904
		39	.0995	2.375	.813		C15905
		38	.1015	2.500	.813		C15906
		37	.1040	2.500	.813		C15907
		36	.1065	2.500	.813		C15908
7/64			.1094	2.625	.813		C15909
		35	.1100	2.625	.875		C15910
		34	.1110	2.625	.875		C15911
		33	.1130	2.625	.875		C15912
		32	.1160	2.750	.875		C15913
		31	.1200	2.750	.875		C15914

*Not split point.

continued on next page

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				
Black Oxide	♦			♦		♦	♦	♦	♦		♦		
✧ = Best Performance ♦ = Acceptable													

**Q-AMD™ Short Flute - Aircraft Maintenance****Styles: 3780** (continued)

Jobber Length

Cobalt

drill diameter		decimal equivalent	overall length		flute length	order number 3780 black oxide
fraction	d ₁ wire/letter		l ₁ (in)			
1/8		.1250	2.750		.875	C15915
	30	.1285	2.750		.938	C15916
	29	.1360	2.875		.938	C15917
9/64	28	.1405	2.875		.938	C15918
		.1406	2.875		.938	C15919
	27	.1440	3.000		1.000	C15920
	26	.1470	3.000		1.000	C15921
	25	.1495	3.000		1.000	C15922
	24	.1520	3.125		1.000	C15923
5/32	23	.1540	3.125		1.000	C15924
		.1562	3.125		1.000	C15925
	22	.1570	3.125		1.063	C15926
	21	.1590	3.250		1.063	C15927
	20	.1610	3.250		1.063	C15928
	19	.1660	3.250		1.063	C15929
11/64	18	.1695	3.250		1.063	C15930
		.1719	3.250		1.063	C15931
	17	.1730	3.375		1.125	C15932
	16	.1770	3.375		1.125	C15933
	15	.1800	3.375		1.125	C15934
	14	.1820	3.375		1.125	C15935
3/16	13	.1850	3.500		1.125	C15936
		.1875	3.500		1.125	C15937
	12	.1890	3.500		1.188	C15938
	11	.1910	3.500		1.188	C15939
	10	.1935	3.625		1.188	C15940
	9	.1960	3.625		1.188	C15941
13/64	8	.1990	3.625		1.188	C15942
	7	.2010	3.625		1.188	C15943
		.2031	3.625		1.188	C15944
	6	.2040	3.750		1.250	C15945
	5	.2055	3.750		1.250	C15946
	4	.2090	3.750		1.250	C15947
7/32	3	.2130	3.750		1.250	C15948
		.2188	3.750		1.250	C15949
	2	.2210	3.875		1.313	C15950
15/64	1	.2280	3.875		1.313	C15951
	A	.2340	3.875		1.313	C15952
		.2344	3.875		1.313	C15953
	B	.2380	4.000		1.375	C15954
	C	.2420	4.000		1.375	C15955
	D	.2460	4.000		1.375	C15956
1/4	E	.2500	4.000		1.375	C15957
	F	.2570	4.125		1.438	C15958
	G	.2610	4.125		1.438	C15959
17/64		.2656	4.125		1.438	C15960
	H	.2660	4.125		1.500	C15961
	I	.2720	4.125		1.500	C15962
9/32	J	.2770	4.125		1.500	C15963
	K	.2810	4.250		1.500	C15964
		.2812	4.250		1.500	C15965
19/64	L	.2900	4.250		1.563	C15966
	M	.2950	4.375		1.563	C15967
		.2969	4.375		1.563	C15968
5/16	N	.3020	4.375		1.625	C15969
		.3125	4.500		1.625	C15970
	O	.3160	4.500		1.688	C15971

continued on next page



drill diameter		decimal equivalent	overall length		flute length		order number
fraction	d ₁ wire/letter		l ₁ (in)		l ₂ (in)		3780 black oxide
21/64	P	.3230	4.625		1.688		C15972
		.3281	4.625		1.688		C15973
	Q	.3320	4.750		1.688		C15974
11/32	R	.3390	4.750		1.688		C15975
		.3438	4.750		1.688		C15976
	S	.3480	4.875		1.750		C15977
23/64	T	.3580	4.875		1.750		C15978
		.3594	4.875		1.750		C15979
	U	.3680	5.000		1.813		C15980
3/8		.3750	5.000		1.813		C15981
	V	.3770	5.000		1.875		C15982
	W	.3860	5.125		1.875		C15983
25/64		.3906	5.125		1.875		C15984
	X	.3970	5.125		1.938		C15985
	Y	.4040	5.250		1.938		C15986
13/32		.4062	5.250		1.938		C15987
	Z	.4130	5.250		2.000		C15988
27/64		.4219	5.375		2.000		C15989
7/16		.4375	5.500		2.063		C15990
29/64		.4531	5.625		2.125		C15991
15/32		.4688	5.750		2.125		C15992
31/64		.4844	5.875		2.188		C15993
1/2		.5000	6.000		2.250		C15994

Jobber Length

Cobalt

Q-AMD™ Short Flute - Aircraft Maintenance

Styles: 3780

SET



no. of pieces	surface treatment	size range	order number
29	black oxide	1/16" through 1/2" x 1/64"	3780 C14499

Material Reference	Steel (HRC)				Stainless Steel		Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	PH	18-22	22-32		>45
Black Oxide		◆		◆		◆	◆		◆	◆	◆	

☆ = Best Performance ◆ = Acceptable



HOLEMAKING

Carbide Tipped

Style: **2727**

Go To: [TABLE OF CONTENTS](#) All Products: www.gfii.com/literature/cleveland



- ♦ Operating parameters:
See Technical section

Carbon Steel
Carbide
Tipped

118°


Helix
Regular
21° to 34°

Straight
Shank

Surface
Treatment

Bright

Jobber Length

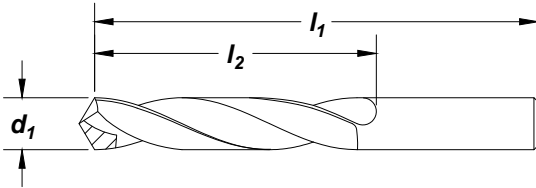

Carbide

drill diameter			decimal equivalent	overall length		order number 2727 bright
fraction	d ₁	wire/letter		l ₁ (in)	l ₂ (in)	
1/8			.1250	2.750	1.625	C48655
5/32			.1562	3.125	2.000	C48675
3/16			.1875	3.500	2.313	C48697
		7	.2010	3.625	2.438	C48707
7/32			.2188	3.750	2.500	C48718
1/4		E	.2500	4.000	2.750	C48736
9/32			.2812	4.250	2.938	C48758
5/16			.3125	4.500	3.188	C48769
11/32			.3438	4.750	3.438	C48784
3/8			.3750	5.000	3.625	C48799
13/32			.4062	5.250	3.875	C48812
7/16			.4375	5.500	4.063	C48818
15/32			.4688	5.750	4.313	C48823
1/2			.5000	6.000	4.500	C48828

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				>45
	Bright	☆		♦		♦		☆		☆			

☆ = Best Performance

♦ = Acceptable



- ♦ Tolerances for Series DM Drills:
Cutting Diameter: +.000, -.0005
Shank Diameter: +.0000, -.0005


ASME
B94.11M

Carbide

140° 4-Facet

Helix
High
35° to 45°Straight
ShankSurface
Treatment

Bright

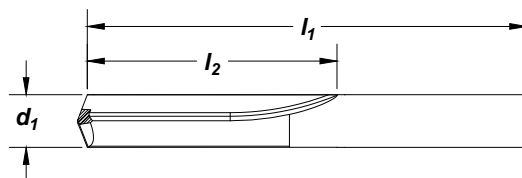

Jobber Length

Carbide

cutting diameter		decimal equivalent	overall length		flute length		order number
d ₁ fraction	wire/letter		l ₁ (in)		l ₂ (in)		1766 bright
1/32		.0313	1-1/2		1/2		C89410
	60	.0400	1-1/2		1/2		C89411
	59	.0410	1-1/2		1/2		C89412
	58	.0420	1-1/2		1/2		C89413
	57	.0430	1-1/2		1/2		C89414
	56	.0465	1-1/2		1/2		C89415
3/64		.0469	1-1/2		1/2		C89416
	55	.0520	1-1/2		1/2		C89417
	54	.0550	1-1/2		1/2		C89418
	53	.0595	1-1/2		1/2		C89419
1/16		.0625	1-5/8		5/8		C89420
	52	.0635	1-11/16		11/16		C89421
	51	.0670	1-11/16		11/16		C89422
	50	.0700	1-11/16		11/16		C89423
	49	.0730	1-11/16		11/16		C89424
	48	.0760	1-11/16		11/16		C89425
5/64		.0781	1-11/16		11/16		C89426
	47	.0785	1-3/4		3/4		C89427
	46	.0810	1-3/4		3/4		C89428
	45	.0820	1-3/4		3/4		C89429
	44	.0860	1-3/4		3/4		C89430
	43	.0890	1-3/4		3/4		C89431
	42	.0935	1-3/4		3/4		C89432
	3/32		.0938	1-3/4		3/4	
41		.0960	1-13/16		13/16		C89434
40		.0980	1-13/16		13/16		C89435
39		.0995	1-13/16		13/16		C89436
38		.1015	1-13/16		13/16		C89437
37		.1040	1-13/16		13/16		C89438
36		.1065	1-13/16		13/16		C89439
7/64			.1094	1-13/16		13/16	
	35	.1100	1-7/8		7/8		C89441
	34	.1110	1-7/8		7/8		C89442
	33	.1130	1-7/8		7/8		C89443
	32	.1160	1-7/8		7/8		C89444
	31	.1200	1-7/8		7/8		C89445
1/8		.1250	1-7/8		7/8		C89446
	30	.1285	1-15/16		15/16		C89447
	29	.1360	1-15/16		15/16		C89448
	28	.1405	1-15/16		15/16		C89449

continued on next page

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				>45
	Bright	☆	◆	☆	◆	◆		☆	☆	◆			◆

☆ = Best Performance ◆ = Acceptable



Straight Flute

Style: 1766 (continued)



Jobber Length

Carbide

cutting diameter		decimal equivalent	overall length		flute length	order number 1766 bright
fraction	wire/letter		l ₁ (in)	l ₂ (in)		
9/64		.1406	1-15/16	15/16		C89450
	27	.1440	2-1/16	1		C89451
	26	.1470	2-1/16	1		C89452
	25	.1495	2-1/16	1		C89453
	24	.1520	2-1/16	1		C89454
5/32	23	.1540	2-1/16	1		C89455
		.1562	2-1/16	1		C89456
	22	.1570	2-1/8	1-1/16		C89457
	21	.1590	2-1/8	1-1/16		C89458
	20	.1610	2-1/8	1-1/16		C89459
11/64	19	.1660	2-1/8	1-1/16		C89460
	18	.1695	2-1/8	1-1/16		C89461
		.1719	2-1/8	1-1/16		C89462
	17	.1730	2-3/16	1-1/8		C89463
	16	.1770	2-3/16	1-1/8		C89464
3/16	15	.1800	2-3/16	1-1/8		C89465
	14	.1820	2-3/16	1-1/8		C89466
	13	.1850	2-3/16	1-1/8		C89467
		.1875	2-3/16	1-1/8		C89468
	12	.1890	2-1/4	1-3/16		C89469
13/64	11	.1910	2-1/4	1-3/16		C89470
	10	.1935	2-1/4	1-3/16		C89471
	9	.1960	2-1/4	1-3/16		C89472
	8	.1990	2-1/4	1-3/16		C89473
	7	.2010	2-1/4	1-3/16		C89474
7/32		.2031	2-1/4	1-3/16		C89475
	6	.2040	2-3/8	1-1/4		C89476
	5	.2055	2-3/8	1-1/4		C89477
	4	.2090	2-3/8	1-1/4		C89478
	3	.2130	2-3/8	1-1/4		C89479
15/64		.2188	2-3/8	1-1/4		C89480
	2	.2210	2-7/16	1-5/16		C89481
	1	.2280	2-7/16	1-5/16		C89482
		.2344	2-7/16	1-5/16		C89483
	1/4	.2500	2-1/2	1-3/8		C89484
17/64		.2656	2-5/8	1-7/16		C89485
9/32		.2812	2-11/16	1-1/2		C89486
19/64		.2969	2-3/4	1-9/16		C89487
5/16		.3125	2-13/16	1-5/8		C89488
21/64		.3281	2-15/16	1-11/16		C89489
11/32		.3438	3	1-11/16		C89490
23/64		.3594	3-1/16	1-3/4		C89491
3/8		.3750	3-1/8	1-13/16		C89492
25/64		.3906	3-1/4	1-7/8		C89493
13/32		.4062	3-5/16	1-15/16		C89494
27/64		.4219	3-3/8	2		C89495
7/16		.4375	3-7/16	2-1/16		C89496
29/64		.4531	3-9/16	2-1/8		C89497
15/32		.4688	3-5/8	2-1/8		C89498
31/64		.4844	3-11/16	2-3/16		C89499
1/2		.5000	3-3/4	2-1/4		C89500

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				
Bright	☆	★	☆	★	★			☆	☆	★			★
☆ = Best Performance ★ = Acceptable													




♦ Operating parameters:
See Technical section

Carbide

118° 4-Facet

Helix
Low
10° to 20°Straight
ShankSurface
Treatment

Bright

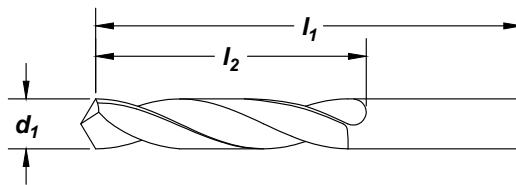

Jobber Length

Feature:

Run at 2-3 times SFM over HSS drills.

drill diameter			overall length		flute length		order number
d ₁			l ₁		l ₂		1727
fraction	wire	mm	inch	mm	inch	mm	bright
1/32			1.250		0.313		C89501
	60		1.500		0.750		C89502
	59		1.500		0.750		C89503
	58		1.500		0.750		C89504
	57		1.500		0.750		C89505
	56		1.500		0.750		C89506
3/64			1.500		0.750		C89507
	55		1.500		0.750		C89508
	54		1.500		0.750		C89509
	53		1.500		0.750		C47517
1/16			1.500		0.750		C47519
	52		1.500		0.750		C89512
	51		1.500		0.750		C89513
	50		1.750		0.875		C47526
	49		1.750		0.875		C89515
	48		1.750		0.875		C89516
5/64			1.750		0.875		C89517
	47		1.750		0.875		C89518
	46		1.750		0.875		C89519
	45		1.750		0.875		C89520
	44		2.000		1.000		C89521
	43		2.000		1.000		C89522
	42		2.000		1.000		C89523
3/32			2.000		1.000		C47548
	41		2.000		1.000		C89525
	40		2.000		1.000		C47552
	39		2.250		1.250		C89527
	38		2.250		1.250		C89528
	37		2.250		1.250		C89529
	36		2.250		1.250		C89530
7/64			2.250		1.250		C47561
	35		2.250		1.250		C89532
	34		2.250		1.250		C89533
	33		2.250		1.250		C89534

continued on next page

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	13-38	>38	16-38	> 38	300 Series	400 series		18-22	22-32				
Bright	♦		♦		♦			☆		☆			

☆ = Best Performance ♦ = Acceptable



Heavy Duty

Style: 1727 (continued)



Jobber Length

Carbide

drill diameter			decimal equivalent	overall length		flute length		order number
fraction	d1 wire	mm		l1		l2		1727 bright
				inch	mm	inch	mm	
	32		0.1160	2.250		1.250		C89535
		3.0	0.1182		61		33	C47239
	31		0.1200	2.250		1.250		C89536
		3.1	0.1221		65		36	C47240
1/8			0.1250	2.250		1.250		C47571
		3.2	0.1260		65		36	C47241
	30		0.1285	2.500		1.375		C47574
		3.3	0.1300		65		36	C47242
		3.4	0.1339		70		39	C47243
	29		0.1360	2.500		1.375		C89539
		3.5	0.1378		70		39	C47244
	28		0.1405	2.500		1.375		C89540
9/64			0.1406	2.500		1.375		C47580
	27		0.1440	2.500		1.375		C47582
	26		0.1470	2.500		1.375		C89543
	25		0.1495	2.500		1.375		C89544
	24		0.1520	2.500		1.375		C89545
	23		0.1540	2.500		1.375		C89546
5/32			0.1562	2.500		1.375		C47591
	22		0.1570	2.500		1.375		C89548
		4.0	0.1575		75		43	C47245
	21		0.1590	2.500		1.375		C89549
	20		0.1610	2.500		1.375		C89550
		4.5	0.1615		80		47	C47246
	19		0.1660	2.750		1.625		C89551
	18		0.1695	2.750		1.625		C89552
11/64			0.1719	2.750		1.625		C47602
	17		0.1730	2.750		1.625		C89554
	16		0.1770	2.750		1.625		C89555
	15		0.1800	2.750		1.625		C89556
	14		0.1820	2.750		1.625		C89557
	13		0.1850	2.750		1.625		C89558
3/16			0.1875	2.750		1.625		C47613
	12		0.1890	2.750		1.625		C89560
	11		0.1910	2.750		1.625		C89561
	10		0.1935	2.750		1.625		C47618
	9		0.1960	3.000		1.750		C89563
		5.0	0.1969		86		52	C47247
	8		0.1990	3.000		1.750		C89564
	7		0.2010	3.000		1.750		C47623
13/64			0.2031	3.000		1.750		C89566
	6		0.2040	3.000		1.750		C47625
	5		0.2055	3.000		1.750		C89568
	4		0.2090	3.000		1.750		C89569
	3		0.2130	3.000		1.750		C89570
		5.5	0.2166		93		57	C47248
7/32			0.2188	3.000		1.750		C47634
	2		0.2210	3.000		1.750		C89572
	1		0.2280	3.000		1.750		C89573
	A		0.2340	3.250		2.000		C89574
15/64			0.2344	3.250		2.000		C89575
		6.0	0.2363		93		57	C47249
	B		0.2380	3.250		2.000		C89576
	C		0.2420	3.250		2.000		C89577
	D		0.2460	3.250		2.000		C89578
1/4	E		0.2500	3.250		2.000		C47648

continued on next page



drill diameter			decimal equivalent	overall length		flute length		order number
fraction	d ₁ wire	mm		inch	mm	inch	mm	1727 bright
		6.5	0.2560		101		63	C47250
	F		0.2570	3.250		2.000		C89580
	G		0.2610	3.500		2.125		C89581
17/64			0.2656	3.500		2.125		C89582
	H		0.2660	3.500		2.125		C89583
	I		0.2720	3.500		2.125		C89584
		7.0	0.2756		109		69	C47251
	J		0.2770	3.500		2.125		C89585
	K		0.2810	3.500		2.125		C89586
9/32			0.2812	3.500		2.125		C89587
	L		0.2900	3.500		2.125		C89588
	M		0.2950	4.000		2.375		C89589
		7.5	0.2953		109		69	C47252
19/64			0.2969	4.000		2.375		C89590
	N		0.3020	4.000		2.375		C89591
5/16			0.3125	4.000		2.375		C47671
		8.0	0.3150		117		75	C47253
	O		0.3160	4.000		2.375		C89593
	P		0.3230	4.000		2.375		C89594
21/64			0.3281	4.000		2.500		C89595
	Q		0.3320	4.000		2.500		C89596
		8.5	0.3347		117		75	C47254
	R		0.3390	4.000		2.500		C89615
11/32			0.3438	4.000		2.500		C89597
	S		0.3480	4.000		2.500		C89598
		9.0	0.3544		125		81	C47255
	T		0.3580	4.250		2.750		C89599
23/64			0.3594	4.250		2.750		C89600
	U		0.3680	4.250		2.750		C89601
		9.5	0.3741		125		81	C47256
3/8			0.3750	4.250		2.750		C47694
	V		0.3770	4.250		2.750		C89603
	W		0.3860	4.500		2.875		C89604
25/64			0.3906	4.500		2.875		C89605
		10.0	0.3938		133		87	C47257
	X		0.3970	4.500		2.875		C89606
	Y		0.4040	4.500		2.875		C89607
13/32			0.4062	4.500		2.875		C89608
	Z		0.4130	4.500		2.875		C89609
		10.5	0.4134		133		87	C47258
27/64			0.4219	4.500		2.875		C89610
		11.0	0.4331		142		94	C47259
7/16			0.4375	4.500		2.875		C47708
		11.5	0.4528		142		94	C47260
29/64			0.4531	4.750		3.000		C89612
15/32			0.4688	4.750		3.000		C89613
		12.0	0.4725		151		101	C47261
31/64			0.4844	4.750		3.000		C89614
1/2			0.5000	4.750		3.000		C47718

Jobber Length


Carbide

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				>45
	Bright	★		★		★		★		★			
★ = Best Performance ◆ = Acceptable													

**Carbide-Tipped - Heavy Duty, Tanged**
Style: 2745♦ Operating parameters:
See Technical sectionSurface
Treatment


Taper Length

Carbide

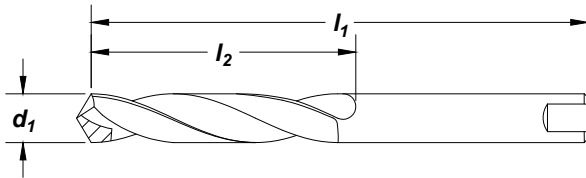**Feature:**

Run at carbide speeds with the flexibility of a HSS body and shank.

drill diameter	decimal equivalent	overall length	flute length	order number
d_1		l_1 (in)	l_2 (in)	2745 bright
1/8	.1250	5.125	2.750	C49017
5/32	.1562	5.375	3.000	C49029
3/16	.1875	5.750	3.375	C49041
7/32	.2188	6.000	3.625	C49052
1/4	.2500	6.125	3.750	C49064
9/32	.2812	6.250	3.875	C49078
5/16	.3125	6.375	4.000	C49087
11/32	.3438	6.500	4.125	C49098
3/8	.3750	6.750	4.250	C49110
13/32	.4062	7.000	4.375	C49119
27/64	.4219	7.250	4.625	C49121
7/16	.4375	7.250	4.625	C49124
15/32	.4688	7.500	4.750	C49129
1/2	.5000	7.750	4.750	C49134
17/32	.5312	8.000	4.750	C49139
9/16	.5625	8.250	4.875	C49145
5/8	.6250	8.750	4.875	C49155

TANG SPECIFICATIONS

shank diameter (inches)		tang dimensions (inches)	
from	to	width A	width B
1/8	3/16	.092	.281
over 3/16	1/4	.120	.312
over 1/4	5/16	.160	.344
over 5/16	3/8	.201	.375
over 3/8	15/32	.241	.438
over 15/32	9/16	.300	.500
over 9/16	21/32	.370	.563
over 21/32	3/4	.440	.625
over 3/4	7/8	.511	.688
over 7/8	1	.605	.750
over 1	1-3/16	.696	.813
over 1-3/16	1-3/8	.813	.875

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series						
	Bright	☆		☆				☆	♦	☆			

☆ = Best Performance ♦ = Acceptable




- ♦ Operating parameters:
See Technical section

ASME
B94.11MDIN
340

HSS

118°

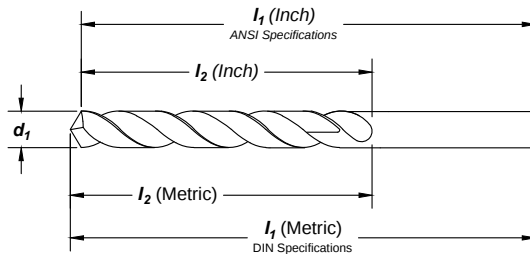Helix
Regular
21° to 34°Straight
ShankSurface
TreatmentBlack
Oxide**Feature:**

General purpose with longer length for added reach.

drill diameter			overall length		flute length	order number 2510 black oxide
d ₁ fraction	wire	decimal equivalent	I ₁ inch	I ₂ inch	I ₂ inch	
3/64	60	.0400	2.250	1.125		C08593
	59	.0410	2.250	1.125		C08594
	58	.0420	2.250	1.125		C08596
	57	.0430	2.250	1.125		C08597
	56	.0465	2.250	1.125		C08600
		.0469	2.250	1.125		C08601
1/16	55	.0520	3.000	1.750		C08605
	54	.0550	3.000	1.750		C08607
	53	.0595	3.000	1.750		C08611
		.0625	3.000	1.750		C08613
	52	.0635	3.750	2.000		C08615
	51	.0670	3.750	2.000		C08618
5/64	50	.0700	3.750	2.000		C08620
	49	.0730	3.750	2.000		C08623
	48	.0760	3.750	2.000		C08625
		.0781	3.750	2.000		C08627
	47	.0785	4.250	2.250		C08628
	46	.0810	4.250	2.250		C08631
3/32	45	.0820	4.250	2.250		C08632
	44	.0860	4.250	2.250		C08635
	43	.0890	4.250	2.250		C08638
	42	.0935	4.250	2.250		C08641
		.0938	4.250	2.250		C08642
	41	.0960	4.625	2.500		C08644
7/64	40	.0980	4.625	2.500		C08646
	39	.0995	4.625	2.500		C08648
	38	.1015	4.625	2.500		C08649
	37	.1040	4.625	2.500		C08651
	36	.1065	4.625	2.500		C08653
		.1094	4.625	2.500		C08655
	35	.1100	5.125	2.750		C08656
	34	.1110	5.125	2.750		C08658
	33	.1130	5.125	2.750		C08659
	32	.1160	5.125	2.750		C08661
	31	.1200	5.125	2.750		C08663

continued on next page

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				>45
	Black Oxide	☆		☆				☆	☆				
☆ = Best Performance ♦ = Acceptable													



General Purpose

Style: 2510 (continued)



Taper Length

High Speed Steel

drill diameter		decimal equivalent	overall length	flute length	order number
d ₁ fraction	wire		l ₁ inch	l ₂ inch	2510 black oxide
1/8		.1250	5.125	2.750	C08665
	30	.1285	5.375	3.000	C08668
	29	.1360	5.375	3.000	C08671
	28	.1405	5.375	3.000	C08673
9/64		.1406	5.375	3.000	C08674
	27	.1440	5.375	3.000	C08676
	26	.1470	5.375	3.000	C08678
	25	.1495	5.375	3.000	C08680
	24	.1520	5.375	3.000	C08682
	23	.1540	5.375	3.000	C08684
5/32		.1562	5.375	3.000	C08685
	22	.1570	5.750	3.375	C08686
	21	.1590	5.750	3.375	C08688
	20	.1610	5.750	3.375	C08689
	19	.1660	5.750	3.375	C08692
	18	.1695	5.750	3.375	C08695
11/64		.1719	5.750	3.375	C08696
	17	.1730	5.750	3.375	C08697
	16	.1770	5.750	3.375	C08699
	15	.1800	5.750	3.375	C08701
	14	.1820	5.750	3.375	C08703
	13	.1850	5.750	3.375	C08704
3/16		.1875	5.750	3.375	C08707
	12	.1890	6.000	3.625	C08708
	11	.1910	6.000	3.625	C08710
	10	.1935	6.000	3.625	C08712
	9	.1960	6.000	3.625	C08713
	8	.1990	6.000	3.625	C08715
	7	.2010	6.000	3.625	C08717
13/64		.2031	6.000	3.625	C08718
	6	.2040	6.000	3.625	C08719
	5	.2055	6.000	3.625	C08721
	4	.2090	6.000	3.625	C08724
	3	.2130	6.000	3.625	C08726
7/32		.2188	6.000	3.625	C08728
	2	.2210	6.125	3.750	C08730
	1	.2280	6.125	3.750	C08733
15/64		.2344	6.125	3.750	C08737
	D	.2460	6.125	3.750	C08743
1/4	E	.2500	6.125	3.750	C08746
	F	.2570	6.250	3.875	C08750
17/64		.2656	6.250	3.875	C08752
	I	.2720	6.250	3.875	C08757
	J	.2770	6.250	3.875	C08759
9/32		.2812	6.250	3.875	C08766
19/64		.2969	6.375	4.000	C08770
	N	.3020	6.375	4.000	C08772
5/16		.3125	6.375	4.000	C08777
	O	.3160	6.500	4.125	C08779
	P	.3230	6.500	4.125	C08782
21/64		.3281	6.500	4.125	C08785
	Q	.3320	6.500	4.125	C08787
	R	.3390	6.500	4.125	C08790
11/32		.3438	6.500	4.125	C08792
23/64		.3594	6.750	4.250	C08800
3/8		.3750	6.750	4.250	C08807

continued on next page



drill diameter		decimal equivalent	overall length	flute length	order number
d1	wire		l1	l2	2510 black oxide
fraction			inch	inch	
	V	.3770	7.000	4.375	C08808
25/64		.3906	7.000	4.375	C08815
13/32		.4062	7.000	4.375	C08821
27/64		.4219	7.250	4.625	C08824
7/16		.4375	7.250	4.625	C08827
29/64		.4531	7.500	4.750	C08830
15/32		.4688	7.500	4.750	C08832
31/64		.4844	7.750	4.750	C08835
1/2		.5000	7.750	4.750	C08837
33/64		.5156	8.000	4.750	C08840
17/32		.5312	8.000	4.750	C08842
35/64		.5469	8.250	4.875	C08845
9/16		.5625	8.250	4.875	C08848
37/64		.5781	8.750	4.875	C08850
19/32		.5938	8.750	4.875	C08853
39/64		.6094	8.750	4.875	C08855
5/8		.6250	8.750	4.875	C08858
41/64		.6406	9.000	5.125	C08861
21/32		.6562	9.000	5.125	C08863
43/64		.6719	9.250	5.375	C08866
11/16		.6875	9.250	5.375	C08868
45/64		.7031	9.500	5.625	C08870
23/32		.7188	9.500	5.625	C08872
47/64		.7344	9.750	5.875	C08874
3/4		.7500	9.750	5.875	C08876
49/64		.7656	9.875	6.000	C08877
25/32		.7812	9.875	6.000	C08879
51/64		.7969	10.000	6.125	C08881
13/16		.8125	10.000	6.125	C08883
53/64		.8281	10.000	6.125	C08885
27/32		.8438	10.000	6.125	C08886
55/64		.8594	10.000	6.125	C08888
7/8		.8750	10.000	6.125	C08890
57/64		.8906	10.000	6.125	C08892
29/32		.9062	10.000	6.125	C08894
59/64		.9219	10.750	6.125	C08895
15/16		.9375	10.750	6.125	C08897
61/64		.9531	11.000	6.375	C08899
31/32		.9688	11.000	6.375	C08901
63/64		.9844	11.000	6.375	C08903
1		1.0000	11.000	6.375	C08904


Taper Length

High Speed Steel

General Purpose
Style: 2510

SET

no. of pieces	surface treatment	size range	order number 2510
29	black oxide	1/16" through 1/2" x 1/64"	C00962



Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				>45
	Black Oxide	☆		☆				☆	☆				


☆ = Best Performance ◆ = Acceptable

**Heavy Duty**
Style: 2513♦ Operating parameters:
See Technical sectionASME
B94.11MM42
Cobalt

135° Split

Helix
Regular
21° to 34°Surface
TreatmentStraw
Oxide

Taper Length

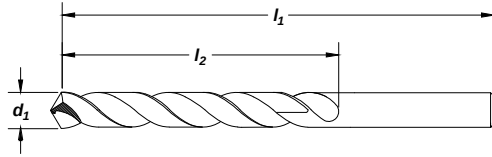

Cobalt

Feature:

Highly heat resistant substrate for tough to machine materials.

drill diameter	decimal	overall length	flute length	order number
d_1	equivalent	l_1 (in)	l_2 (in)	2513 straw oxide
1/16	.0625	3.000	1.750	C83000
5/64	.0781	3.750	2.000	C83001
3/32	.0938	4.250	2.250	C83002
40	.0980	4.625	2.500	C83026
38	.1015	4.625	2.500	C83025
37	.1040	4.625	2.500	C83024
36	.1065	4.625	2.500	C83023
7/64	.1094	4.625	2.500	C83003
33	.1130	5.125	2.750	C83022
1/8	.1250	5.125	3.750	C14873
30	.1285	5.375	3.000	C83021
29	.1360	5.375	3.000	C83020
9/64	.1406	5.375	3.000	C14882
27	.1440	5.375	3.000	C83019
26	.1470	5.375	3.000	C83018
5/32	.1562	5.375	3.000	C14893
21	.1590	5.750	3.375	C83017
20	.1610	5.750	3.375	C83016
11/64	.1719	5.750	3.375	C83004
16	.1770	5.750	3.375	C83015
15	.1800	5.750	3.375	C83014
3/16	.1875	5.750	3.375	C14915
7	.2010	6.000	3.625	C83013
13/64	.2031	6.000	3.625	C83005
3	.2130	6.000	3.625	C83012
7/32	.2188	6.000	3.625	C14935
1	.2280	6.125	3.750	C83011
15/64	.2344	6.125	3.750	C83006
1/4	.2500	6.125	3.750	C14954
17/64	.2656	6.250	3.875	C83007
9/32	.2812	6.250	3.875	C14973
19/64	.2969	6.375	4.000	C83008
5/16	.3125	6.375	4.000	C14984
21/64	.3281	6.500	4.125	C83009
11/32	.3438	6.500	4.125	C14999
23/64	.3594	6.750	4.250	C15007

continued on next page



drill diameter	decimal equivalent	overall length	flute length	order number
d₁		l₁ (in)	l₂ (in)	2513 straw oxide
3/8	.3750	6.750	4.250	C15014
25/64	.3906	7.000	4.375	C83010
13/32	.4062	7.000	4.375	C15028
27/64	.4219	7.250	4.625	C15031
7/16	.4375	7.250	4.625	C15034
29/64	.4531	7.500	4.750	C15037
15/32	.4688	7.500	4.750	C15039
31/64	.4844	7.750	4.750	C15042
1/2	.5000	7.750	4.750	C15044

Taper Length

Cobalt

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				>45
Straw		★		☆		★	☆		★	☆			

☆ = Best Performance ★ = Acceptable



Parabolic

Styles: 2565, 2565-TN



Note

- ♦ Operating parameters: See Technical section
- ♦ Adjust the parameters as follows: double the given feed rate.

ASME
B94.11M

HSS

135° Split


Helix
High
35° to 45°Surface
Treatment

Bright

TiN

Taper Length

High Speed Steel

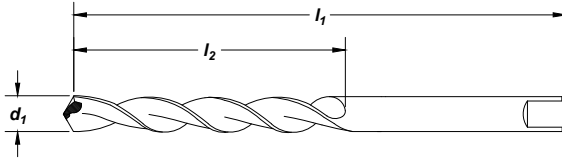

Feature:

Excels in deep hole drilling without pecking in softer, free machining materials. Drill up to 10x diameter without pecking. Taper length for extended reach. Standard with automotive tang.

drill diameter							order number	
fraction	d ₁	wire/let	decimal equivalent	overall length	flute length	2565 bright	2565-TN TiN	
				l ₁ (in)	l ₂ (in)			
1/16			.0625	3.000	1.750	C16058	C05105	
5/64			.0781	3.750	2.000	C16059	C05111	
3/32			.0938	4.250	2.250	C16060	C05118	
7/64			.1094	4.625	2.500	C16061	C05125	
1/8			.1250	5.125	2.750	C16062	C05131	
		30	.1285	5.375	3.000	C16249	—	
		29	.1360	5.375	3.000	C16248	—	
9/64			.1406	5.375	3.000	C16063	C05135	
		26	.1470	5.375	3.000	C16245	—	
		25	.1495	5.375	3.000	C16244	—	
5/32			.1562	5.375	3.000	C16064	C05141	
		21	.1590	5.750	3.375	C16240	—	
		20	.1610	5.750	3.375	C16239	—	
11/64			.1719	5.750	3.375	C16065	C05147	
3/16			.1875	5.750	3.375	C16066	C05153	
		9	.1960	6.000	3.625	C16228	—	
13/64			.2031	6.000	3.625	C16067	C05160	
7/32			.2188	6.000	3.625	C16068	C05165	
15/64			.2344	6.125	3.750	C16069	C05169	
1/4		E	.2500	6.125	3.750	C16070	C05173	
17/64			.2656	6.250	3.875	C16071	C05176	
9/32			.2812	6.250	3.875	C16072	C05181	
19/64			.2969	6.375	4.000	C16073	C05184	
5/16			.3125	6.375	4.000	C16074	C05185	
21/64			.3281	6.500	4.125	C16075	C05187	
11/32			.3438	6.500	4.125	C16076	C05190	
23/64			.3594	6.750	4.250	C16077	C05193	
3/8			.3750	6.750	4.250	C16078	C05195	
25/64			.3906	7.000	4.375	C16079	C05198	
13/32			.4062	7.000	4.375	C16080	C05201	
27/64			.4219	7.250	4.625	C16081	C05203	
7/16			.4375	7.250	4.625	C16082	C05204	
29/64			.4531	7.500	4.750	C16083	C05205	
15/32			.4688	7.500	4.750	C16084	C05206	
31/64			.4844	7.750	4.750	C16085	C05207	
1/2			.5000	7.750	4.750	C16086	C05208	
33/64			.5156	8.000	6.000	C13000	C13019	
17/32			.5312	8.000	6.000	C13001	C13020	

continued on next page



drill diameter		decimal equivalent	overall length		flute length		order number	
d_1			l_1 (in)		l_2 (in)		2565 bright	2565-TN TiN
fraction	wire/let							
35/64		.5469	8.250		6.250		C13002	C13022
9/16		.5625	8.250		6.250		C13004	C13023
37/64		.5781	8.750		6.500		C13005	C13024
19/32		.5938	8.750		6.500		C13006	C13026
5/8		.6250	8.750		6.500		C13008	C13028

Taper Length

High Speed Steel

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	13-38	>38	16-38	> 38	300 Series	400 series		18-22	22-32				
	Hardness												
	Bright	★		★	★					★			
	TiN	★		★	★								
★ = Best Performance ◆ = Acceptable													



HOLEMAKING

Wide Land Parabolic - Q-Cobalt™

Styles: **2575, 2575-TN**

Go To: [TABLE OF CONTENTS](#) All Products: www.gfii.com/literature/cleveland



♦ Operating parameters:
See Technical section

ASME
B94.11M

DIN
340

M42
Cobalt

135° Split

Helix
High
35° to 45°

Straight
Shank


Surface
Treatment

Straw
Oxide

TiN

Taper Length

Cobalt

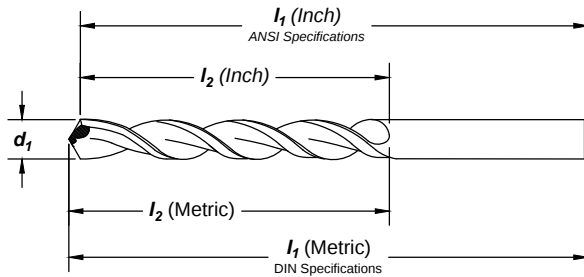

Feature:

Effective deep hole drilling in a wide array of materials. Available coating for extended tool life and productivity. Longer design for deeper holes and extended reach.

drill diameter			overall length		flute length		order number	
fraction	d ₁ wire/let	decimal equivalent	I ₁ (in) inch	I ₁ (in) mm	I ₂ (in) inch	I ₂ (in) mm	2575 straw oxide	2575-TN TiN
		*1.50		76.00		44.00	C16805	C16914
1/16		.0625	3.000		1.750		C16776	C16885
5/64		.0781	3.750		2.000		C16777	C16886
3/32		.0938	4.250		2.250		C16778	C16887
7/64		.1094	4.625		2.500		C16779	C16888
1/8		.1250	5.125		2.750		C16780	C16889
9/64		.1406	5.375		3.000		C16781	C16890
5/32		.1562	5.375		3.000		C16782	C16891
	4.00	.1575		146.00		86.00	C16810	—
11/64		.1719	5.750		3.375		C16783	C16892
3/16		.1875	5.750		3.375		C16784	C16893
	5.00	.1969		152.00		92.00	C16812	C16921
13/64		.2031	6.000		3.625		C16785	C16894
7/32		.2188	6.000		3.625		C16786	C16895
15/64		.2344	6.125		3.750		C16787	C16896
	6.00	.2362		156.00		95.00	C16816	C16925
1/4		.2500	6.125		3.750		C16788	C16897
17/64		.2656	6.250		3.875		C16789	C16898
9/32		.2812	6.250		3.875		C16790	C16899
19/64		.2969	6.375		4.000		C16791	C16900
5/16		.3125	6.375		4.000		C16792	C16901
21/64		.3281	6.500		4.125		C16793	C16902
11/32		.3438	6.500		4.125		C16794	C16903
23/64		.3594	6.750		4.250		C16795	C16904
3/8		.3750	6.750		4.250		C16796	C16905
25/64		.3906	7.000		4.375		C16797	C16906
13/32		.4062	7.000		4.375		C16798	C16907
27/64		.4219	7.250		4.625		C16799	C16908
7/16		.4375	7.250		4.625		C16800	C16909
29/64		.4531	7.500		4.750		C16801	C16910
15/32		.4688	7.500		4.750		C16802	C16911
31/64		.4844	7.750		4.750		C16803	C16912
1/2		.5000	7.750		4.750		C16804	C16913

*Not split point.

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	13-38	>38	16-38	> 38	300 Series	400 series		18-22	22-32				>45
Hardness													
Straw										☆			
TiN	♦		♦		♦	♦		♦	♦				


☆ = Best Performance ♦ = Acceptable



♦ Operating parameters:
See Technical section



Surface
Treatment

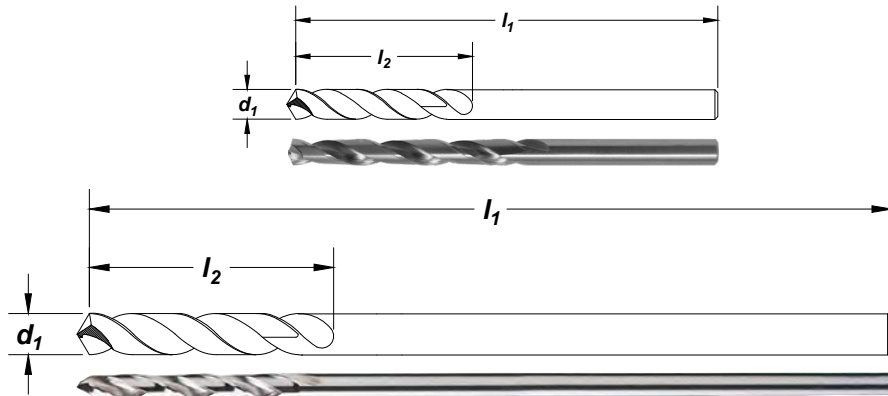
Feature:

Ideal for long reach drilling applications.

drill diameter			order number		flute length
d ₁		decimal equivalent	3957-6	3957-12	
fraction	wire/letter		overall length	l ₁ (6.0 in)	
*3/64		.0469	C13100	—	.750
1/16		.0625	C13101	C13176	.875
	52	.0635	C13174	—	.875
	51	.0670	C13173	—	1.000
	50	.0700	C13172	—	1.000
	49	.0730	C13171	—	1.000
	48	.0760	C13170	—	1.000
5/64		.0781	C13102	C13177	1.000
	47	.0785	C13169	—	1.125
	46	.0810	C13168	—	1.125
	45	.0820	C13167	—	1.125
	44	.0860	C13166	—	1.250
	43	.0890	C13165	—	1.250
	42	.0935	C13164	—	1.250
3/32		.0938	C13103	C13178	1.250
	41	.0960	C13163	—	1.375
	40	.0980	C13162	C13244	1.375
	39	.0995	C13161	C13243	1.375
	38	.1015	C13160	—	1.438
	37	.1040	C13159	—	1.438
	36	.1065	C13158	—	1.438
7/64		.1094	C13104	C13179	1.500
	35	.1100	C13157	—	1.500
	34	.1110	C13156	—	1.500
	33	.1130	C13155	—	1.500
	32	.1160	C13154	—	1.625
	31	.1200	C13153	C13242	1.625
1/8		.1250	C13105	C13180	1.625
	30	.1285	C13152	C13241	1.625
	29	.1360	C13151	C13240	1.750
	28	.1405	C13150	C13239	1.750

*Not split point.

continued on next page

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				>45
Bright	☆			☆		♦		♦		☆			

☆ = Best Performance ♦ = Acceptable



Aircraft NAS 907, Type B - 6" & 12" Extension

Styles: 3957-6, 3957-12 (continued)



Aircraft Extension

High Speed Steel

drill diameter			order number		flute length
d ₁			3957-6	3957-12	
fraction	wire/letter	decimal equivalent	overall	length	l ₂ (in)
9/64		.1406	l ₁ (6.0 in)	l ₁ (12.0 in)	l ₂ (in)
	27	.1440	C13106	C13181	1.750
	26	.1470	C13149	C13238	1.875
	25	.1495	C13148	C13237	1.875
	24	.1520	C13147	C13236	1.875
	23	.1540	C13146	C13235	2.000
		.1540	C13145	—	2.000
5/32		.1562	C13107	C13182	2.000
	22	.1570	C13144	—	2.000
	21	.1590	C13143	C13234	2.125
	20	.1610	C13142	C13233	2.125
	19	.1660	C13141	C13232	2.125
	18	.1695	C13140	—	2.125
11/64		.1719	C13108	C13183	2.125
	17	.1730	C13139	—	2.188
	16	.1770	C13138	C13231	2.188
	15	.1800	C13137	C13230	2.188
	14	.1820	C13136	—	2.188
	13	.1850	C13135	C13229	2.313
3/16		.1875	C13109	C13184	2.313
	12	.1890	C13134	C13228	2.313
	11	.1910	C13133	C13227	2.313
	10	.1935	C13132	C13226	2.438
	9	.1960	C13131	C13225	2.438
	8	.1990	C13130	C13224	2.438
	7	.2010	C13129	C13223	2.438
13/64		.2031	C13110	C13185	2.438
	6	.2040	C13128	C13222	2.500
	5	.2055	C13127	C13221	2.500
	4	.2090	C13126	—	2.500
	3	.2130	C13125	C13220	2.500
7/32		.2188	C13111	C13186	2.500
	2	.2210	C13124	C13219	2.625
	1	.2280	C13123	C13218	2.625
15/64		.2344	C13112	C13187	2.625
1/4	E	.2500	C13113	C13188	2.750
	F	.2570	C13122	—	2.875
17/64		.2656	—	C13189	2.625
17/64		.2656	C13245	—	2.875
9/32		.2812	C13114	C13190	3.063
19/64		.2969	—	C13191	3.063
5/16		.3125	C13115	C13192	3.188
	O	.3160	—	C13211	3.438
21/64		.3281	—	C13193	3.438
11/32		.3438	C13116	C13194	3.438
23/64		.3594	—	C13195	3.500
3/8		.3750	C13117	C13196	3.625
25/64		.3906	—	C13197	3.750
13/32		.4062	C13118	C13198	3.750
27/64		.4219	C13246	C13199	3.938
7/16		.4375	C13119	C13200	4.063
29/64		.4531	—	C13201	4.188
15/32		.4688	C13120	C13202	4.313
31/64		.4844	—	C13203	4.375
1/2		.5000	C13121	C13204	4.500

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				>45
	Bright	☆		☆		◆		◆		☆			


☆ = Best Performance ◆ = Acceptable



♦ Operating parameters:
See Technical section

M42
CobaltNAS 907
TYPE J

135° Split

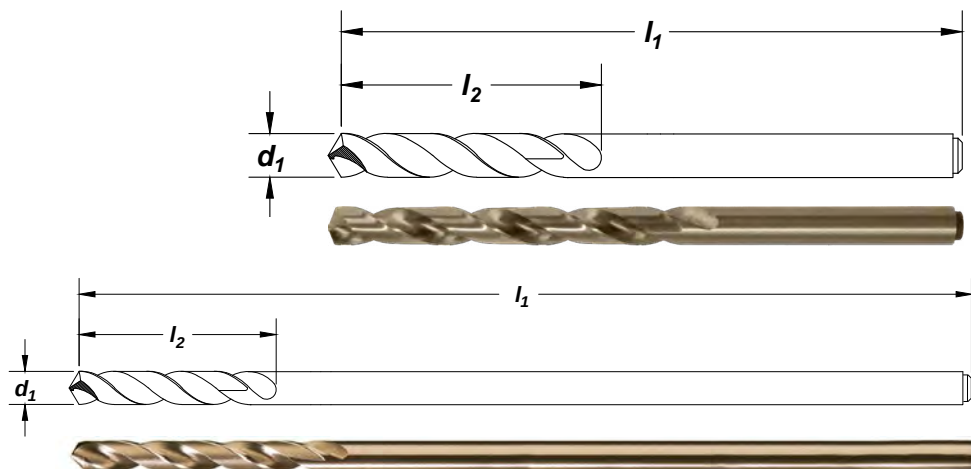Helix
Regular
21° to 34°Straight
ShankSurface
TreatmentStraw
Oxide**Feature:**

Highly heat resistant substrate for tough to machine materials. Extended length for long reach applications.

drill diameter			order number		flute length
			3722-6	3722-12	
			overall length		
			l ₁ (6.0 in)	l ₁ (12.0 in)	l ₂ (in)
fraction	d ₁	decimal equivalent			
	wire/letter				
3/32	42	0.0935	C08100	—	1.250
		0.0938	C08101	C08188	1.250
	41	0.0960	C08102	—	1.375
	40	0.0980	C08144	C08167	1.375
	39	0.0995	C08103	—	1.375
7/64	38	0.1015	C08104	—	1.438
	37	0.1040	C08105	—	1.438
	36	0.1065	C08106	—	1.438
		0.1094	C08107	C08168	1.500
	35	0.1100	C08108	—	1.500
1/8	34	0.1110	C08109	—	1.500
	32	0.1160	C08110	—	1.625
	31	0.1200	C08111	—	1.625
		0.1250	C08115	C08169	1.625
	30	0.1285	C08142	C08170	1.625
9/64	29	0.1360	C08112	C08171	1.750
	28	0.1405	C08113	—	1.750
		0.1406	C08114	C08172	1.750
	27	0.1440	C08140	C08173	1.875
	26	0.1470	C08145	—	1.875
	25	0.1495	C08146	—	1.875
	24	0.1520	C08147	—	2.000
	23	0.1540	C08148	—	2.000

continued on next page

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				
	Straw	☆		☆		☆	☆	♦	♦	☆	♦	♦	
☆ = Best Performance ♦ = Acceptable													

**Aircraft NAS 907, Type J - Heavy Duty**
Style: 3722-6, 3722-12 (continued)

Aircraft Extension

Cobalt

drill diameter			order number		flute length
d ₁		decimal equivalent	3722-6	3722-12	
fraction	wire/letter		overall length		
			l ₁ (6.0 in)	l ₁ (12.0 in)	l ₂ (in)
5/32		0.1562	C08117	C08174	2.000
	22	0.1570	C08149	—	2.000
	21	0.1590	C08138	C08175	2.125
	20	0.1610	C08137	C08176	2.125
	19	0.1660	C08150	C08177	2.125
	18	0.1695	C08151	—	2.125
11/64		0.1719	C08152	C08178	2.125
	17	0.1730	C08153	—	2.188
	16	0.1770	C08135	C08179	2.188
	15	0.1800	C08154	—	2.188
	14	0.1820	C08155	—	2.188
	13	0.1850	C08134	—	2.313
3/16		0.1875	C08119	C08180	2.313
	12	0.1890	C08156	—	2.313
	11	0.1910	C08133	C08181	2.313
	10	0.1935	C08132	C08182	2.438
	9	0.1960	C08157	—	2.438
	8	0.1990	C08130	—	2.438
	7	0.2010	C08158	—	2.438
13/64		0.2031	C08159	C08183	2.438
	6	0.2040	C08160	—	2.500
	5	0.2055	C08161	—	2.500
	4	0.2090	C08162	—	2.500
	3	0.2130	C08163	—	2.500
7/32		0.2188	C08121	C08184	2.500
	2	0.2210	C08164	C08185	2.625
	1	0.2280	C08165	—	2.625
15/64		0.2344	C08166	C08186	2.625
1/4		0.2500	C08123	C08187	2.750

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				
Straw		☆		☆		☆	☆	◆	◆	☆	◆	◆	
☆ = Best Performance ◆ = Acceptable													



♦ Operating parameters:
See Technical section

ASME
B94.11M

HSS


118° K-Notch

Helix
Regular
21° to 34°

Straight
Shank

Surface
Treatment

Black
Oxide

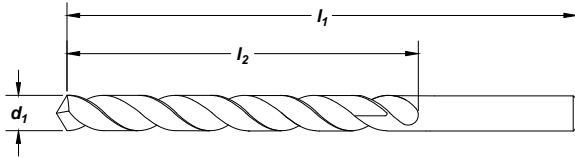

Extra Length

High Speed Steel

Feature:

Extra length for long reach and deeper drilling depth.

drill diameter	decimal	overall length	flute length	order number
d_1	equivalent	l_1	l_2	950E black oxide
3/32	.0938	8.000	5.500	C09655
7/64	.1094	8.000	5.500	C09656
1/8	.1250	8.000	5.500	C09657
1/8	.1250	10.000	7.500	C09707
1/8	.1250	12.000	9.000	C09736
9/64	.1406	8.000	5.500	C09658
5/32	.1562	8.000	5.500	C09659
5/32	.1562	10.000	7.500	C09709
5/32	.1562	12.000	9.000	C09738
11/64	.1719	8.000	5.500	C09660
3/16	.1875	8.000	5.500	C09661
3/16	.1875	10.000	7.500	C09711
3/16	.1875	12.000	9.000	C09740
13/64	.2031	8.000	5.500	C09662
7/32	.2188	8.000	5.500	C09663
7/32	.2188	10.000	7.500	C09713
7/32	.2188	12.000	9.000	C09742
15/64	.2344	8.000	5.500	C09664
15/64	.2344	10.000	7.500	C09714
1/4	.2500	8.000	5.500	C09665
1/4	.2500	10.000	7.500	C09715
1/4	.2500	12.000	9.000	C09744
17/64	.2656	8.000	5.500	C09666
9/32	.2812	8.000	5.500	C09667
9/32	.2812	10.000	7.500	C09717
9/32	.2812	12.000	9.000	C09746
19/64	.2969	8.000	5.500	C09668
5/16	.3125	8.000	5.500	C09669
5/16	.3125	10.000	7.500	C09719
5/16	.3125	12.000	9.000	C09748
21/64	.3281	8.000	5.500	C09670
11/32	.3438	8.000	5.500	C09671
11/32	.3438	10.000	7.500	C09721

continued on next page

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				
Black Oxide	☆			☆				☆	★				
☆ = Best Performance ★ = Acceptable													



Extra Length - General Purpose

Style: **950E** (continued)



Extra Length

High Speed Steel

drill diameter	decimal equivalent	overall length	flute length	order number
d ₁		l ₁	l ₂	950E black oxide
11/32	.3438	12.000	9.000	C09750
23/64	.3594	8.000	5.500	C09672
3/8	.3750	8.000	5.500	C09673
3/8	.3750	10.000	7.500	C09723
3/8	.3750	12.000	9.000	C09752
25/64	.3906	8.000	5.500	C09674
13/32	.4062	8.000	5.500	C09675
13/32	.4062	10.000	7.500	C09725
13/32	.4062	12.000	9.000	C09754
27/64	.4219	8.000	5.500	C09676
7/16	.4375	8.000	5.500	C09677
7/16	.4375	10.000	7.500	C09727
7/16	.4375	12.000	9.000	C09756
29/64	.4531	8.000	5.500	C09678
15/32	.4688	8.000	5.500	C09679
15/32	.4688	10.000	7.500	C09729
15/32	.4688	12.000	9.000	C09758
31/64	.4844	8.000	5.500	C09680
1/2	.5000	8.000	5.500	C09681
1/2	.5000	10.000	7.500	C09731
1/2	.5000	12.000	9.000	C09760
17/32	.5312	10.000	7.500	C09733
17/32	.5312	12.000	9.000	C09762
9/16	.5625	10.000	7.500	C09735
9/16	.5625	12.000	9.000	C09764
19/32	.5938	12.000	9.000	C09766
5/8	.6250	12.000	9.000	C09768
21/32	.6562	12.000	9.000	C09770
11/16	.6875	12.000	9.000	C09772
23/32	.7188	12.000	9.000	C09774
3/4	.7500	12.000	9.000	C09776

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				
Black Oxide		☆		☆				☆	☆				
☆ = Best Performance ◆ = Acceptable													



Taper Shank - Standard, Undersized, & Oversized


Styles: 2410, 2411, 2412

- ♦ Undersized and oversized shank drills available from stock in popular sizes.
- ♦ Operating parameters: See Technical section
- ♦ Morse Taper Shank specs: See Technical section

ASME
B94.11M

HSS

118°

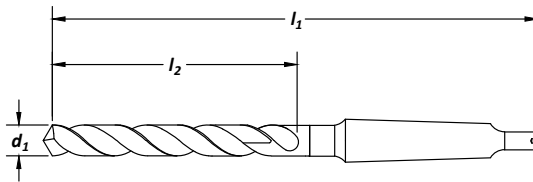Helix
Regular
21° to 34°Taper
ShankSurface
TreatmentBlack
Oxide

Style 2411



Style 2412

Feature:

General purpose use in steel and iron.

drill diameter	decimal	overall length	flute length	morse	order number		
d ₁	equivalent	l ₁	l ₂	taper	2410 standard	2411 undersized	2412 oversized
1/8	.1250	5.125	1.875	1	C12040	—	—
5/32	.1562	5.375	2.125	1	C12052	—	—
3/16	.1875	5.750	2.500	1	C12064	—	—
13/64	.2031	6.000	2.750	1	C12069	—	—
7/32	.2188	6.000	2.750	1	C12075	—	—
15/64	.2344	6.125	2.875	1	C12082	—	—
1/4-E	.2500	6.125	2.875	1	C12091	—	—
17/64	.2656	6.250	3.000	1	C12099	—	—
9/32	.2812	6.250	3.000	1	C12113	—	—
19/64	.2969	6.375	3.125	1	C12117	—	—
5/16	.3125	6.375	3.125	1	C12124	—	—
21/64	.3281	6.500	3.250	1	C12132	—	—
11/32	.3438	6.500	3.250	1	C12139	—	—
23/64	.3594	6.750	3.500	1	C12147	—	—
3/8	.3750	6.750	3.500	1	C12154	—	—
25/64	.3906	7.000	3.625	1	C12162	—	—
13/32	.4062	7.000	3.625	1	C12167	—	—
27/64	.4219	7.250	3.875	1	C12170	—	—
7/16	.4375	7.250	3.875	1	C12173	—	—
29/64	.4531	7.500	4.125	1	C12176	—	—
15/32	.4688	7.500	4.125	1	C12178	—	—
31/64	.4844	8.250	4.375	2	C12181	—	—
1/2	.5000	8.250	4.375	2	C12183	—	—
1/2	.5000	7.750	4.375	1	—	C12483	—
33/64	.5156	8.500	4.625	2	C12186	—	—
17/32	.5312	8.500	4.625	2	C12188	—	—
35/64	.5469	8.750	4.875	2	C12191	—	—
9/16	.5625	8.750	4.875	2	C12194	—	—
37/64	.5781	8.750	4.875	2	C12196	—	—
19/32	.5938	8.750	4.875	2	C12199	—	—
39/64	.6094	8.750	4.875	2	C12201	—	—
5/8	.6250	8.750	4.875	2	C12204	—	—

continued on next page

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	13-38	>38	16-38	> 38	300 Series	400 series		18-22	22-32				
Black Oxide	☆		☆					☆	◆				

☆ = Best Performance

◆ = Acceptable



Taper Shank - Standard, Undersized, & Oversized

Styles: **2410, 2411, 2412** (continued)



Taper Shank

High Speed Steel

drill diameter d₁	decimal equivalent	overall length l₁	flute length l₂	morse taper	2410 standard	order number 2411 undersized	2412 oversized
41/64	.6406	9.000	5.125	2	C12207	—	—
21/32	.6562	9.000	5.125	2	C12209	—	—
43/64	.6719	9.250	5.375	2	C12212	—	—
11/16	.6875	9.250	5.375	2	C12214	—	—
11/16	.6875	10.000	5.375	3	—	—	C12670
45/64	.7031	9.500	5.625	2	C12216	—	—
23/32	.7188	9.500	5.625	2	C12218	—	—
47/64	.7344	9.750	5.875	2	C12220	—	—
3/4	.7500	9.750	5.875	2	C12222	—	—
3/4	.7500	10.500	5.875	3	—	—	C12678
49/64	.7656	9.875	6.000	2	C12223	—	—
25/32	.7812	9.875	6.000	2	C12225	—	—
51/64	.7969	10.750	6.125	3	C12227	—	—
13/16	.8125	10.750	6.125	3	C12229	—	—
53/64	.8281	10.750	6.125	3	C12231	—	—
27/32	.8438	10.750	6.125	3	C12232	—	—
55/64	.8594	10.750	6.125	3	C12234	—	—
7/8	.8750	10.750	6.125	3	C12236	—	—
7/8	.8750	10.000	6.125	2	—	C12505	—
57/64	.8906	10.750	6.125	3	C12238	—	—
29/32	.9062	10.750	6.125	3	C12240	—	—
59/64	.9219	10.750	6.125	3	C12241	—	—
15/16	.9375	10.750	6.125	3	C12243	—	—
31/32	.9688	11.000	6.375	3	C12247	—	—
63/64	.9844	11.000	6.375	3	C12249	—	—
1	1.0000	11.000	6.375	3	C12250	—	—
1	1.0000	12.000	6.375	4	—	—	C12684
1-1/64	1.0156	11.125	6.500	3	C12252	—	—
1-1/32	1.0312	11.125	6.500	3	C12254	—	—
1-1/16	1.0625	11.250	6.625	3	C12257	—	—
1-1/16	1.0625	12.250	6.625	4	—	—	C12691
1-1/8	1.1250	12.750	7.125	4	C12265	—	—
1-1/8	1.1250	11.750	7.125	3	—	C12518	—
1-3/16	1.1875	13.000	7.375	4	C12272	—	—
1-1/4	1.2500	13.500	7.875	4	C12279	—	—
1-1/4	1.2500	12.500	7.875	3	—	C12532	—
1-5/16	1.3125	14.250	8.625	4	C12286	—	—
1-11/32	1.3438	14.375	8.750	4	C12290	—	—
1-3/8	1.3750	14.500	8.875	4	C12293	—	—
1-7/16	1.4375	14.750	9.125	4	C12301	—	—
1-15/32	1.4688	14.875	9.250	4	C12304	—	—
1-1/2	1.5000	15.000	9.375	4	C12308	—	—
1-17/32	1.5312	15.000	9.375	4	—	C12541	—
1-9/16	1.5625	16.625	9.625	5	C12315	—	—
1-5/8	1.6250	17.000	10.000	5	C12322	—	—
1-3/4	1.7500	17.125	10.125	5	C12336	—	—
1-3/4	1.7500	16.250	10.375	4	—	C12566	—
1-7/8	1.8750	17.375	10.375	5	C12351	—	—
2	2.0000	17.375	10.375	5	C12365	—	—

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series		400 series	18-22	22-32	>45		
	Black Oxide	☆		☆				☆	◆				
	☆ = Best Performance ◆ = Acceptable												




- ♦ Operating parameters:
See Technical section

ASME
B94.11M

Carbide

Surface
Treatment

Bright

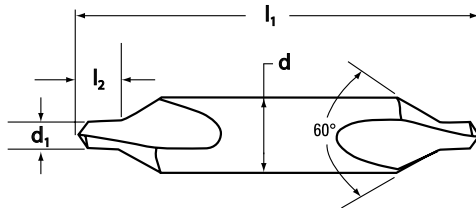

Countersink

Carbide

size number	drill diameter		body diameter	overall length		drill length	order number
	d_1		d	l_1		l_2	1798
	inch	decimal	inch	inch	inch	inch	bright
#1	3/64	.0469	.125	1.500		.0469	C52772
#2	5/64	.0781	.188	2.000		.0781	C52773
#3	7/64	.1094	.250	2.000		.1094	C52774
#4	1/8	.1250	.313	2.125		.1250	C52775
#5	3/16	.1875	.438	2.750		.1875	C52776
#6	7/32	.2188	.500	3.000		.2188	C52777

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	13-38	>38	16-38	> 38	300 Series	400 series		18-22	22-32				>45
Bright	☆	◆	☆	◆	◆	◆		☆	☆	☆			

☆ = Best Performance ◆ = Acceptable




Bell Type Drill & Countersink

Style: 996



- ♦ Bell-type tool forms protected centers.

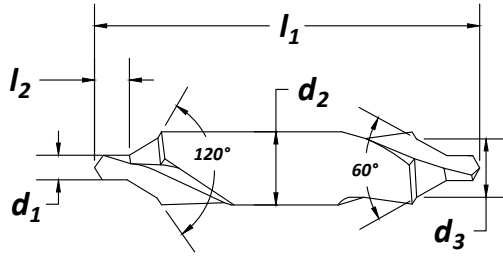

ASME
B94.11M

HSS



Surface
Treatment




Countersink

High Speed Steel

size number	body diameter		drill diameter		bell diameter	overall length	drill length	order number
	d ₂ inch		d ₁ inch	decimal	d ₃ inch	l ₁ inch	l ₂ inch	
#11	.125		3/64	.0469	.100	1.250	.047	C46272
#12	.188		1/16	.0625	.150	1.875	.063	C46273
#13	.250		3/32	.0938	.200	2.000	.094	C46274
#14	.313		7/64	.1094	.250	2.125	.109	C46275
#15	.438		5/32	.1562	.350	2.750	.156	C46276
#16	.500		3/16	.1875	.400	3.000	.188	C46277
#17	.625		7/32	.2188	.500	3.250	.219	C46278
#18	.750		1/4	.2500	.600	3.500	.250	C46279

Plain Drill & Countersink

Style: 998

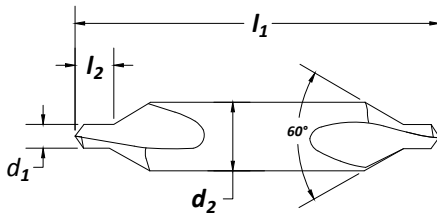

ASME
B94.11M

HSS



Surface
Treatment



size number	body diameter		drill diameter		overall length	drill length	order number
	d ₂ inch		d ₁ inch	decimal	l ₁ inch	l ₂ inch	
#00	.125		.025	.0250	1.250	.030	C46261
#0	.125		1/32	.0312	1.250	.038	C46262
#1	.125		3/64	.0469	1.250	.047	C46263
#2	.188		5/64	.0781	1.875	.078	C46264
#3	.250		7/64	.1094	2.000	.109	C46265
#4	.313		1/8	.1250	2.125	.125	C46266
#5	.438		3/16	.1875	2.750	.188	C46267
#6	.500		7/32	.2188	3.000	.219	C46268
#7	.625		1/4	.2500	3.250	.250	C46269
#8	.750		5/16	.3125	3.500	.313	C46270

SET

Plain Drill & Countersink

Style: 998

no. of pieces	size range	order number
5	#1 through #5	C00944




Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series						
	Bright	☆		☆					☆	☆	☆		

☆ = Best Performance ♦ = Acceptable



- ♦ All dimensions in inches.
- ♦ Many tools are available with additional surface treatments. Please call for a quote.
- ♦ Countersink and deburring tools are simple, all-purpose tools made of Cobalt that provide flawless countersinking and deburring. The chatter-free cutting action requires minimal power. The micro-smooth CNC precision ground construction produces clean, smooth cutting without smearing on a variety of materials. The tool especially excels in countersinking or deburring holes in aluminum, plastics and other nonmetallic.

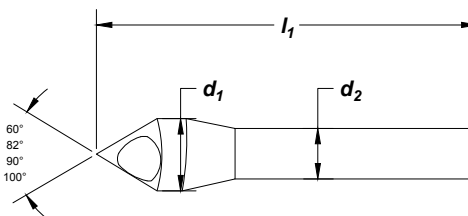M42
CobaltStraight
ShankSurface
Treatment

Bright



♦ Additional View



Countersink

Cobalt

60° Countersink Angle

head diameter	diameter of cut		overall length	shank diameter	order number
d_1	min	max	l_1 (in)	d_2 (in)	3001 bright
5/16	7/64	9/32	1-7/8	1/4	C94560
3/8	5/32	11/32	1-7/8	1/4	C94561
1/2	11/64	29/64	2	5/16	C94562
5/8	3/16	37/64	2-1/2	3/8	C94563
3/4	1/4	45/64	2-3/4	3/8	C94564
1	19/64	27/32	3	3/8	C94565
1-1/4	27/64	1-1/32	3-1/2	1/2	C94566

82° Countersink Angle

head diameter	diameter of cut		overall length	shank diameter	order number
d_1	min	max	l_1 (in)	d_2 (in)	3001 bright
5/16	3/32	9/32	1-5/8	1/4	C94567
3/8	9/64	11/32	1-3/4	1/4	C94568
1/2	5/32	29/64	1-3/4	5/16	C94569
5/8	11/64	37/64	2-1/8	3/8	C94570
3/4	13/64	45/64	2-3/8	3/8	C94571
1	19/64	59/64	2-5/8	3/8	C94572
1-1/4	23/64	1-1/32	3-1/8	1/2	C94573

90° Countersink Angle

head diameter	diameter of cut		overall length	shank diameter	order number
d_1	min	max	l_1 (in)	d_2 (in)	3001 bright
5/16	3/32	9/32	1-5/8	1/4	C94574
3/8	9/64	11/32	1-3/4	1/4	C94575
1/2	5/32	29/64	1-3/4	5/16	C94576
5/8	11/64	37/64	2-1/8	3/8	C94577
3/4	13/64	45/64	2-3/8	3/8	C94578
1	19/64	59/64	2-5/8	3/8	C94579
1-1/4	23/64	1-1/32	3-1/8	1/2	C94580

100° Countersink Angle

head diameter	diameter of cut		overall length	shank diameter	order number
d_1	min	max	l_1 (in)	d_2 (in)	3001 bright
5/16	3/32	9/32	1-5/8	1/4	C94581
3/8	9/64	11/32	1-3/4	1/4	C94582
1/2	5/32	29/64	1-3/4	5/16	C94583
5/8	11/64	37/64	2-1/8	3/8	C94584
3/4	13/64	45/64	2-3/8	3/8	C94585
1	19/64	59/64	2-5/8	3/8	C94586
1-1/4	23/64	1-1/32	3-1/8	1/2	C94587

SET

**Countersink & Deburring
Style: 3001 - 4 pieces**

angle	sizes	order number
60°	5/16, 3/8, 1/2, 5/8 C94560, C94561, C94562, C94563	C94588
82°	5/16, 3/8, 1/2, 5/8 C94567, C94568, C94569, C94570	C94589
90°	5/16, 3/8, 1/2, 5/8 C94574, C94575, C94576, C94577	C94590
100°	5/16, 3/8, 1/2, 5/8 C94581, C94582, C94583, C94584	C94591

SET

**Countersink & Deburring
Style: 3001 - 5 pieces**

angle	sizes	order number
60°	5/16, 3/8, 1/2, 3/4, 1 C94560, C94561, C94562, C94564, C94565	C94592
82°	5/16, 3/8, 1/2, 3/4, 1 C94567, C94568, C94569, C94571, C94572	C94593
90°	5/16, 3/8, 1/2, 3/4, 1 C94574, C94575, C94576, C94578, C94579	C94594
100°	5/16, 3/8, 1/2, 3/4, 1 C94581, C94582, C94583, C94585, C94586	C94595

Material Reference	Steel (HRC)				Stainless Steel		Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular	Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series					>45
	Bright	☆		☆		♦				☆		

☆ = Best Performance ♦ = Acceptable



Spotting and Centering - Short


Style: 995



Spotting / Centering / Drift

High Speed Steel

- ♦ Operating parameters:
See Technical section

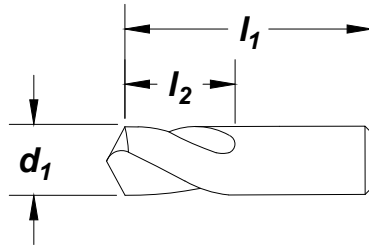

drill diameter	decimal equivalent	overall length	flute length	order number
d_1		l_1 (in)	l_2 (in)	995
3/8	.3750	2.000	1.000	C11739
1/2	.5000	2.000	1.000	C11757
5/8	.6250	2.250	1.125	C11771
3/4	.7500	2.250	1.125	C11782
1	1.0000	2.500	1.250	C11796



TECH TIP

USING SPOTTING AND CENTERING DRILLS

- Use these drills to get true and accurate centers.
- There is no body clearance on these drills to allow chucking close to the point. This features helps to maintain drill accuracy for centering.



TECH TIP


POINT ANGLE: 90° VERSUS 120°

- Use the 90° point spotting drill for a 118° point following drill.
- Use the 120° point spotting drill for a 135° point following drill.

Spotting and Centering - Long

Style: 1799

- ♦ Operating parameters:
See Technical section

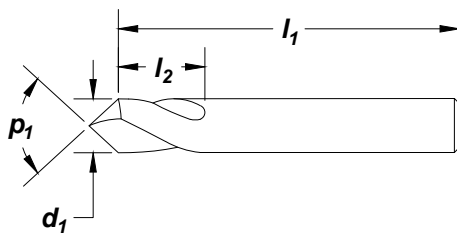

drill diameter	decimal equivalent	overall length	flute length	order number		
				p_1 - point angle		
d_1		l_1 (in)	l_2 (in)	90°	120°	142°
1/8	0.1250	2	3/8	C46400	C46401	C46402
3/16	0.1875	3	3/4	C46403	C46404	C46405
1/4	0.2500	3	3/4	C46406	C46407	C46408
5/16	0.3125	2 1/2	1	C46409	C46410	C46411
3/8	0.3750	3	1	C46412	C46413	C46414
1/2	0.5000	4	1	C46415	C46416	C46417

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series						>45
	AlTiN	☆		☆				☆	☆	♦			

☆ = Best Performance

♦ = Acceptable




♦ Operating parameters:
See Technical section

ASME
B94.11M

M42
Cobalt



Surface
Treatment

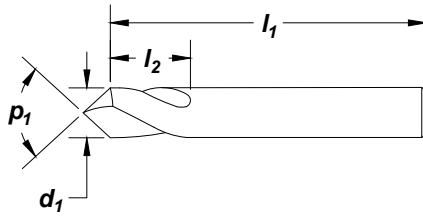

drill diameter d_1	decimal equivalent	overall length l_1 (in)	flute length l_2 (in)	order number p_1 - point angle	
				90°	120°
1/4	.2500	2.500	1.000	C26167	C26174
3/8	.3750	3.125	1.125	C26168	C26175
1/2	.5000	3.750	1.500	C26169	C26176
5/8	.6250	4.250	1.625	C26170	C26177
3/4	.7500	5.000	1.750	C26171	C26178
1	1.0000	6.000	1.750	C26172	C26179


NC Spotting & Centering - Long
Style: 2646

ASME
B94.11M

M42
Cobalt



Surface
Treatment

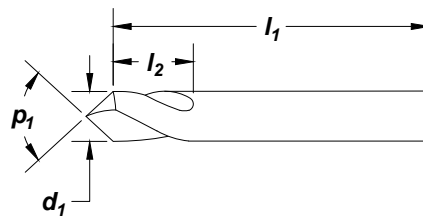

drill diameter d_1	decimal equivalent	overall length l_1 (in)	flute length l_2 (in)	order number p_1 - point angle	
				90°	120°
1/4	.2500	4.000	1.000	C26181	C26188
3/8	.3750	5.000	1.125	C26182	C26189
1/2	.5000	6.000	1.500	C26183	C26190
5/8	.6250	7.125	1.625	C26184	C26191
3/4	.7500	8.000	1.750	C26185	C26192
1	1.0000	8.000	1.750	C26186	C26193

NC Spotting & Centering - Short and Long
Style: 2636, 2646
SET


number of pieces	point angle	size range	order number	
			2636	2646
6	90°	1/4" through 1"	C26173	C26187
6	120°	1/4" through 1"	C26180	C26194

6-Piece Set
#C26173




Material Reference	Steel (HRC)				Stainless Steel		Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				>45
Hardness	☆		☆		☆		☆	☆	☆	♦		
Straw	☆		☆		☆		☆	☆	☆	♦		

☆ = Best Performance ♦ = Acceptable

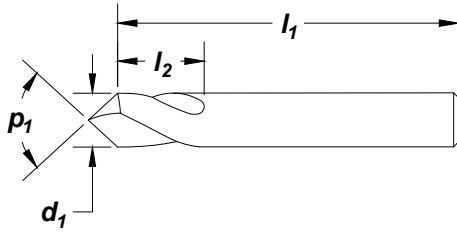**NC Spotting & Centering - Short**
Style: **2635**♦ Operating parameters:
See Technical sectionSurface
Treatment

drill diameter d₁	decimal equivalent	overall length l₁ (in)	flute length l₂ (in)	order number p₁ - point angle	
				90°	120°
1/4	.2500	2.500	1.000	C24167	C24174
3/8	.3750	3.125	1.125	C24168	C24175
1/2	.5000	3.750	1.500	C24169	C24176
5/8	.6250	4.250	1.625	C24170	C24177
3/4	.7500	5.000	1.750	C24171	C24178
1	1.0000	6.000	1.750	C24172	C24179

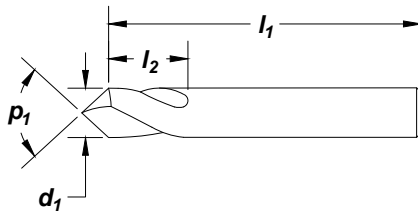NC Spotting & Centering - Long
Style: **2645**

drill diameter d₁	decimal equivalent	overall length l₁ (in)	flute length l₂ (in)	order number p₁ - point angle	
				90°	120°
1/4	.2500	4.000	1.000	C24181	C24188
3/8	.3750	5.000	1.125	C24182	C24189
1/2	.5000	6.000	1.500	C24183	C24190
5/8	.6250	7.125	1.625	C24184	C24191
3/4	.7500	8.000	1.750	C24185	C24192
1	1.0000	8.000	1.750	C24186	C24193

SET**NC Spotting & Centering - Short and Long**
Style: **2635, 2645**

number of pieces	point angle	size range	order number	
			2635	2645
6	90°	1/4" through 1"	C24173	C24187
6	120°	1/4" through 1"	C24180	C24194




6-Piece Set #C24187

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series						
	Bright	☆		☆		♦			☆	☆	☆		>45

☆ = Best Performance

♦ = Acceptable

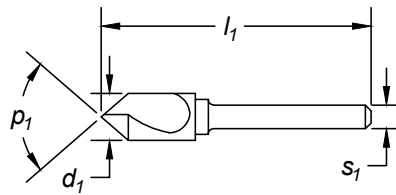


Carbide

Surface
Treatment

Bright



tool diameter d_1 (in)		shank diameter s_1 (in)	overall length l_1 (in)	order number p_1 - point angle		
fraction	decimal			60° angle	82° angle	90° angle
1/8	.1250	1/8	1-1/2	C46320	C46328	C46336
3/16	.1875	3/16	2	C46321	C46329	C46337
1/4	.2500	1/4	2	C46322	C46330	C46338
3/8	.3750	1/4	2-5/8	C46323	C46331	C46339
1/2	.5000	1/4	2-7/8	C46324	C46332	C46340
5/8	.6250	3/8	3	C46325	C46333	C46341
3/4	.7500	1/2	3	C46326	C46334	C46342
1	1.000	1/2	2-3/4	C46327	C46335	C46343

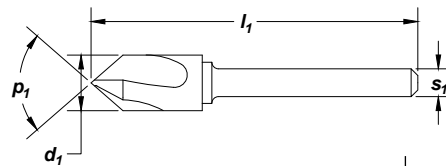3 Flute - Carbide Countersink
Style: 110C3



Carbide

Surface
Treatment

Bright



tool diameter d_1 (in)		shank diameter s_1 (in)	overall length l_1 (in)	order number p_1 - point angle		
fraction	decimal			60° angle	82° angle	90° angle
1/8	.1250	1/8	1-1/2	C46344	C46352	C46360
3/16	.1875	3/16	2	C46345	C46353	C46361
1/4	.2500	1/4	2	C46346	C46354	C46362
3/8	.3750	1/4	2-5/8	C46347	C46355	C46363
1/2	.5000	1/4	2-7/8	C46348	C46356	C46364
5/8	.6250	3/8	3	C46349	C46357	C46365
3/4	.7500	1/2	3	C46350	C46358	C46366
1	1.000	1/2	2-3/4	C46351	C46359	C46367

6 Flute - Carbide Countersink
Style: 110C6


Carbide

Surface
Treatment

Bright



tool diameter d_1 (in)		shank diameter s_1 (in)	overall length l_1 (in)	order number p_1 - point angle		
fraction	decimal			60° angle	82° angle	90° angle
1/8	.1250	1/8	1-1/2	C46368	C46376	C46384
3/16	.1875	3/16	2	C46369	C46377	C46385
1/4	.2500	1/4	2	C46370	C46378	C46386
3/8	.3750	1/4	2-5/8	C46371	C46379	C46387
1/2	.5000	1/4	2-7/8	C46372	C46380	C46388
5/8	.6250	3/8	3	C46373	C46381	C46389
3/4	.7500	1/2	3	C46374	C46382	C46390
1	1.000	1/2	2-3/4	C46375	C46383	C46391

Material Reference	Steel (HRC)				Stainless Steel		Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	PH	18-22	22-32		>45
Bright	◆			☆					☆	☆		

☆ = Best Performance

◆ = Acceptable




Single Flute Countersink

Style: 10001



♦ Operating parameters:
See Technical section

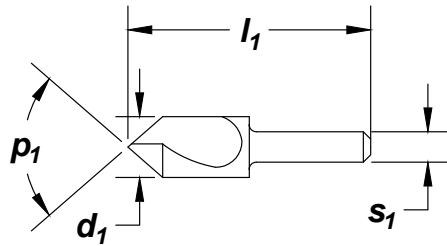

HSS

Surface
Treatment


Countersink

High Speed Steel

tool diameter d ₁ (in)		shank diameter s ₁ (in)	overall length l ₁ (in)	order number p ₁ - point angle				
fraction	decimal			60° angle	82° angle	90° angle	100° angle	120° angle
1/4	.2500	.188	1.500	C46101	C46102	C46103	C46104	C46106
3/8	.3750	.250	1.750	C46107	C46108	C46109	C46110	C46112
1/2	.5000	.250	2.000	C46113	C46114	C46115	C46116	C46118
5/8	.6250	.375	2.250	C46119	C46120	C46121	C46122	C46123
3/4	.7500	.500	2.625	C46124	C46125	C46126	C46127	C46129
1	1.0000	.500	2.750	C46130	C46131	C46132	C46133	C46135
1-1/4	1.2500	.500	2.750	C46136	C46137	C46138	—	—
1-1/2	1.5000	.750	2.875	C46141	C46139	C46140	—	—
2	2.0000	.750	3.250	C46142	—	C46143	—	—

3 Flute Countersink

Style: 10003

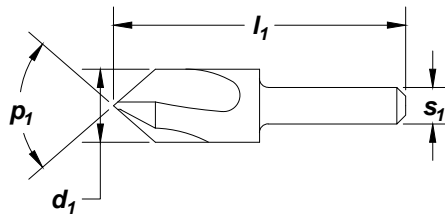

HSS

Surface
Treatment

tool diameter d ₁ (in)		shank diameter s ₁ (in)	overall length l ₁ (in)	order number p ₁ - point angle				
fraction	decimal			60° angle	82° angle	90° angle	100° angle	120° angle
1/4	.2500	.188	1.500	C46150	C46151	C46152	C46153	C46155
3/8	.3750	.250	1.750	C46156	C46157	C46158	C46159	C46161
1/2	.5000	.250	2.000	C46162	C46163	C46164	C46165	C46167
5/8	.6250	.375	2.250	C46168	C46169	C46170	C46171	C46173
3/4	.7500	.500	2.625	C46174	C46175	C46176	C46177	C46179
1	1.0000	.500	2.750	C46180	C46181	C46182	C46183	C46185
1-1/4	1.2500	.500	2.750	C46186	C46187	C46188	—	—
1-1/2	1.5000	.750	2.875	C46189	C46190	C46191	—	—
2	2.0000	.750	3.250	—	—	C46192	—	—

SET

Countersink Sets - Single flute and 3 flute

Style: 10001, 10003




number of pieces	angle	size range	order number	
			10001	10003
5	60°	1/4" through 3/4" x 1/8"	C00970	C00972
5	82°	1/4" through 3/4" x 1/8"	C00971	C00973

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series						>45
Black Oxide		☆		♦				☆	☆				

☆ = Best Performance ♦ = Acceptable

Surface
Treatment

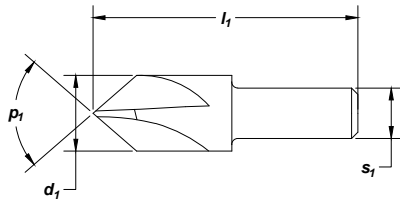 Black
Oxide


tool diameter d_1 (in)		shank diameter s_1 (in)	overall length l_1 (in)	order number p_1 - point angle			
fraction	decimal			60° angle	82° angle	90° angle	100° angle
1/4	.2500	.188	1.500	C46198	C46199	C46200	C46201
3/8	.3750	.250	1.750	C46204	C46205	C46206	C46207
1/2	.5000	.375	2.000	C46210	C46211	C46212	C46213
5/8	.6250	.375	2.250	C46216	C46217	C46218	C46219
3/4	.7500	.500	2.625	C46222	C46223	C46224	C46225

Countersink

High Speed Steel

4 Flute Center - Reamer / Countersink

Style: 610

SET

number of pieces	angle	size range	order number 610
5	82°	1/4"-3/4" x 1/8"	C00969



Drift Drill

Style: 105

Surface
Treatment

Bright



fits morse taper socket or sleeve	order number 105
#1	C53665
#2	C53666
#3	C53667
#4	C53668



TECH TIPS

USING DRILL DRIFTS

- Used to remove taper shank drills and tapered sockets from the spindle or from holders.

Straight Shank & Flute - *Chucking*Styles: **1730**

CLEVELAND



WALTER

- ♦ Operating parameters:
See Technical section


ANSI
SIZES

Carbide

Surface
Treatment

Reamers

Carbide

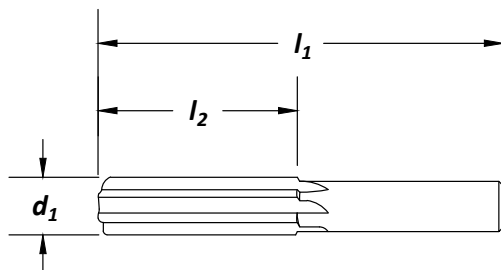**Feature:**

- ♦ High red hardness for extended wear life in high heat conditions.

reamer diameter d₁ (in)	decimal equivalent	shank diameter	overall length l₁ (in)	flute length l₂ (in)	number of flutes	order number 1730
1/16	.0625	.058	1.500	.375	4	C50103
3/32	.0938	.088	2.000	.500	4	C50121
1/8	.1250	.120	2.250	.625	4	C50133
5/32	.1562	.151	2.500	.750	4	C50145
3/16	.1875	.182	2.750	.875	4	C50157
7/32	.2188	.213	3.000	1.000	4	C50168
1/4	.2500	.244	3.000	1.000	4	C50180
9/32	.2812	.270	3.250	1.125	6	C50194
5/16	.3125	.301	3.250	1.125	6	C50203
11/32	.3438	.332	3.500	1.250	6	C50214
3/8	.3750	.363	3.500	1.250	6	C50226

**TECH TIPS****HOW TO SELECT THE CORRECT REAMER STYLE**

- Straight flute reamers, styles 4001, 4005, 1730, and 4703, are for use in through hole applications.
- Spiral flute reamers, style 4030, are for use in blind holes. They produce a smoother finish than straight flute reamers.
- Use reamer style 616, bridge reamer and style 618, car reamer, for aligning misaligned holes.
- Style 642 taper pipe reamers are used to ream a tapered hole before tapping only in soft, stringy materials.
- High spiral Taper Pin Reamers, style 650 are used to produce taper pin holes; the high spiral prevents chip packing.
- Taper pin reamers styles 657 and 659 are used to produce taper pin holes primarily by hand reaming; drill the starting hole a few thousandths of an inch smaller than the desired small diameter of the finished hole.

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series		18-22	22-32			>45
	Bright	☆	◆	☆	◆	☆	☆		☆	☆	☆		


☆ = Best Performance ◆ = Acceptable



- ♦ Custom reamer dimensions shown in Technical Section.
- ♦ Operating parameters: See Technical section

ASME
B94.2DIN
338

HSS

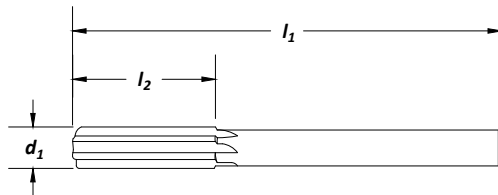Surface
Treatment

Reamers

High Speed Steel

reamer diameter d_1			decimal equivalent	overall length l_1 (in)		flute length l_2 (in)		number of flutes	order number 4001
inch	wire	metric		inch	mm	inch	mm		
	60		.0400	2.500		.500		4	C25003
	59		.0410	2.500		.500		4	C25005
	58		.0420	2.500		.500		4	C25008
	57		.0430	2.500		.500		4	C25010
	56		.0465	2.500		.500		4	C25019
3/64			.0469	2.500		.500		4	C25020
	55		.0520	2.500		.500		4	C25034
	54		.0550	2.500		.500		4	C25041
		1.5	.0591		63.50		12.70	4	C25059
	53		.0595	2.500		.500		4	C25053
1/16			.0625	2.500		.500		4	C25060
	52		.0635	2.500		.500		4	C25063
	51		.0670	3.000		.750		4	C25072
	50		.0700	3.000		.750		4	C25079
	49		.0730	3.000		.750		4	C25087
	48		.0760	3.000		.750		4	C25094
5/64			.0781	3.000		.750		4	C25100
	47		.0785	3.000		.750		4	C25101
		2.0	.0787		76.20		19.05	4	C25095
	46		.0810	3.000		.750		4	C25108
	45		.0820	3.000		.750		4	C25110
	44		.0860	3.000		.750		4	C25120
	43		.0890	3.000		.750		4	C25128
	42		.0935	3.000		.750		4	C25139
3/32			.0938	3.000		.750		4	C25140
	41		.0960	3.500		.875		4	C25146
	40		.0980	3.500		.875		4	C25151
	39		.0995	3.500		.875		4	C25155
	38		.1015	3.500		.875		4	C25159
	37		.1040	3.500		.875		4	C25165
	36		.1065	3.500		.875		4	C25171
7/64			.1094	3.500		.875		4	C25178
	35		.1100	3.500		.875		4	C25180
	34		.1110	3.500		.875		4	C25183
	33		.1130	3.500		.875		4	C25187
	32		.1160	3.500		.875		4	C25194
		3.0	.1181		88.90		22.23	4	C25185
	31		.1200	3.500		.875		4	C25203

*dowel pin reamer tolerance $+.0000/-0.0002$

continued on next page

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	>38	300 Series	400 series	18-22	22-32				
Bright	☆			☆		☆		☆	♦	☆			

☆ = Best Performance

♦ = Acceptable

Straight Shank & Flute - *Chucking*Styles: **4001** (continued)

Reamers

High Speed Steel

reamer diameter			decimal equivalent	overall length		flute length		number of flutes	order number 4001
inch	d ₁ wire	metric		inch l ₁ (in)	mm	inch l ₂ (in)	mm		
1230*			.1230	3.500		.875		4	*C25210
.1240			.1240	3.500		.875		4	C25212
.1247*			.1247	3.500		.875		4	*C25215
1/8			.1250	3.500		.875		4	C25216
.1260			.1260	3.500		.875		4	C25220
	30		.1285	3.500		.875		4	C25226
	29		.1360	4.000		1.000		4	C25243
	28		.1405	4.000		1.000		4	C25253
9/64			.1406	4.000		1.000		4	C25254
	27		.1440	4.000		1.000		4	C25262
	26		.1470	4.000		1.000		4	C25269
	25		.1495	4.000		1.000		4	C25275
	24		.1520	4.000		1.000		4	C25281
	23		.1540	4.000		1.000		4	C25285
5/32			.1562	4.000		1.000		4	C25290
	22		.1570	4.000		1.000		6	C25292
		4.0	.1575		101.60		25.40	6	C25291
	21		.1590	4.500		1.125		6	C25297
	20		.1610	4.500		1.125		6	C25301
	19		.1660	4.500		1.125		6	C25313
	18		.1695	4.500		1.125		6	C25322
11/64			.1719	4.500		1.125		6	C25327
	17		.1730	4.500		1.125		6	C25330
	16		.1770	4.500		1.125		6	C25339
	15		.1800	4.500		1.125		6	C25346
	14		.1820	4.500		1.125		6	C25351
	13		.1850	4.500		1.125		6	C25357
1855*			.1855	4.500		1.125		6	*C25360
.1865			.1865	4.500		1.125		6	C25362
.1870*			.1870	4.500		1.125		6	*C25365
3/16			.1875	4.500		1.125		6	C25366
.1885			.1885	4.500		1.125		6	C25368
	12		.1890	4.500		1.125		6	C25369
	11		.1910	5.000		1.250		6	C25374
	10		.1935	5.000		1.250		6	C25380
	9		.1960	5.000		1.250		6	C25385
		5.0	.1969		127.00		31.75	6	C25314
	8		.1990	5.000		1.250		6	C25392
	7		.2010	5.000		1.250		6	C25397
13/64			.2031	5.000		1.250		6	C25402
	6		.2040	5.000		1.250		6	C25404
	5		.2055	5.000		1.250		6	C25408
	4		.2090	5.000		1.250		6	C25417
	3		.2130	5.000		1.250		6	C25426
7/32			.2188	5.000		1.250		6	C25438
	2		.2210	6.000		1.500		6	C25443
	1		.2280	6.000		1.500		6	C25459
	A		.2340	6.000		1.500		6	C25473
15/64			.2344	6.000		1.500		6	C25474
		6.0	.2362		152.40		38.10	6	C25475
	B		.2380	6.000		1.500		6	C25483
	C		.2420	6.000		1.500		6	C25492
	D		.2460	6.000		1.500		6	C25501
2480*			.2480	6.000		1.500		6	*C25508
.2490			.2490	6.000		1.500		6	C25510
.2495*			.2495	6.000		1.500		6	*C25512
1/4	E		.2500	6.000		1.500		6	C25513
.2510			.2510	6.000		1.500		6	C25516

*dowel pin reamer tolerance +.0000/- .0002

continued on next page



reamer diameter			decimal equivalent	overall length		flute length		number of flutes	order number 4001
inch	d ₁ wire	metric		inch l ₁ (in)	mm	inch l ₂ (in)	mm		
17/64	F		.2570	6.000		1.500		6	C25530
	G		.2610	6.000		1.500		6	C25539
			.2656	6.000		1.500		6	C25550
	H		.2660	6.000		1.500		6	C25552
	I		.2720	6.000		1.500		6	C25566
		7.0	.2756		152.40		38.10	6	C25567
	J		.2770	6.000		1.500		6	C25577
	K		.2810	6.000		1.500		6	C25585
9/32			.2812	6.000		1.500		6	C25608
	L		.2900	6.000		1.500		6	C25605
	M		.2950	6.000		1.500		6	C25617
19/64			.2969	6.000		1.500		6	C25622
	N		.3020	6.000		1.500		6	C25634
.3105*			.3105	6.000		1.500		6	*C25655
.3115			.3115	6.000		1.500		6	C25658
.3120*			.3120	6.000		1.500		6	*C25660
5/16			.3125	6.000		1.500		6	C25661
.3135			.3135	6.000		1.500		6	C25663
		8.0	.3150		152.40		38.10	6	C25668
	O		.3160	6.000		1.500		6	C25669
	P		.3230	6.000		1.500		6	C25685
21/64			.3281	6.000		1.500		6	C25698
	Q		.3320	6.000		1.500		6	C25707
	R		.3390	6.000		1.500		6	C25723
11/32			.3438	6.000		1.500		6	C25733
	S		.3480	7.000		1.750		6	C25742
		9.0	.3543		177.80		44.45	6	C25743
	T		.3580	7.000		1.750		6	C25764
23/64			.3594	7.000		1.750		6	C25768
	U		.3680	7.000		1.750		6	C25789
.3730*			.3730	7.000		1.750		6	*C25801
.3740			.3740	7.000		1.750		6	C25804
.3745*			.3745	7.000		1.750		6	*C25806
3/8			.3750	7.000		1.750		6	C25807
.3760			.3760	7.000		1.750		6	C25809
	V		.3770	7.000		1.750		6	C25811
	W		.3860	7.000		1.750		6	C25833
25/64			.3906	7.000		1.750		6	C25844
		10.0	.3937		177.80		44.45	6	C25845
	X		.3970	7.000		1.750		6	C25858
	Y		.4040	7.000		1.750		6	C25873
13/32			.4062	7.000		1.750		6	C25878
	Z		.4130	7.000		1.750		6	C25892
27/64			.4219	7.000		1.750		6	C25911
		11.0	.4331		177.80		44.45	6	C25912
.4355*			.4355	7.000		1.750		6	*C25942
.4365			.4365	7.000		1.750		6	C25944
.4370*			.4370	7.000		1.750		6	*C25946
7/16			.4375	7.000		1.750		6	C25947
.4385			.4385	7.000		1.750		6	C25949
29/64			.4531	7.000		1.750		6	C25981

*dowel pin reamer tolerance +.0000/-.0002

continued on next page

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				>45
	Bright	☆		☆		☆		☆	◆	☆			
☆ = Best Performance ◆ = Acceptable													



Straight Shank & Flute - Chucking

Styles: **4001** (continued)



Reamers

High Speed Steel

reamer diameter			decimal equivalent	overall length l ₁ (in)		flute length l ₂ (in)		number of flutes	order number 4001
inch	d ₁ wire	metric		inch	mm	inch	mm		
15/32			.4688	7.000		1.750		6	C26014
		12.0	.4724		203.20		50.80	6	C26015
31/64			.4844	8.000		2.000		6	C26048
.4990*			.4990	8.000		2.000		6	*C26080
1/2			.5000	8.000		2.000		6	C26083
.5010*			.5010	8.000		2.000		8	*C26085
		13.0	.5118		203.20		50.80	8	C26086
17/32			.5312	8.000		2.000		8	C26150
		14.0	.5512		203.20		50.80	8	C26151
9/16			.5625	8.000		2.000		8	C26217
		15.0	.5906		203.20		50.80	8	C26218
19/32			.5938	8.000		2.000		8	C26284
5/8			.6250	9.000		2.250		8	C26351
		16.0	.6299		228.60		57.15	8	C26352
21/32			.6562	9.000		2.250		8	C26418
11/16			.6875	9.000		2.250		8	C26485
23/32			.7188	9.000		2.250		8	C26550
3/4			.7500	9.500		2.500		8	C26615
25/32			.7812	9.500		2.500		8	C26680
13/16			.8125	9.500		2.500		8	C26746
27/32			.8438	9.500		2.500		8	C26811
7/8			.8750	10.000		2.625		8	C26876
29/32			.9062	10.000		2.625		8	C26941
15/16			.9375	10.000		2.625		8	C27006
31/32			.9688	10.000		2.625		8	C27072
1			1.0000	10.500		2.750		8	C27137
1-1/16			1.0625	10.500		2.750		10	C27144
1-1/8			1.1250	11.000		2.875		10	C27152
1-3/16			1.1875	11.000		2.875		10	C27159
1-1/4			1.2500	11.500		3.000		10	C27166
1-3/8			1.3750	12.000		3.250		10	C27180
1-1/2			1.5000	12.500		3.500		12	C27195

*dowel pin reamer tolerance $+.0000/-0.0002$

SET

Straight Shank & Flute - Chucking

Styles: **4001** (continued)

number of pieces	surface treatment	size range	order number 4001
29	bright	1/16" through 1/2" x 1/64"	C00964



Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				>45
	Bright	☆		☆		☆		☆	◆	☆			


☆ = Best Performance ◆ = Acceptable



- ♦ Custom reamer dimensions shown in Technical Section.
- ♦ Operating parameters: See Technical section

ASME
B94.2

HSS

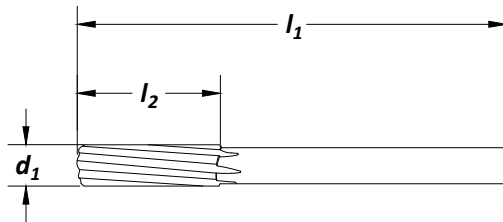Surface
Treatment

Reamers

High Speed Steel

reamer diameter d₁ (in)	decimal equivalent	overall length l₁ (in)	flute length l₂ (in)	number of flutes	order number 4030
1/16	.0625	2.500	.500	4	C29273
5/64	.0781	3.000	.750	4	C29311
3/32	.0938	3.000	.750	4	C29350
7/64	.1094	3.500	.875	4	C29386
1/8	.1250	3.500	.875	6	C29421
9/64	.1406	4.000	1.000	6	C29457
5/32	.1562	4.000	1.000	6	C29493
3/16	.1875	4.500	1.125	6	C29565
13/64	.2031	5.000	1.250	6	C29601
7/32	.2188	5.000	1.250	6	C29637
1/4	.2500	6.000	1.500	6	C29709
17/64	.2656	6.000	1.500	6	C29745
9/32	.2812	6.000	1.500	6	C29803
5/16	.3125	6.000	1.500	6	C29853
21/64	.3281	6.000	1.500	6	C29890
11/32	.3438	6.000	1.500	6	C29925
23/64	.3594	7.000	1.750	6	C29960
3/8	.3750	7.000	1.750	6	C29997
25/64	.3906	7.000	1.750	6	C30033
13/32	.4062	7.000	1.750	6	C30067
7/16	.4375	7.000	1.750	6	C30134
29/64	.4531	7.000	1.750	6	C30168
15/32	.4688	7.000	1.750	6	C30201
31/64	.4844	8.000	2.000	6	C30235
1/2	.5000	8.000	2.000	6	C30268
17/32	.5312	8.000	2.000	8	C30335
9/16	.5625	8.000	2.000	8	C30402
19/32	.5938	8.000	2.000	8	C30469
5/8	.6250	9.000	2.250	8	C30536
21/32	.6562	9.000	2.250	8	C30603
11/16	.6875	9.000	2.250	8	C30670
23/32	.7188	9.000	2.250	8	C30735
3/4	.7500	9.500	2.500	8	C30800
25/32	.7812	9.500	2.500	8	C30865
13/16	.8125	9.500	2.500	8	C30931
7/8	.8750	10.000	2.625	8	C31061
15/16	.9375	10.000	2.625	8	C31191
1	1.0000	10.500	2.750	8	C31322
1-1/8	1.1250	11.000	2.875	10	C31337
1-1/4	1.2500	11.500	3.000	10	C31351
1-3/8	1.3750	12.000	3.250	10	C31365
1-1/2	1.5000	12.500	3.500	12	C31380

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32	☆			>45
	Bright	☆		☆		☆		☆	♦	☆			

☆ = Best Performance ♦ = Acceptable



HOLEMAKING

Go To: [TABLE OF CONTENTS](#) All Products: www.gfii.com/literature/cleveland

Taper Shank, Straight Flute - Chucking

Styles: **4005**




- Custom reamer dimensions shown in Technical Section.
- Operating parameters: See Technical section

ANSI
SIZES

HSS



Surface
Treatment

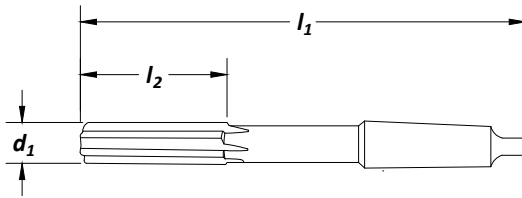

Reamers

High Speed Steel

reamer diameter d₁ (in)	decimal equivalent	overall length l₁ (in)	flute length l₂ (in)	morse taper	number of flutes	order number 4005
1/4	.2500	6.000	1.500	1	6	C33842
5/16	.3125	6.000	1.500	1	6	C33986
3/8	.3750	7.000	1.750	1	6	C34129
7/16	.4375	7.000	1.750	1	6	C34266
1/2	.5000	8.000	2.000	1	6	C34400
17/32	.5312	8.000	2.000	1	6	C34467
9/16	.5625	8.000	2.000	1	8	C34534
19/32	.5938	8.000	2.000	1	8	C34601
5/8	.6250	9.000	2.250	2	8	C34668
21/32	.6562	9.000	2.250	2	8	C34735
11/16	.6875	9.000	2.250	2	8	C34802
23/32	.7188	9.000	2.250	2	8	C34867
3/4	.7500	9.500	2.500	2	8	C34932
25/32	.7812	9.500	2.500	2	8	C34997
13/16	.8125	9.500	2.500	2	8	C35063
27/32	.8438	9.500	2.500	2	8	C35128
7/8	.8750	10.000	2.625	2	8	C35193
29/32	.9062	10.000	2.625	2	8	C35258
15/16	.9375	10.000	2.625	3	8	C35323
31/32	.9688	10.000	2.625	3	8	C35389
1"	1.0000	10.500	2.750	3	8	C35454
1-1/16	1.0625	10.500	2.750	3	10	C35461
1-1/8	1.1250	11.000	2.875	3	10	C35469
1-3/16	1.1875	11.000	2.875	3	10	C35476
1-1/4	1.2500	11.500	3.000	4	10	C35483
1-5/16	1.3125	11.500	3.000	4	10	C35490
1-3/8	1.3750	12.000	3.250	4	10	C35497
1-7/16	1.4375	12.000	3.250	4	10	C35505
1-1/2	1.5000	12.500	3.500	4	12	C35512

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				>45
Bright		☆		☆		☆		☆	◆	☆			

☆ = Best Performance ◆ = Acceptable



Straight Shank and Flute - *Chucking* - Carbide-Tipped Styles: 4703

- ♦ Run at carbide speeds.
- ♦ HSS shank and body for extra strength.
- ♦ Operating parameters:
See Technical section


ANSI
SIZES

HSS

Thru Holes

Straight
FluteStraight
ShankSurface
Treatment

Bright

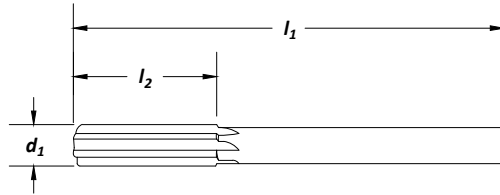

Reamers

High Speed Steel

reamer diameter d_1 (in)	decimal equivalent	shank diameter	overall length l_1 (in)	flute length l_2 (in)	number of flutes	order number 4703
1/4	.2500	.2405	6.000	1.500	4	C50368
9/32	.2812	.2485	6.000	1.500	4	C50382
5/16	.3125	.2792	6.000	1.500	4	C50391
11/32	.3438	.2792	6.000	1.500	4	C50402
3/8	.3750	.3105	7.000	1.750	4	C50414
13/32	.4062	.3105	7.000	1.750	4	C50423
7/16	.4375	.3730	7.000	1.750	6	C50428
15/32	.4688	.3730	7.000	1.750	6	C50433
1/2	.5000	.4355	8.000	2.000	6	C50438
17/32	.5312	.4355	8.000	2.000	6	C50443
9/16	.5625	.4355	8.000	2.000	6	C50449
5/8	.6250	.5620	9.000	2.250	6	C50459

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series		400 series	18-22	22-32	>45		
	Bright	☆	◆	☆	◆	☆	◆	◆	☆	◆	☆		
☆ = Best Performance ◆ = Acceptable													




Taper Shank Bridge Reamer

Style: 616

♦ Operating parameters:
See Technical sectionANSI
SIZES

HSS

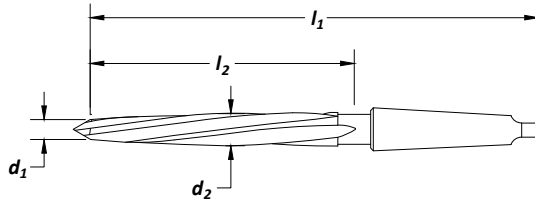LHS /
RHCTaper
ShankSurface
TreatmentBlack
Oxide

Reamers

High Speed Steel


reamer diameter d₂ (in)	decimal equiv.	small end dia. d₁ (in)	overall length l₁ (in)	flute length l₂ (in)	morse taper	number of flutes	order number 616
7/16	.4375	.266	8.250	4.375	2	4	C23812
1/2	.5000	.313	9.000	5.125	2	4	C23813
9/16	.5625	.375	9.000	5.125	2	4	C23814
5/8	.6250	.391	10.000	6.125	2	4	C23815
11/16	.6875	.406	11.750	7.125	3	4	C23816
3/4	.7500	.469	12.000	7.375	3	4	C23817
13/16	.8125	.547	12.000	7.375	3	4	C23818
7/8	.8750	.609	12.000	7.375	3	4	C23819
15/16	.9375	.672	12.000	7.375	3	4	C23820
1	1.0000	.734	12.000	7.375	3	4	C23821
1-1/16	1.0625	.813	12.000	7.375	3	4	C23822
1-1/8	1.1250	.859	12.000	7.375	3	4	C23823
1-3/16	1.1875	.922	12.000	7.375	3	4	C23824

Taper Shank Car Reamer

Style: 618

♦ Operating parameters:
See Technical sectionANSI
SIZES

HSS

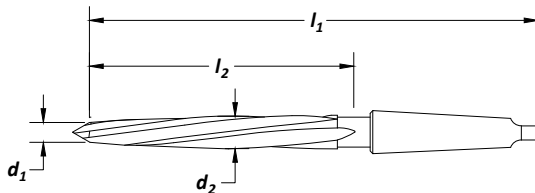LHS /
RHCTaper
ShankSurface
TreatmentBlack
Oxide

reamer diameter d₂ (in)	decimal equiv.	small end dia. d₁ (in)	overall length l₁ (in)	flute length l₂ (in)	morse taper	number of flutes	order number 618
9/16	.5625	0.313	7.563	3.938	2	5	C23957
5/8	.6250	0.328	8.063	4.438	2	5	C23958
11/16	.6875	0.359	8.813	4.438	3	5	C23959
3/4	.7500	0.422	9.500	5.000	3	5	C23960
13/16	.8125	0.469	9.500	5.000	3	5	C23961
15/16	.9375	0.563	9.500	5.000	3	5	C23962

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series						>45
	Bright	☆		☆					☆	☆			

☆ = Best Performance ♦ = Acceptable





- ♦ Operating parameters:
See Technical section

ANSI
SIZES

HSS

LHS /
RHCSquare
ShankSurface
Treatment

Bright

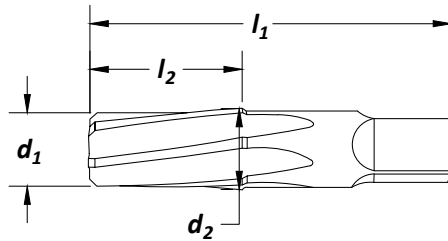

nominal pipe diameter	small end dia. d_1 (in)	large end dia. d_2 (in)	overall length l_1 (in)	flute length l_2 (in)	no. of flutes	order number 642
1/8	.316	.362	2.125	.750	6	C24982
1/4	.406	.472	2.438	1.063	6	C24983
3/8	.540	.606	2.563	1.063	6	C24984
1/2	.665	.751	3.125	1.375	6	C24985
3/4	.876	.962	3.750	1.375	8	C24986
1	1.103	1.212	3.750	1.750	8	C24987
1-1/4	1.444	1.553	4.000	1.750	10	C24988
1-1/2	1.684	1.793	4.250	1.750	10	C24989

High Spiral Spirex Taper Pin Style: 650

- ♦ Operating parameters:
See Technical section


ANSI
SIZES

HSS

1/4" / 12"

LH
Spiral
FluteSurface
Treatment

Bright

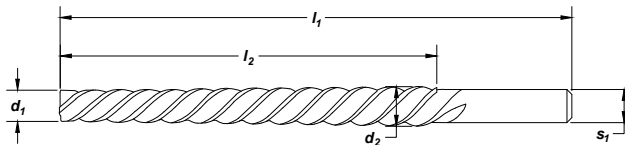

pin size	small end dia. d_1 (in)	large end dia. d_2 (in)	overall length l_1 (in)	flute length l_2 (in)	shank diameter s_1 (in)	order number 650
#7/0	.0497	.0666	1.813	.813	.0781	C24229
#6/0	.0611	.0806	1.938	.938	.0938	C24230
#5/0	.0719	.0966	2.188	1.188	.1094	C24231
#4/0	.0869	.1142	2.313	1.313	.1250	C24232
#3/0	.1029	.1302	2.313	1.313	.1406	C24233
#2/0	.1137	.1462	2.563	1.563	.1562	C24234
#0	.1287	.1638	2.938	1.688	.1719	C24235
#1	.1447	.1798	2.938	1.688	.1875	C24236
#2	.1605	.2008	3.188	1.938	.2031	C24237
#3	.1813	.2294	3.688	2.313	.2344	C24238
#4	.2071	.2604	4.063	2.563	.2656	C24239
#5	.2409	.2994	4.313	2.813	.3125	C24240
#6	.2773	.3540	5.438	3.688	.3594	C24241
#7	.3297	.4220	6.313	4.438	.4062	C24242
#8	.3971	.5050	7.188	5.188	.4375	C24243
#9	.4805	.6066	8.313	6.063	.5625	C24244
#10	.5799	.7216	9.313	6.813	.6250	C24245

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series						
	Bright	☆		☆						☆			

☆ = Best Performance ♦ = Acceptable



HOLEMAKING

Go To: [TABLE OF CONTENTS](#) All Products: www.gfii.com/literature/cleveland

Taper Pin - Straight & Helical Flute

Styles: **657, 659**



Note

♦ Operating parameters:
See Technical section

ANSI
SIZES

HSS

1/4" / 12"

LHS /
RHC

Straight
Flute


Square
Shank

Surface
Treatment


Bright

Reamers

High Speed Steel

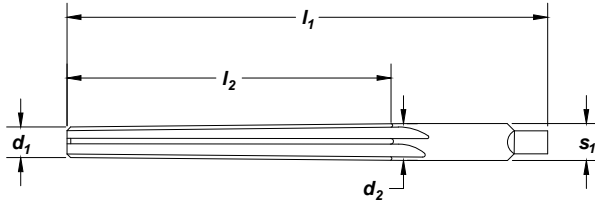

Style 657 - Straight Flute

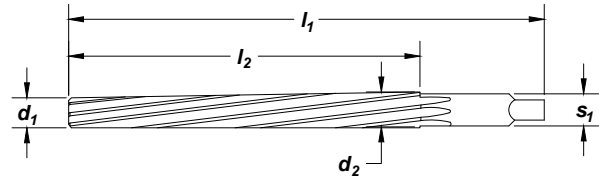

Style 659 - LHH/RHC

pin size	small end dia. d₁ (in)	large end dia. d₂ (in)	overall length l₁ (in)	flute length l₂ (in)	shank dia. s₁ (in)	no. of flutes	order number	
							657 straight flute	659 helical flute
#6/0	.0611	.0806	1.938	.938	.0938	4	C24250	C24271
#5/0	.0719	.0966	2.188	1.188	.1094	4	C24251	C24272
#4/0	.0869	.1142	2.313	1.313	.1250	4	C24252	C24273
#3/0	.1029	.1302	2.313	1.313	.1406	4	C24253	C24274
#2/0	.1137	.1462	2.563	1.563	.1562	4	C24254	C24275
#0	.1287	.1638	2.938	1.688	.1719	4	C24255	C24276
#1	.1447	.1798	2.938	1.688	.1875	6	C24256	C24277
#2	.1605	.2008	3.188	1.938	.2031	6	C24257	C24278
#3	.1813	.2294	3.688	2.313	.2344	6	C24258	C24279
#4	.2071	.2604	4.063	2.563	.2656	6	C24259	C24280
#5	.2409	.2994	4.313	2.813	.3125	6	C24260	C24281
#6	.2773	.3540	5.438	3.688	.3594	6	C24261	C24282
#7	.3297	.4220	6.313	4.438	.4062	6	C24262	C24283
#8	.3971	.5050	7.188	5.188	.4375	6	C24263	C24284
#9	.4805	.6066	8.313	6.063	.5625	6	C24264	C24285
#10	.5799	.7216	9.313	6.813	.6250	6	C24265	C24286

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				>45
	Bright	☆		☆				☆	☆	☆			

☆ = Best Performance ♦ = Acceptable



Straight Shank, C'bore & Spot Facer - Interchangeable Pilot

Style: 879


- ♦ Pilots - See Interchangeable Pilot
Style: 879P

ANSI
SIZES

HSS

RH
Spiral
FluteStraight
ShankSurface
Treatment

Bright

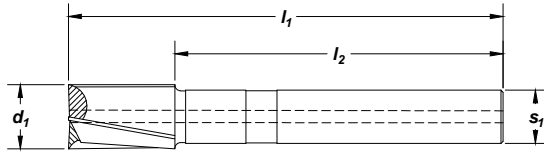

counterbore diameter d_1 (in)		pilot shank sizes		shank length	overall length	shank diameter	pilot size range	no. of flutes	order number
fraction	in	fraction	in	L_2 (in)	L_1 (in)	S_1 (in)			879
3/16	.1875	3/32	.0938	2.125	3.000	.234	1/8 - 3/16	3	C46421
7/32	.2188	3/32	.0938	2.125	3.000	.234	1/8 - 7/32	3	C46422
1/4	.2500	3/32	.0938	3.063	3.813	.234	1/8 - 3/16	3	C46423
9/32	.2812	3/32	.0938	3.063	3.813	.266	1/8 - 7/32	3	C46424
5/16	.3125	3/32	.0938	3.063	3.813	.297	1/8 - 1/4	3	C46425
11/32	.3438	3/32	.0938	3.063	3.813	.313	1/8 - 9/32	3	C46426
3/8	.3750	5/32	.1562	3.063	4.063	.313	3/16 - 5/16	3	C46427
13/32	.4062	5/32	.1562	3.063	4.063	.375	3/16 - 11/32	3	C46428
7/16	.4375	5/32	.1562	3.063	4.063	.375	3/16 - 3/8	3	C46429
15/32	.4688	3/16	.1875	3.063	4.313	.438	1/4 - 13/32	3	C46430
1/2	.5000	3/16	.1875	3.063	4.313	.438	1/4 - 7/16	3	C46431
17/32	.5312	3/16	.1875	3.063	4.313	.500	1/4 - 15/32	3	C46432
9/16	.5625	3/16	.1875	3.063	4.313	.500	1/4 - 1/2	3	C46433
19/32	.5938	3/16	.1875	3.875	5.125	.500	1/4 - 17/32	3	C46434
5/8	.6250	3/16	.1875	3.875	5.125	.500	1/4 - 9/16	3	C46435
21/32	.6562	3/16	.1875	3.875	5.125	.500	1/4 - 19/32	3	C46436
11/16	.6875	3/16	.1875	3.875	5.125	.500	1/4 - 5/8	3	C46437
23/32	.7188	1/4	.2500	3.875	5.375	.500	5/16 - 21/32	3	C46438
3/4	.7500	1/4	.2500	3.875	5.375	.500	5/16 - 11/16	3	C46439
25/32	.7812	1/4	.2500	3.875	5.375	.625	5/16 - 23/32	3	C46440
13/16	.8125	1/4	.2500	3.875	5.375	.625	5/16 - 3/4	3	C46441
7/8	.8750	1/4	.2500	3.875	5.375	.750	5/16 - 13/16	3	C46443
15/16	.9375	1/4	.2500	4.625	6.125	.750	5/16 - 7/8	3	C46445
1	1.0000	5/16	.3125	4.625	6.375	.750	3/8 - 15/16	3	C46447
1-1/16	1.0625	5/16	.3125	4.625	6.375	.750	3/8 - 1	3	C46448
1-1/8	1.1250	5/16	.3125	4.625	6.375	1.000	3/8 - 1-1/16	3	C46449

Counterbore

High Speed Steel

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	13-38	>38	16-38	>38	300 Series	400 series		18-22	22-32				
Hardness													
Bright	☆		☆					☆	☆	☆			

☆ = Best Performance ♦ = Acceptable

**Short, Aircraft-Type - Interchangeable Pilot**
Style: **884**


- ♦ Pilots - See Interchangeable Pilot
Style: **879P**

ANSI
SIZES

HSS

Straight
ShankSurface
Treatment

Bright

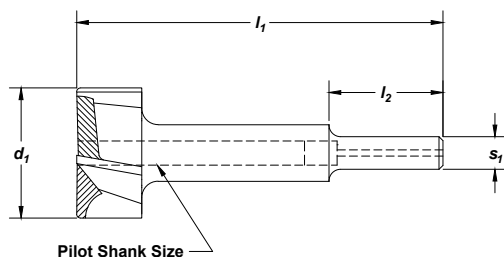

Counterbore

High Speed Steel

counterbore diameter d_1 (in)		pilot shank sizes		shank length	overall length	shank diameter	pilot size range	no. of flutes	order number
fraction	in	fraction	in	l_2 (in)	l_1 (in)	s_1 (in)			884
1/4	.2500	3/32	.0938	1.125	2.375	.250	1/8 - 3/16	4	C46886
5/16	.3125	3/32	.0938	.875	2.375	.250	1/8 - 1/4	4	C46888
3/8	.3750	3/32	.0938	.875	2.375	.250	3/16 - 5/16	4	C46890
13/32	.4062	1/8	.1250	.875	2.813	.250	3/16 - 11/32	4	C46891
7/16	.4375	1/8	.1250	.875	2.813	.250	3/16 - 3/8	4	C46892
15/32	.4688	1/8	.1250	.875	2.813	.250	1/4 - 13/32	4	C46893
1/2	.5000	1/8	.1250	.875	2.813	.250	1/4 - 7/16	4	C46894
9/16	.5625	1/8	.1250	.875	2.813	.250	1/4 - 1/2	4	C46896
5/8	.6250	1/8	.1250	.875	2.813	.250	1/4 - 9/16	4	C46898
11/16	.6875	3/16	.1875	.875	2.813	.250	1/4 - 5/8	4	C46900
3/4	.7500	3/16	.1875	.875	2.813	.250	5/16 - 11/16	4	C46902
13/16	.8125	3/16	.1875	.875	2.813	.250	5/16 - 3/4	4	C46904
7/8	.8750	3/16	.1875	.875	2.813	.250	5/16 - 13/16	4	C46906
15/16	.9375	3/16	.1875	.875	2.813	.250	5/16 - 7/8	4	C46908
1	1.0000	3/16	.1875	.875	2.813	.250	3/8 - 15/16	4	C46910

**TECH TIPS****AIRCRAFT TYPE COUNTERBORES**

- Designed for aircraft fabricating use with portable pneumatic and electric drills.
- Smaller pilot holes than standard counterbores.
- Corner radius of 1/32" is standard.

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series						
	Bright	☆		☆					☆	☆	☆		

☆ = Best Performance ♦ = Acceptable




- ♦ For pilot diameter, match pilot shank size, from style #884 or #879, to pilot shank size **S₁** in these columns.

ANSI
SIZES

HSS

Surface
Treatment

Bright

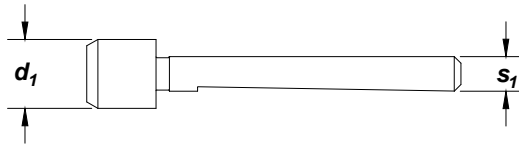

Counterbore

High Speed Steel

pilot diameter d₁ (in)	decimal equivalent	order number 879P S₁							
		3/32"	1/8"	5/32"	3/16"	1/4"	5/16"	3/8"	7/16"
3/32	.0938	C46520	—	—	—	—	—	—	—
.127	.1250	C46525	—	—	—	—	—	—	—
1/8	.1250	C46523	C46522	—	—	—	—	—	—
5/32	.1562	C46528	C46527	C46529	—	—	—	—	—
.157	.1570	C46531	—	—	—	—	—	—	—
.159	.1590	C46533	—	—	—	—	—	—	—
3/16	.1875	C46538	C46537	C46539	C46540	—	—	—	—
.191	.1910	C46545	C46544	—	C46546	—	—	—	—
13/64	.2031	—	C46547	—	—	—	—	—	—
7/32	.2188	C46549	C46548	C46550	C46551	—	—	—	—
1/4	.2500	C46554	C46553	C46555	C46556	C46557	—	—	—
.255	.2550	—	C46558	—	C46560	—	—	—	—
9/32	.2812	—	—	C46565	C46566	—	—	—	—
5/16	.3125	C46570	C46569	C46571	C46572	C46573	—	—	—
11/32	.3438	—	C46576	C46578	C46579	C46580	—	—	—
3/8	.3750	C46314	C46583	C46584	C46585	C46586	C46587	—	—
13/32	.4062	—	—	—	C46592	C46593	C46594	—	—
7/16	.4375	—	—	C46597	C46598	C46599	C46600	—	—
15/32	.4688	—	—	—	C46605	—	—	—	—
1/2	.5000	—	—	—	C46612	C46613	C46614	—	—
17/32	.5312	—	—	—	C46620	C46621	C46622	—	—
9/16	.5625	—	—	—	—	C46629	C46630	—	—
19/32	.5938	—	—	—	—	—	—	C46639	—
5/8	.6250	—	—	—	—	C46645	—	C46647	—
11/16	.6875	—	—	—	—	C46657	C46658	C46659	—
3/4	.7500	—	—	—	C46316	—	—	C46669	—
25/32	.7812	—	—	—	—	—	C46673	C46674	—
13/16	.8125	—	—	—	—	—	C46678	C46679	—
7/8	.8750	—	—	—	—	C46687	—	—	—
1-1/16	1.0625	—	—	—	—	—	—	—	C46716
1-1/8	1.1250	—	—	—	—	—	—	C46723	—

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				
	Bright	☆		☆				☆	☆	☆			

☆ = Best Performance ♦ = Acceptable



Clearance or Taper Router
Style: 655




ANSI SIZES

HSS

Straight Shank

Surface Treatment

Bright

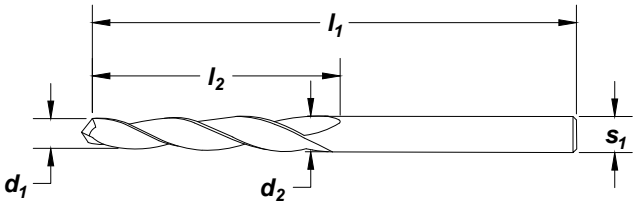

Counterbore

High Speed Steel

size number	shank diameter s_1 (in)	small end diameter d_1 (in)	large end diameter d_2 (in)	flute length l_2 (in)	overall length l_1 (in)	order no. 655
#1	.098	.081	.0980	.813	2.000	C24292
#2	.128	.110	.1280	.875	2.250	C24293
#3	.188	.165	.1875	1.063	2.500	C24294
#4	.250	.224	.2500	1.250	2.750	C24295

TECH TIPS

CLEARANCE OR TAPER ROUTER

- Use for cutting, trimming, routing, and elongating existing holes.

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series						
	Bright	☆		☆				☆	☆	☆			


☆ = Best Performance ◆ = Acceptable

ANSI
SIZESDIN
1897

HSS

Straight
ShankSurface
Treatment

Bright

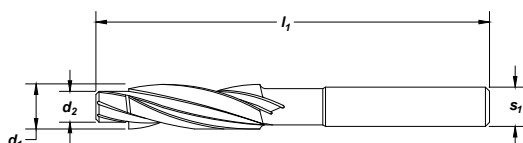

Counterbore

High Speed Steel

counterbore number	cutter diameter d_1 (in)	pilot diameter d_2 (in)	shank diameter s_1 (in)	overall length l_1 (in)	cap screw size	order number 183
183-CSS-6	.230	.135	.219	3.000	No. 6	C91695
183-CSS-7	.242	.150	.219	3.000	No. 6	C91696
183-CSS-8	.274	.161	.250	3.000	No. 8	C91697
183-CSS-9	.286	.178	.250	3.000	No. 8	C91698
183-CSS-10	.316	.187	.313	3.500	No. 10	C91699
183-CSS-11	.328	.204	.313	3.500	No. 10	C91700
183-CSS-12	.348	.213	.344	3.500	No. 12	C91701
183-CSS-16	.375	.250	.375	3.500	No. 12	C91703
183-CSS-17	.391	.266	.375	5.750	1/4	C92704
183-CSS-18	.406	.281	.375	5.750	1/4	C92705
183-CSM-6	.433	.268	.438	6.000	6mm	C91830
183-CSS-20	.438	.313	.438	6.000	5/16	C92706
183-CSS-21	.453	.328	.438	6.000	5/16	C92708
183-CSS-20-60	.469	.313	.438	6.000	5/16	C92707
183-CSS-22	.469	.344	.438	6.000	5/16	C91710
183-CSS-21-60	.484	.328	.438	6.000	5/16	C91709
183-CSS-22-60	.500	.344	.438	6.000	5/16	C91711
183-CSS-24	.563	.375	.500	6.500	3/8	C91712
183-CSS-25	.578	.391	.500	6.500	3/8	C91713
183-CSS-26	.594	.406	.500	6.500	3/8	C91714
183-CSS-28	.625	.438	.500	7.000	7/16	C91715
183-CSS-29	.641	.453	.500	7.000	7/16	C91717
183-CSS-30	.656	.469	.500	7.000	7/16	C91719
183-CSS-30-60	.688	.469	.500	7.000	7/16	C91720
183-CSM-10	.709	.433	.500	7.000	10mm	C91832
183-CSS-32	.750	.500	.500	7.250	1/2	C91721
183-CSS-33	.766	.516	.500	7.250	1/2	C91722
183-CSS-34	.781	.531	.500	7.250	1/2	C91723
183-CSM-12	.787	.531	.500	7.000	12mm	C91833
183-CSS-36	.813	.563	.750	7.500	9/16	C91724
183-CSS-40	.875	.625	.750	8.250	5/8	C91726
183-CSS-42	.906	.656	.750	8.250	5/8	C91728
183-CSS-42-60	.969	.656	.750	8.250	5/8	C91729
183-CSM-16	1.024	.689	.750	8.250	16mm	C91834
183-CSS-50	1.031	.781	1.000	8.813	3/4	C91734
183-CSS-50-60	1.156	.781	1.000	8.813	3/4	C91735
183-CSS-52-60	1.188	.813	1.000	8.813	3/4	C91737
183-CSM-20	1.299	.866	1.000	8.813	20mm	C91835
183-CSS-68-60	1.563	1.063	1.000	8.813	1	C91749
183-CSM-24	1.575	1.024	1.000	8.813	24mm	C92836



SET

3 Flute - Continuous Pilot
Style: 183 (continued)



Counterbore

High Speed Steel

set number	no. of pieces	size range	order number
183-CSS-1	9	CSS-6, -8, -10, -12, -16, -20, -24, -28, -32	C91750
183-CSS-3	8	CSS-18, -20-60, -21-60, -22-60, -22, -26, -30, -34	C91770



Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness				300 Series	400 series		18-22	22-32				
	Bright	☆		☆				☆	☆				
☆ = Best Performance ◆ = Acceptable													



Screw Machine / Stub Length Drills

	Type	Style	Order No.	Number of pieces	Surface Treatment				Material		Size Range	Case Type	
					Bright	Black Oxide	Straw Oxide	TIN	HSS	Cobalt		Metal	Plastic
	General Purpose	2120	C00980	29	•	•	•	•	•	•	1/16" through 1/2" x 1/64"	•	•
			C01332	26	•	•	•	•	•	•	letter A through Z	•	•
	NAS907-C Heavy Duty	2330	C70370	15	•	•	•	•	•	•	1/16" through 1/2" x 1/32"	•	•
			C70369	21	•	•	•	•	•	•	1/16" through 3/8" x 1/64"	•	•
			C70368	29	•	•	•	•	•	•	1/16" through 1/2" x 1/64"	•	•

#C00980

#C01332

#C70370

#C70369

#C70368



Jobber Drills

	Type	Style	Order No.	Number of pieces	Surface Treatment				Material		Size Range	Case Type	
					Bright	Black Oxide	Straw Oxide	TIN	HSS	Cobalt		Metal	Plastic
	General Purpose	2001	C72197	29	•	•	•	•	•	•	1/16" through 1/2" x 1/64"	•	•
			C71000	25	•	•	•	•	•	•	1 mm through 13 mm x 0.5 mm	•	•
			C00960	50	•	•	•	•	•	•	1 mm through 5.9 mm x 0.1 mm	•	•
	General Purpose	2002	C72199	15	•	•	•	•	•	•	1/16" through 1/2" x 1/32"	•	•
			C72198	29	•	•	•	•	•	•	1/16" through 1/2" x 1/64"	•	•
			C00939	26	•	•	•	•	•	•	letter A through Z	•	•
			C00934	60	•	•	•	•	•	•	wire gauge #1 through #60	•	•
			C01330	115	•	•	•	•	•	•	1/16" through 1/2" x 1/16", A through Z and #1 through #60	•	•
	General Purpose	2002	C72000	25	•	•	•	•	•	•	1 mm through 13 mm x 0.5 mm	•	•
			C00937	20	•	•	•	•	•	•	#61-#80	•	•
	Q-Cobalt Wide Land Parabolic	2075	C00901	15	•	•	•	•	•	•	1/16" through 1/2" x 1/32"	•	•
			C00902	29	•	•	•	•	•	•	1/16" through 1/2" x 1/64"	•	•
	NAS907-B Heavy Duty	2222	C70371	20	•	•	•	•	•	•	1/16" through 1/2" x 1/64"	•	•
	NAS907-J Heavy Duty	2213	C70365	29	•	•	•	•	•	•	1/16" through 1/2" x 1/64"	•	•
			C00986	26	•	•	•	•	•	•	A through Z letter	•	•
			C70366	60	•	•	•	•	•	•	#1 through #60 wire gauge	•	•
			C70367	115	•	•	•	•	•	•	1/16" through 1/2" x 1/64", A through Z and #1 through #60	•	•
	Q-AMD Short Flute	3780	C14499	29	•	•	•	•	•	•	1/16" through 1/2" x 1/64"	•	•

#C72197

#C71000

#C00960

#C72199






#C72198

#C00939

#C00934

#C01330

#C72000



#C00937

#C00901

#C00902

#C70371

#C70365

#C00366

#C00986

#C70367

#C14499



Taper Length Drills

Taper Length Drills					Surface Treatment		Material		Size Range	Case Type			
				Number of pieces	Bright	Black Oxide	Straw Oxide	TIN	HSS	Cobalt		Metal	Plastic
	Type	Style	Order No.		•			•		1/16" through 1/2" x 1/64"	•		
													
1/16" through 1/2" x 1/64"													

Misc. Drills

Misc. Drills						Surface Treatment		Material		Size Range		Case Type		
		Type	Style	Order No.	Number of pieces	Bright	Black Oxide	Straw Oxide	TiN	HSS	Cobalt		Metal	Plastic
		Spotting / Centering	2636	C26173	6		•			•	•	90° - 1/4" through 1" (short)	•	•
				C26180	6		•			•	•	120° - 1/4" through 1" (short)	•	•
			2646	C26187	6		•			•	•	90° - 1/4" through 1" (long)	•	•
				C26194	6		•			•	•	120° - 1/4" through 1" (long)	•	•
			2635	C24173	6	•				•	•	90° - 1/4" through 1" (short)	•	•
				C24180	6	•				•	•	120° - 1/4" through 1" (short)	•	•
			2645	C24187	6	•				•	•	90° - 1/4" through 1" (long)	•	•
				C24194	6	•				•	•	120° - 1/4" through 1" (long)	•	•
	Countersink / Deburring	3001	C94588	4	•				•	•	60° - 5/16, 3/8, 1/2, 5/8	•	•	
			C94589	4	•				•	•	82° - 5/16, 3/8, 1/2, 5/8	•	•	
			C94590	4	•				•	•	90° - 5/16, 3/8, 1/2, 5/8	•	•	
			C94591	4	•				•	•	100° - 5/16, 3/8, 1/2, 5/8	•	•	
			C94592	5	•				•	•	60° - 5/16, 3/8, 1/2, 3/4, 1	•	•	
			C94593	5	•				•	•	82° - 5/16, 3/8, 1/2, 3/4, 1	•	•	
			C94594	5	•				•	•	90° - 5/16, 3/8, 1/2, 3/4, 1	•	•	
			C94595	5	•				•	•	100° - 5/16, 3/8, 1/2, 3/4, 1	•	•	
	Countersink / Drill Plain	998	C00944	5	•				•	•	#1 through #5	•	•	
	Single Flute Countersink	10001	C00970	5		•			•	•	60° - 1/4" through 3/4" x 1/8"	•	•	
			C00971	5		•			•	•	82° - 1/4" through 3/4" x 1/8"	•	•	
	3 Flute Countersink	10003	C00972	5		•			•	•	60° - 1/4" through 3/4" x 1/8"	•	•	
			C00973	5		•			•	•	82° - 1/4" through 3/4" x 1/8"	•	•	
	4 Flute Reamer / Countersink	610	C00969	5		•			•	•	82° - 1/4" through 3/4" x 1/8"	•	•	

#C26173

#C24173

#C24180

#C24187

#C24194

#C00944



Reamers

Reamers					Surface Treatment				Material		Size Range	Case Type	
				Number of pieces	Bright	Black Oxide	Straw Oxide	TIN	HSS	Cobalt		Metal	Plastic
	Type	Style	Order No.										
	Straight Shank, Straight Flute	4001	C00964	29	•				•		1/16" through 1/2" x 1/64"	•	
													
1/16" through 1/2" x 1/64"													

Counterbores

Counterbores								Surface Treatment	Material	Size Range	Case Type			
				Number of pieces	Bright	Black Oxide	Straw Oxide	TiN	HSS	Cobalt	#C91750	#C91770	Metal	Plastic
Type	Style	Order No.												
	3 Flute Continuous Pilot	183 <i>(Set #183-CSS-1)</i>	C91750	9	•				•		CSS-6, -8, -10, -12, -16, -20, -24, -28, -32		•	
		183 <i>(Set #183-CSS-3)</i>	C91770	8	•				•		CSS-18, -20-60, -21-60, -22-60, -22, -26, -30, -34		•	



TECHNICAL INFORMATION

Nomenclature	D-115
Material Class	D-116
Operating Parameters	D-117
Surface Treatments	D-118
Special Drills	D-118
Material Class	D-119
Operating Parameters	D-120
Drill Cutting Speeds	D-121
Dimensional Specifications	D-124

Shank / Tang	D-130
Morse Taper Shank	D-130
Reamers	
Custom Reamers	D-131
Reamer Speeds and Feeds	D-133
Tolerances / Regrinding	D-134
Reamer Cutting Speeds	D-135

Drill Nomenclature

Axis

The imaginary straight line which forms the longitudinal center line of the drill.

Back Taper

A slight decrease in diameter, from front to back in the body of the drill.

Body

The portion of the drill extending from the shank or neck to the outer corners of the cutting lips.

Body Diameter Clearance

That portion of the land that has been cut away so it will not rub against the walls of the hole.

Chisel Edge

The edge at the end of the web that connects the cutting lips.

Drill Diameter

The diameter over the margins of the drill measured at the point.

Flutes

Helical or straight grooves cut or formed in the body of the drill to provide cutting lips, to permit removal of chips, and to allow cutting fluid to reach the cutting lips.

Flute Length

The length from the outer corners of the cutting lips to the extreme back end of the flutes. However, metric drills are measured from the extreme end of the shank to the end of the flute at the point.

Land

The peripheral portion of the body between adjacent flutes.

Land Width

The distance between the leading edge and the heel of the land measured at a right angle to the leading edge.

Lip Relief

The axial relief on the drill point.

Margin

The cylindrical portion of the land which is not cut away to provide clearance.

Neck

The section of reduced diameter between the body and the shank of a drill.

Overall Length

The length from the extreme end of the shank to the outer corners of the cutting lips. However, metric drills are measured from the extreme end of the shank to the end of the flute at the point.

Point

The cutting end of a drill, made up of the ends of the lands and the web. In form it resembles a cone, but departs from a true cone to furnish clearance behind the cutting lips.

Point Angle

The angle included between the cutting lips projected upon a plane parallel to the drill axis and parallel to the two cutting lips.

Shank



The part of the drill by which it is held and driven.

Tang

The flattened end of a taper shank, intended to fit into a driving slot in a socket.

Web

The central portion of the body that joins the lands. The extreme end of the web forms the chisel edge on a two flute drill.

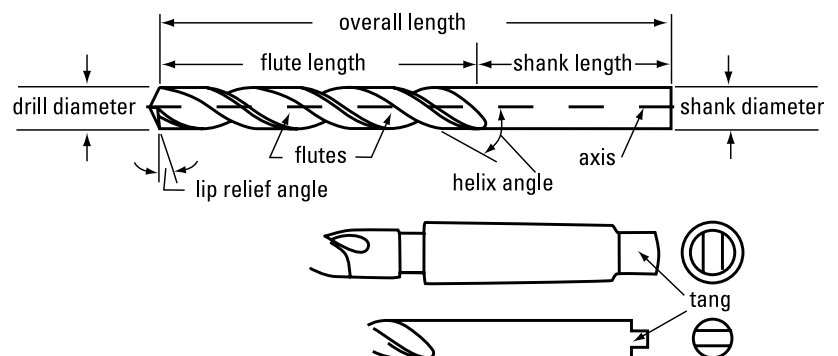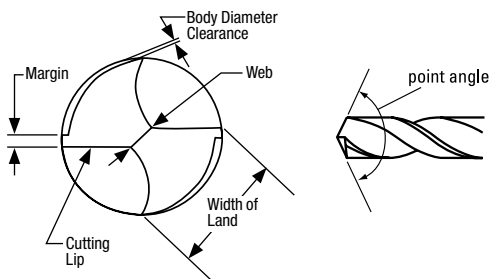



Recommended Surface Feet per Minute (SFM) and Coolant by Material Application

Ferrous Materials

Materials	Brinell Hardness	geometry	SFM	coolant
Low Carbon Steel	85-125	general-purpose	80-95	soluble oil
Medium Carbon Steel	125-175	general-purpose	70-85	soluble oil
High Carbon Steel	175-225	heavy-duty	45-65	soluble oil
Steels Alloyed	under 200	general-purpose	60-90	soluble oil
	200-300	heavy-duty	40-70	soluble oil
	over 300	cobalt	20-30	soluble oil
Steel Drop Forgings Heat Treated	330-370		30-40	cutting oil
	370-420		20-30	cutting oil
	over 420		10-20	cutting oil
Grey Cast Iron Soft	125	general-purpose	140-150	dry
Grey Cast Iron Medium	120-200	heavy-duty	50-80	soluble oil
Grey Cast Iron Hard	up to 350	heavy-duty	25-40	soluble oil
Titanium Alloys (Ti)-75A	300-440	cobalt	50-60	cutting oil
Ti-150A, RS-120	300-440	cobalt	40-50	cutting oil
Ti-140A, RC 130B	300-440	cobalt	30-40	cutting oil
Ti-6AL -4V	300-440	cobalt	20-30	cutting oil
300 Series Stainless	120-200	cobalt	20-40	cutting oil
400 Series Stainless	200-300	cobalt	40-70	cutting oil
Martensitic 416, 420, F416 Plus K, 400F, 416SE, 440F	135-185	cobalt	40-50	cutting oil
Precipitation Hardening	325-375	cobalt	30	cutting oil
Stainless Steel, Cast	400-450	cobalt	20	cutting oil
Heat Resisting Steels	175-225	cobalt	10-25	cutting oil
Nimonic Alloys	200-300	cobalt	10-20	cutting oil
Manganese 12-14% min	125-220	heavy-duty	10-12	cutting oil
Spring Steels	402	cobalt	15-30	soluble oil
Armor Plate	200-250	cobalt	40	soluble oil
	250-300	cobalt	35	soluble oil
	300-350	cobalt	30	cutting oil

Non-Ferrous Materials

Materials	Brinell Hardness	geometry	SFM	coolant
Aluminum Pure	140-350	fast spiral*	130-200	soluble oil
Aluminum Alloys	140-330	fast spiral*	150-300	soluble oil
Aluminum Leaded	40-100	fast spiral*	200-325	soluble oil
Aluminum Silicon Alloy Die Cast	40-100	fast spiral*	25-50	soluble oil
Brass	190-210	slow spiral*	200-250	cutting or soluble oil
Bronze	150-200	slow spiral*	200-250	soluble oil
Copper - Nickel & Copper Tin Alloy	65-100	general-purpose*	140-200	cutting or soluble oil
Copper - Aluminum Alloys	30-100	general-purpose*	120-200	cutting or soluble oil
Magnesium Alloys - Wrought	50-90	general-purpose*	140-330	cutting or soluble oil
Magnesium Alloys - Cast	50-90	general-purpose*	140-365	cutting or soluble oil
Nickel Alloys - Wrought and Cast	80-170	cobalt	15-20	cutting or soluble oil
Nickel Alloys - Monel	115-240	cobalt	15-20	cutting or soluble oil
Nickel Alloys - Beryllium Nickel	200-250	cobalt	10-12	cutting or soluble oil
Zinc Alloy	112-126	general-purpose	200-250	soluble oil

*bright only



Determining Feed and Speed

This Cleveland catalog offers starting feed and speed parameters for each style of tool. The recommended operating parameters are found in front of each tool style for high-performance tools and in the beginning of the general application section for those tools. Drill cutting speed tables for individual sizes of drills can be found in this section, titled "Drill Cutting Speeds".

To determine your own starting speeds and feeds, follow this procedure.

Look up the material to be drilled in the Recommended SFM (surface feet per minute) by material class table in this section, titled "Material Class" and determine the geometry class.

Determine the drill style from the Drill Style by Geometry and Length/Construction table on page 3 based on recommended drill type and drill length desired.

Review each drill style to understand the geometry differences. Select the appropriate geometry and check to ensure the desired size is available.

Starting speed and feed recommendations for the drill can be determined from the formulas below.

Recommended operating parameters for high-performance drills are generally 20% faster than for conventional geometries and are shown with the individual drill styles. Feed rates for high performance drills are heavier than for conventional geometries by 50% or more.

Drill Diameter Tolerances

Diameter Range (inches)	Plus (+) (inches)	Minus (-) (inches)
through 1/8	.0000	.0005
over 1/8 through 1/4	.0000	.0007
over 1/4 through 1/2	.0000	.0010
over 1/2 through 1	.0000	.0012
over 1 through 2	.0000	.0015
over 2 through 3-1/2	.0000	.0020

Drill Overall Length and Flute Length Tolerances

Diameter Range (inches)	Plus (+) (inches)	Minus (-) (inches)
#80 through 1/8	.1250	.0625
over 1/8 through 1/2	.1250	.1250
over 1/2 through 1	.2500	.1250
over 1 through 2	.2500	.2500
over 2 through 3-1/2	.3750	.3750

Drill Point Angle Tolerances

Diameter Range (inches)	Included Angle (degrees)	Tolerance (degrees)
1/16 through 1/2	118° or 135°	± 5°
over 1/2 through 1-1/2	118°	± 3°
over 1-1/2 through 3-1/2	118°	± 2°

Drill Lip Height Tolerances

Diameter Range (inches)	Total Indicator Variation (inches)
1/16 through 1/8	.0020
over 1/8 through 1/4	.0030
over 1/4 through 1/2	.0040
over 1/2 through 1	.0050
over 1 through 3-1/2	.0060

Drill Definitions

RPM = revolutions per minute
 SFM = surface feet per minute
 FR = feed rate in inches per minute
 IPR = inches per revolution

Drill Formula

$RPM = 3.8 \times SFM / \text{drill diameter}$
 $SFM = 0.26 \times RPM \times \text{drill diameter}$
 $FR = RPM \times IPR$



Drill Feeds

Diameter Range (inches)	IPR (inches per revolution)	
	Normal Feeds	Heavy Feed
1/16 through 1/8	.001 - .002	.002 - .004
over 1/8 through 1/4	.002 - .004	.004 - .008
over 1/4 through 1/2	.004 - .008	.008 - .016
over 1/2 through 1	.008 - .016	.016 - .024
over 1	.016 - .024	.024 - .032



Surface Treatment	Recommended Applications	Precautions
TiN (Titanium Nitride)	For ferrous and non-metallic materials: free-machining steels and irons, high tensile steels, tough machining steels, plastics, hard rubber, and fiber. The hard, smooth treatment increases tool life, improves finish, and allows higher speeds.	Avoid titanium and titanium alloys due to tendency to gall.
TiCN (Titanium Carbonitride)	For ferrous and non-ferrous materials: cast iron, aluminum, stainless steel, brass, abrasive materials, high-silicon automotive aluminum, glass-filled plastics, and composites. The hard, smooth treatment increases tool life and improves finish.	Use with caution in titanium, titanium alloys, and aluminum die casting due to tendency to gall.
TiAlN (Titanium Aluminum Nitride)	For ferrous materials, high-temperature alloys, and titanium: stainless steels, gray cast irons or nodular irons, and steels containing high-nickel, cobalt, chromium, and tungsten. Most effective where higher speeds are available.	Avoid in most non-ferrous materials.
CrN (Chromium Nitride)	For non-ferrous materials: brass, bronze, zinc alloys, and magnesium alloys. CrN is medium-hard and has a lower wear resistance than TiN, TiCN, and TiAlN. However, unlike these treatments, CrN does not gall in non-ferrous materials.	Ineffective in ferrous materials.

Special Drills

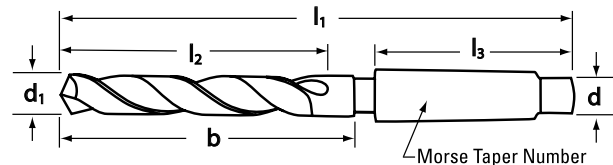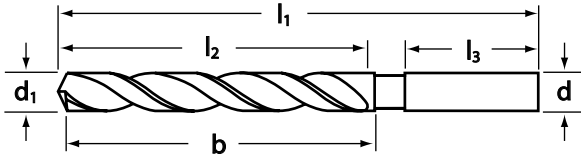

If you know the specs for your special tool, please send a blueprint and/or provide this information:

- Material/hardness to be drilled.
- d = shank diameter or size.**
 - If standard taper shank is ordered, specify as No. 2 American National Standard Taper, No. 3 American National Standard Taper, etc.
 - If taper shank is special, give diameter at small end, length of shank, diameter at large end, taper per foot, and furnish a sample of gauge if possible.
 - If tang is special, give thickness and length.

b = body length.

d¹ = diameter of fluted section. For multiple diameter drills, indicate the diameter of the large fluted section

l¹ = overall length.

- When ordering extra-length drills, specify: type of material being drilled, depth of hole, whether drilling in a vertical or horizontal position, and whether feed is intermittent or with only occasional withdrawals.

l² = flute length.

l³ = shank length.

For multiple-diameter drills, provide:

- the diameter of the small, fluted section
- the included angle of cutting shoulder. Note: this is measured as an angle between the two cutting edges (included angle) and not as an angle with the center line.
- the length of small diameter. Note: this is measured from the outer corner of the point to the bottom or inner corner of the cutting shoulder.

For special accuracy requirements, give tolerances on the important dimensions.

For assistance in designing your special tool, provide

- Workpiece material hardness
- Hole diameter
- Depth of hole
- Thru hole or blind hole
- Shank type
- Coolant or non-coolant
- Step length if necessary
- Step angle

Make sure that suitable allowance has been made for re-sharpening and for clearance for the spindle above the drill bushings. If a particular style of flute-construction is desired, it should be specified by reference to the regular drill of the required flute-style.



		Speeds (SFM) Drill Surface Treatment				Feed Rate (IPR) increase by 25% for TiCN			
Ferrous Material									
Material	Hardness	Bright, Black Oxide & Straw	TiN	TiCN	TiAlN	1/8" 3.17mm	1/4" 6.35mm	3/8" 9.52mm	1/2" 12.70mm
low carbon steel	85-125 Bhn	90	125	135	—	.0040	.0065	.0080	.0100
medium carbon steel	125-175 Bhn	90	125	135	—	.0040	.0065	.0080	.0100
high carbon steel	175-225 Bhn	90	125	135	—	.0030	.0050	.0065	.0080
alloyed steel	200-300 Bhn	60	80	90	—	.0025	.0040	.0050	.0065
heat-treatable steel and forgings	370-420 Bhn	40	50	60	70	.0025	.0040	.0050	.0065
tool steels	< 24 HRc	60	80	90	110	.0030	.0050	.0065	.0080
	> 24-30 HRc	30	40	45	55	.0025	.0040	.0050	.0065
high-speed steels	14-30 HRc	35	50	55	60	.0025	.0040	.0050	.0065
gray cast iron	240 Bhn	115	160	175	—	.0050	.0080	.0100	.0125
	<300 Bhn	90	125	135	—	.0050	.0080	.0100	.0125
mallable cast iron	<300 Bhn	70	95	105	—	.0050	.0080	.0100	.0125
chilled cast iron	<350 Bhn	25	35	40	—	.0025	.0040	.0050	.0065
stainless steel									
300 series (Austenetic)	120-200 Bhn	60	80	90	100	.0025	.0040	.0050	.0065
400 series (Martensitic)	200-300 Bhn	40	50	60	80	.0025	.0040	.0050	.0065
sulphurized	> 25 HRc	45	65	70	80	.0025	.0040	.0050	.0065
spring steel	400 Bhn	25	35	40	45	.0020	.0030	.0040	.0050
Non-Ferrous Material									
Material	Hardness	Bright, Black Oxide & Straw	TiN	TiCN	TiAlN	1/8" 3.17mm	1/4" 6.35mm	3/8" 9.52mm	1/2" 12.70mm
aluminum and aluminum alloys	40-100 Bhn	180	—	—	—	.0050	.0080	.0100	.0125
cast aluminum									
	< 10% Si	200 Bhn	200	275	—	.0050	.0080	.0100	.0125
	> 10% Si	200 Bhn	180	225	250	.0040	.0065	.0080	.0100
brass, long chipping	190-210 Bhn	150	—	—	—	.0040	.0065	.0080	.0100
bronze, long chipping	150-200 Bhn	90	115	—	130	.0030	.0050	.0065	.0080
copper, low alloy	65-100 Bhn	120	145	—	—	.0040	.0065	.0080	.0100
plastics, duraplastics	N/A	55	75	80	—	.0030	.0050	.0065	.0080

The speeds and feeds listed here are conservative recommendations for initial setup. In actual use, depending on the machine environment and workpiece material, significantly higher speeds and feeds may be achievable.

Use these speeds and feeds as a starting point. Cutting conditions can be gradually adjusted until the optimum settings for the application are found.

Questions? Contact Technical Support at 800.892.4281.



TECH TIPS

Q-Cobalt Advantages

- Deliver close hole tolerance for high-precision work.
- Use higher speeds and feeds for increased productivity.
- Ideal for deep-hole drilling in a wide range of materials.



Material	Hardness	Speeds (SFM)		Feed Rate (IPR) for drill diameter					
		Bright		.0625"	.1250"	.2500"	.5000"	.7500"	1.0000"
low carbon steel, annealed	85-125 Bhn	85-150	low	.0005	.0010	.0020	.0040	.0050	.0060
			high	.0015	.0030	.0050	.0090	.0100	.0120
medium carbon steel	275-425 Bhn	65-120	low	.0005	.0010	.0020	.0030	.0040	.0040
			high	.0010	.0020	.0040	.0080	.0900	.0100
hardened steel	48-52 Rc C	30-90	low	.0005	.0010	.0020	.0030	.0040	.0040
			high	.0010	.0030	.0030	.0050	.0060	.0070
stainless steel (soft)	135-275 Bhn	50-150	low	.0005	.0005	.0020	.0040	.0050	.0060
			high	.0010	.0030	.0060	.0060	.0080	.0100
stainless steel (hard)	275-425 Bhn	30-90	low	.0005	.0005	.0010	.0015	.0020	.0025
			high	.0010	.0020	.0030	.0040	.0060	.0070
cast iron (soft)	120-220 Bhn	100-300	low	.0010	.0020	.0040	.0050	.0070	.0090
			high	.0020	.0040	.0080	.0100	.0120	.0140
cast iron (hard)	220-320 Bhn	60-200	low	.0015	.0010	.0020	.0030	.0040	.0050
			high	.0020	.0030	.0040	.0070	.0080	.0100
ductile iron		70-250	low	.0010	.0020	.0030	.0050	.0060	.0070
			high	.0020	.0040	.0060	.0080	.0090	.0150
malleable iron		80-250	low	.0010	.0020	.0030	.0050	.0060	.0070
			high	.0020	.0050	.0060	.0120	.0140	.0150
high-temp alloys, nickel-based		15-20	low	.0005	.0005	.0010	.0015	.0020	.0025
			high	.0010	.0030	.0040	.0050	.0600	.0070
monel, high nickel steels		15-20	low	.0005	.0005	.0010	.0015	.0020	.0025
			high	.0010	.0020	.0030	.0040	.0050	.0060
titanium (soft)		60-200	low	.0005	.0020	.0040	.0050	.0060	.0070
			high	.0010	.0030	.0060	.0060	.0080	.0100
titanium (hard)		45-200	low	.0005	.0010	.0020	.0040	.0040	.0050
			high	.0020	.0040	.0070	.0090	.0100	.0120
refractory alloys		50-200	low	.0005	.0005	.0020	.0040	.0050	.0050
			high	.0010	.0030	.0060	.0100	.0120	.0120
aluminum, aluminum alloys		150-400	low	.0010	.0020	.0030	.0050	—	—
			high	.0020	.0040	.0070	.0130	—	—
brass, bronze		100-300	low	.0005	.0010	.0020	.0040	—	—
			high	.0015	.0030	.0040	.0100	—	—
copper, copper alloys		150-400	low	.0010	.0030	.0050	.0060	—	—
			high	.0030	.0050	.0120	.0140	—	—
magnesium, magnesium alloys		200-650	low	.0015	.0030	.0050	.0080	—	—
			high	.0030	.0070	.0120	.0150	—	—
plastics, glass filled		150-300	low	.0010	.0020	.0030	.0050	—	—
			high	.0020	.0040	.0060	.0120	—	—
plastics		250-600	low	.0015	.0030	.0040	.0060	—	—
			high	.0030	.0050	.0120	.0160	—	—

Higher feed and speed values should be favored for softer materials; lower feed and speed values should be used for harder materials. The above recommendations are for hole depths up to 2 drill diameters.

When hole depths run 3 to 6 times diameters, speeds should be reduced 10% to 35% respectively, and feeds should be reduced 10% to 20% respectively.


Fractional

Drill Size Frac / Dec	Feet per Minute														
	10'	20'	30'	40'	50'	60'	70'	80'	90'	100'	110'	120'	130'	140'	150'
	Revolutions per Minute														
1/16 .0625	611	1222	1833	2445	3056	3667	4278	4889	5550	6111	6722	7334	7945	8556	9167
1/8 .1250	306	611	917	1222	1528	1833	2139	2445	2750	3056	3361	3667	3973	4278	4584
3/16 .1875	204	407	611	815	1019	1222	1426	1630	1833	2037	2241	2445	2648	2852	3056
1/4 .2500	153	306	458	611	764	917	1070	1222	1375	1528	1681	1833	1986	2139	2292
5/16 .3125	122	244	367	489	611	733	856	978	1100	1222	1345	1467	1589	1711	1833
3/8 .3750	102	204	306	407	509	611	713	815	917	1019	1120	1222	1324	1426	1528
7/16 .4375	87	175	262	349	437	524	611	698	786	873	960	1048	1135	1222	1310
1/2 .5000	76	153	229	306	382	458	535	611	688	764	840	917	993	1070	1146
5/8 .6250	61	122	183	244	306	367	428	489	550	611	672	733	794	856	917
3/4 .7500	51	102	153	203	255	306	357	407	458	509	560	611	662	713	764
7/8 .8750	44	87	131	175	218	262	306	349	393	436	480	524	568	611	655
1 1.0000	38	76	115	153	191	229	267	306	344	382	420	458	497	535	573
1-1/8 1.1250	34	68	102	136	170	204	238	272	306	340	373	407	441	475	509
1-1/4 1.2500	31	61	92	122	153	183	214	244	275	306	336	367	397	428	458
1-3/8 1.3750	28	56	83	111	139	167	194	222	250	278	306	333	361	389	417
1-1/2 1.5000	26	51	76	102	127	153	178	204	229	255	280	306	331	357	382
1-5/8 1.6250	24	47	70	94	117	141	165	188	212	235	259	282	306	329	353
1-3/4 1.7500	22	44	65	87	109	131	153	175	196	218	240	262	284	306	327
1-7/8 1.8750	20	41	61	81	102	122	143	163	183	204	224	244	265	285	306
2 2.0000	19	38	57	76	95	115	134	153	172	191	210	229	248	267	287
2-1/4 2.2500	17	34	51	68	85	102	119	136	153	170	187	204	221	238	255
2-1/2 2.5000	15	31	46	61	76	92	107	122	137	153	168	183	199	214	229
2-3/4 2.7500	14	28	42	56	69	83	97	111	125	139	153	167	181	194	208
3 3.0000	13	25	38	51	64	76	89	102	115	127	140	153	166	178	191

Letter

Drill Size Letter / Dec	Feet per Minute														
	10'	20'	30'	40'	50'	60'	70'	80'	90'	100'	110'	120'	130'	140'	150'
	Revolutions per Minute														
A .2340	163	326	491	654	818	982	1145	1309	1472	1636	1796	1959	2122	2285	2448
B .2380	161	321	482	642	803	963	1124	1284	1445	1605	1765	1926	2086	2247	2407
C .2420	158	316	473	631	789	947	1105	1262	1420	1578	1736	1894	2052	2210	2368
D .2460	155	311	467	622	778	934	1089	1245	1400	1556	1708	1863	2018	2174	2329
E .2500	153	306	458	611	764	917	1070	1222	1375	1528	1681	1834	1986	2139	2292
F .2570	149	297	446	594	743	892	1040	1189	1337	1486	1635	1784	1932	2081	2229
G .2610	146	293	440	585	732	878	1024	1170	1317	1463	1610	1756	1903	2049	2195
H .2660	144	287	430	574	718	862	1005	1149	1292	1436	1580	1723	1867	2010	2154
I .2720	140	281	421	562	702	842	983	1123	1264	1404	1545	1685	1826	1966	2106
J .2770	138	276	414	552	690	827	965	1103	1241	1379	1517	1655	1793	1930	2068
K .2810	136	272	408	544	680	815	951	1087	1223	1359	1495	1631	1767	1903	2039
L .2900	132	263	395	527	659	790	922	1054	1185	1317	1449	1581	1712	1844	1976
M .2950	129	259	389	518	648	777	907	1036	1166	1295	1424	1554	1683	1813	1942
N .3020	126	253	380	506	633	759	886	1012	1139	1265	1391	1518	1644	1771	1897
O .3160	121	242	363	484	605	725	846	967	1088	1209	1330	1450	1571	1692	1813
P .3230	118	237	355	473	592	710	828	946	1065	1183	1301	1419	1537	1657	1774
Q .3320	115	230	345	460	575	690	805	920	1035	1150	1266	1384	1496	1611	1726
R .3390	113	225	338	451	564	676	789	902	1014	1127	1239	1355	1465	1577	1690
S .3480	110	220	329	439	549	659	769	878	988	1098	1207	1317	1427	1537	1646
T .3580	107	213	320	426	533	640	746	853	959	1066	1173	1280	1387	1494	1600
U .3680	104	208	311	415	519	623	727	830	934	1038	1142	1246	1349	1453	1557
V .3770	101	203	304	405	507	608	709	810	912	1013	1114	1219	1317	1418	1520
W .3860	99	198	297	396	495	594	693	792	891	989	1088	1188	1286	1385	1484
X .3970	96	192	289	385	481	576	672	769	865	962	1058	1155	1251	1347	1443
Y .4040	95	189	284	378	473	567	662	756	851	945	1040	1135	1229	1324	1418
Z .4130	92	185	277	370	462	555	647	740	832	925	1017	1110	1202	1295	1387



HOLEMAKING

Drill Cutting Speeds

Go To: [TABLE OF CONTENTS](#) All Products: www.gfii.com/literature/cleveland



TECHNICAL

Diameter Range (inches)	Normal Feeds (IPR)	Heavy Feed (IPR)
from 1/16 thru 1/8	.001-.002	.002-.004
over 1/8 thru 1/4	.002-.004	.004-.008
over 1/4 thru 1/2	.004-.008	.008-.016
over 1/2 thru 1	.008-.016	.016-.024
over 1	.016-.024	.024-.032

Wire Gage

Drill Size Wire / Dec		Feet per Minute														
		10'	20'	30'	40'	50'	60'	70'	80'	90'	100'	110'	120'	130'	140'	150'
		Revolutions per Minute														
1	.2280	168	335	503	670	838	1005	1173	1340	1508	1675	1843	2010	2179	2346	2513
2	.2210	173	345	518	691	864	1037	1210	1382	1555	1728	1901	2074	2247	2420	2593
3	.213	179	359	538	717	897	1076	1255	1434	1614	1793	1974	2152	2331	2511	2690
4	.2090	183	365	548	731	914	1097	1280	1462	1645	1828	2010	2193	2376	2560	2741
5	.2055	186	372	558	744	930	1115	1301	1487	1673	1859	2045	2230	2416	2602	2788
6	.2040	187	374	562	749	936	1123	1310	1498	1685	1872	2060	2247	2434	2621	2809
7	.2010	190	380	570	760	950	1140	1330	1520	1710	1900	2090	2281	2470	2660	2850
8	.1990	192	384	576	768	960	1151	1343	1535	1727	1919	2111	2303	2495	2687	2879
9	.1960	195	390	585	780	975	1169	1364	1559	1754	1949	2144	2339	2534	2728	2923
10	.1935	197	395	592	790	987	1184	1382	1579	1777	1974	2171	2369	2566	2764	2961
11	.1910	200	400	600	800	1000	1200	1400	1600	1800	2000	2200	2400	2600	2800	3001
12	.1890	202	404	606	808	1010	1213	1415	1617	1819	2021	2223	2425	2627	2829	3032
13	.1850	206	413	620	826	1032	1239	1450	1652	1859	2065	2271	2479	2684	2891	3097
14	.1820	210	420	630	840	1050	1259	1469	1679	1889	2099	2309	2518	2728	2938	3148
15	.1800	213	425	638	851	1064	1276	1489	1702	1914	2127	2334	2546	2759	2971	3183
16	.1770	216	432	647	863	1079	1295	1511	1726	1942	2158	2374	2590	2806	3021	3237
17	.1730	221	442	662	883	1104	1325	1546	1766	1987	2208	2429	2650	2870	3091	3313
18	.1695	226	452	678	904	1130	1356	1582	1808	2034	2260	2479	2704	2930	3155	3380
19	.1660	230	460	690	920	1151	1381	1611	1841	2071	2301	2531	2761	2991	3222	3453
20	.1610	237	475	712	949	1186	1423	1660	1898	2135	2372	2610	2847	3084	3322	3559
21	.1590	240	480	721	961	1201	1441	1681	1922	2162	2402	2644	2883	3123	3363	3604
22	.1570	243	487	730	973	1217	1460	1703	1946	2190	2433	2676	2920	3164	3406	3649
23	.1540	248	496	744	992	1240	1488	1736	1984	2232	2480	2728	2976	3224	3472	3720
24	.1520	251	503	754	1005	1257	1508	1759	2010	2262	2513	2764	3016	3267	3518	3769
25	.1495	256	511	767	1022	1276	1533	1789	2044	2300	2555	2810	3066	3322	3577	3832
26	.1470	260	520	779	1039	1299	1559	1819	2078	2338	2598	2858	3118	3378	3638	3898
27	.1440	265	531	796	1061	1327	1592	1857	2122	2388	2653	2919	3183	3448	3714	3979
28	.1405	272	544	816	1088	1360	1631	1903	2175	2447	2719	2990	3262	3534	3806	4078
29	.1360	281	562	843	1124	1405	1685	1966	2247	2528	2809	3090	33701	3651	3932	4213
30	.1285	297	595	892	1189	1487	1784	2081	2378	2676	2973	3270	3567	3864	4162	4459
31	.1200	318	637	955	1273	1592	1910	2228	2546	2865	3183	3501	3821	4138	4456	4775
32	.1160	329	659	988	1317	1647	1976	2305	2634	2964	3293	3622	3951	4281	4610	4939
33	.1130	338	676	1014	1352	1690	2028	2366	2704	3042	3380	3718	4056	4394	4732	5070
34	.1110	344	688	1032	1376	1721	2065	2409	2753	3097	3442	3785	4129	4474	4818	5162
35	.1100	347	694	1042	1389	1736	2083	2430	2778	3125	3472	3821	4167	4514	4861	5209
36	.1065	359	717	1076	1435	1794	2152	2511	2870	3228	3587	3945	4304	4663	5021	5380
37	.1040	367	735	1102	1469	1837	2204	2571	2938	3306	3673	4040	4407	4775	5142	5509
38	.1015	376	753	1129	1505	1882	2258	2634	3010	3387	3763	4140	4516	4892	5269	5645

continued on next page

**Wire Gage (continued)**

Drill Size Wire / Dec	Feet per Minute														
	10'	20'	30'	40'	50'	60'	70'	80'	90'	100'	110'	120'	130'	140'	150'
	Revolutions per Minute														
39 .0995	384	768	1152	1536	1920	2303	2687	3071	3455	3839	4222	4607	4991	5374	5758
40 .0980	390	780	1169	1559	1949	2339	2729	3118	3508	3898	4287	4677	5067	5457	5846
41 .0960	398	796	1194	1592	1990	2387	2785	3183	3581	3979	4377	4775	5172	5570	5968
42 .0935	408	817	1226	1634	2043	2451	2860	3268	3677	4085	4494	4902	5311	5719	6128
43 .0890	429	858	1288	1717	2146	2575	3004	3434	3863	4292	4721	5150	5579	6008	6438
44 .0860	444	888	1333	1777	2221	2665	3109	3554	3999	4442	4886	5330	5774	6218	6662
45 .0820	466	932	1397	1863	2329	2795	3261	3726	4192	4658	5124	5590	6056	6522	6987
46 .0810	472	943	1415	1886	2358	2830	3301	3773	4244	4716	5187	5659	6130	6602	7074
47 .0785	487	973	1460	1946	2433	2920	3406	3893	4379	4866	5352	5839	6326	6812	7299
48 .0760	503	1005	1508	2010	2513	3016	3518	4021	4523	5026	5528	6031	6534	7036	7539
49 .0730	523	1047	1570	2093	2617	3140	3663	4186	4710	5233	5756	6279	6808	7326	7849
50 .0700	546	1091	1637	2183	2729	3274	3820	4366	4911	5457	6002	6548	7094	7640	8185
51 .0670	570	1140	1710	2280	2851	3421	3991	4561	5131	5701	6271	6841	7413	798	8552
52 .0635	602	1203	1805	2406	3008	3609	4211	4812	5414	6015	6619	7218	7820	8421	9023
53 .0595	641	1283	1924	2566	3207	3848	4490	5131	5773	6414	7062	7704	8346	8988	9630
54 .0550	694	1389	2084	2778	3473	4167	4862	5556	6251	6945	7639	8334	9028	9723	10417
55 .0520	735	1469	2204	2938	3673	4408	5142	5877	6611	7346	8080	8815	9549	10284	11028
56 .0465	821	1643	2465	3286	4108	4929	5751	6572	7394	8215	9036	9857	10678	11500	12322
57 .0430	888	1777	2671	3561	4452	5342	6232	7122	8013	8903	9771	10660	11548	12436	13325
58 .0420	910	1819	2729	3637	4547	5456	6367	7275	8186	9095	10004	10913	11823	12732	13642
59 .0410	932	1863	2795	3726	4658	5590	6521	7453	8388	9316	10248	11180	12111	13043	13975
60 .0400	955	1910	2865	3820	4775	5729	6684	7639	8594	9549	10504	11459	12414	13369	14324
61 .0390	979	1959	2938	3918	4897	5876	6856	7835	8815	9794	10774	11753	12732	13712	14691
62 .0380	1005	2010	3015	4020	5025	6030	7035	8040	9045	10050	11057	12060	13068	14073	15078
63 .0370	1032	2064	3096	4128	5160	6192	7224	8256	9288	10320	11366	12398	13421	14453	15485
64 .0360	1061	2122	3183	4244	5305	6366	7427	8488	9549	10610	11671	12732	13793	14854	15915
65 .0350	1091	2182	3273	4364	5455	6546	7637	8728	9819	10910	12005	13096	14187	15279	16370
66 .0330	1158	2316	3474	4632	5790	6948	8106	9264	10422	11580	12732	13890	15047	16205	17362
67 .0320	1194	2388	3582	4776	5970	7164	8358	9552	10746	11940	13130	14324	15517	16712	17905
68 .0310	1232	2465	3696	4928	6160	7392	8624	9856	11088	12320	13554	14786	16018	17250	18482
69 .0292	1308	2616	3918	5224	6530	7836	9142	1048	11754	13060	14389	15697	17006	18314	19622
70 .0280	1364	2729	4091	5456	6820	8184	9548	10912	12276	13640	15006	16370	17734	19099	20463
71 .0260	1469	2938	4419	5892	7365	8838	10311	11784	13257	14730	16160	17629	19099	20568	22037
72 .0250	1528	3056	4584	6112	7640	9168	10696	12224	13752	15280	16807	18335	19863	21390	22918
73 .0240	1592	3183	4776	6368	7960	9552	11144	12736	14328	15920	17507	19099	20690	22282	23873
74 .0225	1698	3396	5106	6808	8510	10212	11914	13616	15318	17020	18674	20372	22069	23767	25465
75 .0210	1819	3638	5457	7276	9095	10914	12733	14552	16371	18190	20008	21827	23646	25465	27284
76 .0200	1910	3820	5730	7640	9550	11460	13370	15280	17190	19100	21008	22918	24828	26738	28648
77 .0180	2122	4244	6366	8488	10610	12732	14854	16976	19098	21220	23343	25465	27587	29709	31831
78 .0160	2388	4775	7161	9548	11935	14322	16709	19096	21483	23870	26260	28648	31035	33422	35810
79 .0145	2634	5269	7902	10536	13170	15804	18438	21072	23706	26340	28988	31611	34246	36880	39514
80 .0135	2830	5659	8490	11320	14150	16980	19810	22640	25470	28300	31123	33953	36782	39612	42441

TECHNICAL



Conversion formulas:

Inch = mm x .03937

Metric = inch x 25.4

Inch Drill Sizes

TECHNICAL

Drill Sizes	Decimal Equiv.	Screw Machine Length				Jobbers Length				Taper Length			
		flute length		overall length		flute length		overall length		flute length		overall length	
		fraction	decimal	fraction	decimal	fraction	decimal	fraction	decimal	fraction	decimal	fraction	decimal
1/64	.0156	—	—	—	—	3/16	.1875	3/4	.7500	5/16	.3125	1-1/2	1.5000
80	.0135	—	—	—	—	1/8	.1250	3/4	.7500	5/16	.3125	1-1/2	1.5000
79	.0145	—	—	—	—	1/8	.1250	3/4	.7500	5/16	.3125	1-1/2	1.5000
78	.0160	—	—	—	—	3/16	.1875	7/8	.8750	5/16	.3125	1-1/2	1.5000
77	.0180	—	—	—	—	3/16	.1875	7/8	.8750	5/16	.3125	1-1/2	1.5000
76	.0200	—	—	—	—	3/16	.1875	7/8	.8750	5/16	.3125	1-1/2	1.5000
75	.0210	—	—	—	—	1/4	.2500	1	1.0000	5/16	.3125	1-1/2	1.5000
74	.0225	—	—	—	—	1/4	.2500	1	1.0000	5/16	.3125	1-1/2	1.5000
73	.0240	—	—	—	—	5/16	.3125	1-1/8	1.1250	5/16	.3125	1-1/2	1.5000
72	.0250	—	—	—	—	5/16	.3125	1-1/8	1.1250	5/16	.3125	1-1/2	1.5000
71	.0260	—	—	—	—	3/8	.3750	1-1/4	1.2500	3/4	.7500	2	2.0000
70	.0280	—	—	—	—	3/8	.3750	1-1/4	1.2500	3/4	.7500	2	2.0000
69	.0292	—	—	—	—	1/2	.5000	1-3/8	1.3750	3/4	.7500	2	2.0000
68	.0310	—	—	—	—	1/2	.5000	1-3/8	1.3750	3/4	.7500	2	2.0000
1/32	.0312	1/2	.5000	1-3/8	1.3750	1/2	.5000	1-3/8	1.3750	3/4	.7500	2	2.0000
67	.0320	—	—	—	—	1/2	.5000	1-3/8	1.3750	3/4	.7500	2	2.0000
66	.0330	—	—	—	—	1/2	.5000	1-3/8	1.3750	3/4	.7500	2	2.0000
65	.0350	—	—	—	—	5/8	.6250	1-1/2	1.5000	3/4	.7500	2	2.0000
64	.0360	—	—	—	—	5/8	.6250	1-1/2	1.5000	3/4	.7500	2	2.0000
63	.0370	—	—	—	—	5/8	.6250	1-1/2	1.5000	3/4	.7500	2	2.0000
62	.0380	—	—	—	—	5/8	.6250	1-1/2	1.5000	3/4	.7500	2	2.0000
61	.0390	—	—	—	—	11/16	.6875	1-5/8	1.6250	1-1/8	1.1250	2-1/4	2.2500
60	.0400	1/2	.5000	1-3/8	1.3750	11/16	.6875	1-5/8	1.6250	1-1/8	1.1250	2-1/4	2.2500
59	.0410	1/2	.5000	1-3/8	1.3750	11/16	.6875	1-5/8	1.6250	1-1/8	1.1250	2-1/4	2.2500
58	.0420	1/2	.5000	1-3/8	1.3750	11/16	.6875	1-5/8	1.6250	1-1/8	1.1250	2-1/4	2.2500
57	.0430	1/2	.5000	1-3/8	1.3750	3/4	.7500	1-3/4	1.7500	1-1/8	1.1250	2-1/4	2.2500
56	.0465	1/2	.5000	1-3/8	1.3750	3/4	.7500	1-3/4	1.7500	1-1/8	1.1250	2-1/4	2.2500
3/64	.0469	1/2	.5000	1-3/8	1.3750	3/4	.7500	1-3/4	1.7500	1-1/8	1.1250	2-1/4	2.2500
55	.0520	5/8	.6250	1-5/8	1.6250	7/8	.8750	1-7/8	1.8750	1-3/4	1.7500	3	3.0000
54	.0550	5/8	.6250	1-5/8	1.6250	7/8	.8750	1-7/8	1.8750	1-3/4	1.7500	3	3.0000
53	.0595	5/8	.6250	1-5/8	1.6250	7/8	.8750	1-7/8	1.8750	1-3/4	1.7500	3	3.0000
1/16	.0625	5/8	.6250	1-5/8	1.6250	7/8	.8750	1-7/8	1.8750	1-3/4	1.7500	3	3.0000
52	.0635	11/16	.6875	1-11/16	1.6875	7/8	.8750	1-7/8	1.8750	2	2.0000	3-3/4	3.7500
51	.0670	11/16	.6875	1-11/16	1.6875	1	1.0000	2	2.0000	2	2.0000	3-3/4	3.7500
50	.0700	11/16	.6875	1-11/16	1.6875	1	1.0000	2	2.0000	2	2.0000	3-3/4	3.7500
49	.0730	11/16	.6875	1-11/16	1.6875	1	1.0000	2	2.0000	2	2.0000	3-3/4	3.7500
48	.0760	11/16	.6875	1-11/16	1.6875	1	1.0000	2	2.0000	2	2.0000	3-3/4	3.7500
5/64	.0781	11/16	.6875	1-11/16	1.6875	1	1.0000	2	2.0000	2	2.0000	3-3/4	3.7500
47	.0785	3/4	.7500	1-3/4	1.7500	1	1.0000	2	2.0000	2-1/4	2.2500	4-1/4	4.2500
46	.0810	3/4	.7500	1-3/4	1.7500	1-1/8	1.1250	2-1/8	2.1250	2-1/4	2.2500	4-1/4	4.2500
45	.0820	3/4	.7500	1-3/4	1.7500	1-1/8	1.1250	2-1/8	2.1250	2-1/4	2.2500	4-1/4	4.2500
44	.0860	3/4	.7500	1-3/4	1.7500	1-1/8	1.1250	2-1/8	2.1250	2-1/4	2.2500	4-1/4	4.2500
43	.0890	3/4	.7500	1-3/4	1.7500	1-1/4	1.2500	2-1/4	2.2500	2-1/4	2.2500	4-1/4	4.2500
42	.0935	3/4	.7500	1-3/4	1.7500	1-1/4	1.2500	2-1/4	2.2500	2-1/4	2.2500	4-1/4	4.2500
3/32	.0938	3/4	.7500	1-3/4	1.7500	1-1/4	1.2500	2-1/4	2.2500	2-1/4	2.2500	4-1/4	4.2500
41	.0960	13/16	.8125	1-13/16	1.8125	1-3/8	1.3750	2-3/8	2.3750	2-1/2	2.5000	4-5/8	4.6250
40	.0980	13/16	.8125	1-13/16	1.8125	1-3/8	1.3750	2-3/8	2.3750	2-1/2	2.5000	4-5/8	4.6250
39	.0995	13/16	.8125	1-13/16	1.8125	1-3/8	1.3750	2-3/8	2.3750	2-1/2	2.5000	4-5/8	4.6250
38	.1015	13/16	.8125	1-13/16	1.8125	1-7/16	1.4375	2-1/2	2.5000	2-1/2	2.5000	4-5/8	4.6250
37	.1040	13/16	.8125	1-13/16	1.8125	1-7/16	1.4375	2-1/2	2.5000	2-1/2	2.5000	4-5/8	4.6250
36	.1065	13/16	.8125	1-13/16	1.8125	1-7/16	1.4375	2-1/2	2.5000	2-1/2	2.5000	4-5/8	4.6250
7/64	.1094	13/16	.8125	1-13/16	1.8125	1-1/2	1.5000	2-5/8	2.6250	2-1/2	2.5000	4-5/8	4.6250
35	.1100	7/8	.8750	1-7/8	1.8750	1-1/2	1.5000	2-5/8	2.6250	2-3/4	2.7500	5-1/8	5.1250
34	.1110	7/8	.8750	1-7/8	1.8750	1-1/2	1.5000	2-5/8	2.6250	2-3/4	2.7500	5-1/8	5.1250
33	.1130	7/8	.8750	1-7/8	1.8750	1-1/2	1.5000	2-5/8	2.6250	2-3/4	2.7500	5-1/8	5.1250
32	.1160	7/8	.8750	1-7/8	1.8750	1-5/8	1.6250	2-3/4	2.7500	2-3/4	2.7500	5-1/8	5.1250

continued on next page



Conversion formulas:

Inch = mm x .03937

Metric = inch x 25.4

Inch Drill Sizes (continued)

Drill Sizes	Decimal Equiv.	Screw Machine Length				Jobbers Length				Taper Length			
		flute length		overall length		flute length		overall length		flute length		overall length	
		fraction	decimal	fraction	decimal	fraction	decimal	fraction	decimal	fraction	decimal	fraction	decimal
1/8	.1250	7/8	.8750	1-7/8	1.8750	1-5/8	1.6250	2-3/4	2.7500	2-3/4	2.7500	5-1/8	5.1250
30	.1285	15/16	.9375	1-15/16	1.9375	1-5/8	1.6250	2-3/4	2.7500	3	3.0000	5-3/8	5.3750
29	.1360	15/16	.9375	1-15/16	1.9375	1-3/4	1.7500	2-7/8	2.8750	3	3.0000	5-3/8	5.3750
28	.1405	15/16	.9375	1-15/16	1.9375	1-3/4	1.7500	2-7/8	2.8750	3	3.0000	5-3/8	5.3750
9/64	.1406	15/16	.9375	1-15/16	1.9375	1-3/4	1.7500	2-7/8	2.8750	3	3.0000	5-3/8	5.3750
27	.1440	1	1.0000	2-1/16	2.0625	1-7/8	1.8750	3	3.0000	3	3.0000	5-3/8	5.3750
26	.1470	1	1.0000	2-1/16	2.0625	1-7/8	1.8750	3	3.0000	3	3.0000	5-3/8	5.3750
25	.1495	1	1.0000	2-1/16	2.0625	1-7/8	1.8750	3	3.0000	3	3.0000	5-3/8	5.3750
24	.1520	1	1.0000	2-1/16	2.0625	2	2.0000	3-1/8	3.1250	3	3.0000	5-3/8	5.3750
23	.1540	1	1.0000	2-1/16	2.0625	2	2.0000	3-1/8	3.1250	3	3.0000	5-3/8	5.3750
5/32	.1562	1	1.0000	2-1/16	2.0625	2	2.0000	3-1/8	3.1250	3	3.0000	5-3/8	5.3750
22	.1570	1-1/16	1.0625	2-1/8	2.1250	2	2.0000	3-1/8	3.1250	3-3/8	3.3750	5-3/4	5.7500
21	.1590	1-1/16	1.0625	2-1/8	2.1250	2-1/8	2.1250	3-1/4	3.2500	3-3/8	3.3750	5-3/4	5.7500
20	.1610	1-1/16	1.0625	2-1/8	2.1250	2-1/8	2.1250	3-1/4	3.2500	3-3/8	3.3750	5-3/4	5.7500
19	.1660	1-1/16	1.0625	2-1/8	2.1250	2-1/8	2.1250	3-1/4	3.2500	3-3/8	3.3750	5-3/4	5.7500
18	.1695	1-1/16	1.0625	2-1/8	2.1250	2-1/8	2.1250	3-1/4	3.2500	3-3/8	3.3750	5-3/4	5.7500
11/64	.1719	1-1/16	1.0625	2-1/8	2.1250	2-1/8	2.1250	3-1/4	3.2500	3-3/8	3.3750	5-3/4	5.7500
17	.1730	1-1/8	1.2500	2-3/16	2.1875	2-3/16	2.1875	3-3/8	3.3750	3-3/8	3.3750	5-3/4	5.7500
16	.1770	1-1/8	1.2500	2-3/16	2.1875	2-3/16	2.1875	3-3/8	3.3750	3-3/8	3.3750	5-3/4	5.7500
15	.1800	1-1/8	1.2500	2-3/16	2.1875	2-3/16	2.1875	3-3/8	3.3750	3-3/8	3.3750	5-3/4	5.7500
14	.1820	1-1/8	1.2500	2-3/16	2.1875	2-3/16	2.1875	3-3/8	3.3750	3-3/8	3.3750	5-3/4	5.7500
13	.1850	1-1/8	1.2500	2-3/16	2.1875	2-5/16	2.3125	3-1/2	3.5000	3-3/8	3.3750	5-3/4	5.7500
3/16	.1875	1-1/8	1.2500	2-3/16	2.1875	2-5/16	2.3125	3-1/2	3.5000	3-3/8	3.3750	5-3/4	5.7500
12	.1890	1-3/16	1.1875	2-1/4	2.2500	2-5/16	2.3125	3-1/2	3.5000	3-5/8	3.6250	6	6.0000
11	.1910	1-3/16	1.1875	2-1/4	2.2500	2-5/16	2.3125	3-1/2	3.5000	3-5/8	3.6250	6	6.0000
10	.1935	1-3/16	1.1875	2-1/4	2.2500	2-7/16	2.4375	3-5/8	3.6250	3-5/8	3.6250	6	6.0000
9	.1960	1-3/16	1.1875	2-1/4	2.2500	2-7/16	2.4375	3-5/8	3.6250	3-5/8	3.6250	6	6.0000
8	.1990	1-3/16	1.1875	2-1/4	2.2500	2-7/16	2.4375	3-5/8	3.6250	3-5/8	3.6250	6	6.0000
7	.2010	1-3/16	1.1875	2-1/4	2.2500	2-7/16	2.4375	3-5/8	3.6250	3-5/8	3.6250	6	6.0000
13/64	.2031	1-3/16	1.1875	2-1/4	2.2500	2-7/16	2.4375	3-5/8	3.6250	3-5/8	3.6250	6	6.0000
6	.2040	1-1/4	1.2500	2-3/8	2.3750	2-1/2	2.5000	3-3/4	3.7500	3-5/8	3.6250	6	6.0000
5	.2055	1-1/4	1.2500	2-3/8	2.3750	2-1/2	2.5000	3-3/4	3.7500	3-5/8	3.6250	6	6.0000
4	.2090	1-1/4	1.2500	2-3/8	2.3750	2-1/2	2.5000	3-3/4	3.7500	3-5/8	3.6250	6	6.0000
3	.2130	1-1/4	1.2500	2-3/8	2.3750	2-1/2	2.5000	3-3/4	3.7500	3-5/8	3.6250	6	6.0000
7/32	.2188	1-1/4	1.2500	2-3/8	2.3750	2-1/2	2.5000	3-3/4	3.7500	3-5/8	3.6250	6	6.0000
2	.2210	1-5/16	1.3125	2-7/16	2.4375	2-5/8	2.6250	3-7/8	3.8750	3-3/4	3.7500	6-1/8	6.1250
1	.2280	1-5/16	1.3125	2-7/16	2.4375	2-5/8	2.6250	3-7/8	3.8750	3-3/4	3.7500	6-1/8	6.1250
A	.2340	1-5/16	1.3125	2-7/16	2.4375	2-5/8	2.6250	3-7/8	3.8750	3-3/4	3.7500	6-1/8	6.1250
15/64	.2344	1-5/16	1.3125	2-7/16	2.4375	2-5/8	2.6250	3-7/8	3.8750	3-3/4	3.7500	6-1/8	6.1250
B	.2380	1-3/8	1.3750	2-1/2	2.5000	2-3/4	2.7500	4	4.0000	3-3/4	3.7500	6-1/8	6.1250
C	.2420	1-3/8	1.3750	2-1/2	2.5000	2-3/4	2.7500	4	4.0000	3-3/4	3.7500	6-1/8	6.1250
D	.2460	1-3/8	1.3750	2-1/2	2.5000	2-3/4	2.7500	4	4.0000	3-3/4	3.7500	6-1/8	6.1250
1/4-E	.2500	1-3/8	1.3750	2-1/2	2.5000	2-3/4	2.7500	4	4.0000	3-3/4	3.7500	6-1/8	6.1250
F	.2570	1-7/16	1.4375	2-5/8	2.6250	2-7/8	2.8750	4-1/8	4.1250	3-3/4	3.7500	6-1/8	6.1250
G	.2610	1-7/16	1.4375	2-5/8	2.6250	2-7/8	2.8750	4-1/8	4.1250	3-3/4	3.7500	6-1/8	6.1250
17/64	.2656	1-7/16	1.4375	2-5/8	2.6250	2-7/8	2.8750	4-1/8	4.1250	3-7/8	3.8750	6-1/4	6.2500
H	.2660	1-1/2	1.5000	2-11/16	2.6875	2-7/8	2.8750	4-1/8	4.1250	3-7/8	3.8750	6-1/4	6.2500
I	.2720	1-1/2	1.5000	2-11/16	2.6875	2-7/8	2.8750	4-1/8	4.1250	3-7/8	3.8750	6-1/4	6.2500
J	.2770	1-1/2	1.5000	2-11/16	2.6875	2-7/8	2.8750	4-1/8	4.1250	3-7/8	3.8750	6-1/4	6.2500
9/32	.2812	1-1/2	1.5000	2-11/16	2.6875	2-15/16	2.9375	4-1/4	4.2500	3-7/8	3.8750	6-1/4	6.2500
K	.2812	1-1/2	1.5000	2-11/16	2.6875	2-15/16	2.9375	4-1/4	4.2500	3-7/8	3.8750	6-1/4	6.2500
L	.2900	1-9/16	1.5625	2-3/4	2.7500	2-15/16	2.9375	4-1/4	4.2500	3-7/8	3.8750	6-1/4	6.2500
M	.2950	1-9/16	1.5625	2-3/4	2.7500	3-1/16	3.0625	4-3/8	4.3750	4	4.0000	6-3/8	6.3750
19/64	.2969	1-9/16	1.5625	2-3/4	2.7500	3-1/16	3.0625	4-3/8	4.3750	4	4.0000	6-3/8	6.3750
N	.3020	1-5/8	1.6250	2-13/16	2.8125	3-1/16	3.0625	4-3/8	4.3750	4	4.0000	6-3/8	6.3750
5/16	.3125	1-5/8	1.6250	2-13/16	2.8125	3-3/16	3.1875	4-1/2	4.5000	4	4.0000	6-3/8	6.3750

continued on next page



Conversion formulas:

Inch = mm x .03937

Metric = inch x 25.4

Inch Drill Sizes (continued)

Drill Sizes	Decimal Equiv.	Screw Machine Length				Jobbers Length				Taper Length			
		flute length		overall length		flute length		overall length		flute length		overall length	
		fraction	decimal	fraction	decimal	fraction	decimal	fraction	decimal	fraction	decimal	fraction	decimal
O	.3160	1-11/16	1.6875	2-15/16	2.9375	3-3/16	3.1875	4-1/2	4.5000	4	4.0000	6-3/8	6.3750
P	.3230	1-11/16	1.6875	2-15/16	2.9375	3-5/16	3.1875	4-5/8	4.6250	4	4.0000	6-3/8	6.3750
21/64	.3281	1-11/16	1.6875	2-15/16	2.9375	3-5/16	3.1875	4-5/8	4.6250	4-1/8	4.1250	6-1/2	6.5000
Q	.3320	1-11/16	1.6875	3	3.0000	3-7/16	3.4375	4-3/4	4.7500	4-1/8	4.1250	6-1/2	6.5000
R	.3390	1-11/16	1.6875	3	3.0000	3-7/16	3.4375	4-3/4	4.7500	4-1/8	4.1250	6-1/2	6.5000
11/32	.3438	1-11/16	1.6875	3	3.0000	3-7/16	3.4375	4-3/4	4.7500	4-1/8	4.1250	6-1/2	6.5000
S	.3480	1-3/4	1.7500	3-1/16	3.0625	3-1/2	3.5000	4-7/8	4.8750	4-1/4	4.2500	6-3/4	6.7500
T	.3580	1-3/4	1.7500	3-1/16	3.0625	3-1/2	3.5000	4-7/8	4.8750	4-1/4	4.2500	6-3/4	6.7500
23/64	.3594	1-3/4	1.7500	3-1/16	3.0625	3-1/2	3.5000	4-7/8	4.8750	4-1/4	4.2500	6-3/4	6.7500
U	.3680	1-13/16	1.8125	3-1/8	3.1250	3-5/8	3.6250	5	5.0000	4-1/4	4.2500	6-3/4	6.7500
3/8	.3750	1-13/16	1.8125	3-1/8	3.1250	3-5/8	3.6250	5	5.0000	4-1/4	4.2500	6-3/4	6.7500
V	.3770	1-7/8	1.8750	3-1/4	3.2500	3-5/8	3.6250	5	5.0000	4-1/4	4.2500	6-3/4	6.7500
W	.3860	1-7/8	1.8750	3-1/4	3.2500	3-3/4	3.7500	5-1/8	5.1250	4-1/4	4.2500	6-3/4	6.7500
25/64	.3906	1-7/8	1.8750	3-1/4	3.2500	3-3/4	3.7500	5-1/8	5.1250	4-3/8	4.3750	7	7.0000
X	.3970	1-15/16	1.9375	3-5/16	3.3125	3-3/4	3.7500	5-1/8	5.1250	4-3/8	4.3750	7	7.0000
Y	.4040	1-15/16	1.9375	3-5/16	3.3125	3-7/8	3.8750	5-1/4	5.2500	4-3/8	4.3750	7	7.0000
13/32	.4062	1-15/16	1.9375	3-5/16	3.3125	3-7/8	3.8750	5-1/4	5.2500	4-3/8	4.3750	7	7.0000
Z	.4130	2	2.0000	3-3/8	3.3750	3-7/8	3.8750	5-1/4	5.2500	4-5/8	4.6250	7-1/4	7.2500
27/64	.4219	2	2.0000	3-3/8	3.3750	3-15/16	3.9375	5-3/8	5.3750	4-5/8	4.6250	7-1/4	7.2500
7/16	.4375	2-1/16	2.0625	3-7/16	3.4375	4-1/16	4.0625	5-1/2	5.5000	4-5/8	4.6250	7-1/4	7.2500
29/64	.4531	2-1/8	2.1250	3-9/16	3.5625	4-3/16	4.1875	5-5/8	5.6250	4-3/4	4.7500	7-1/2	7.5000
15/32	.4688	2-1/8	2.1250	3-5/8	3.6250	4-5/16	4.3125	5-3/4	5.7500	4-3/4	4.7500	7-1/2	7.5000
31/64	.4844	2-3/16	2.1875	3-11/16	3.6875	4-3/8	4.3750	5-7/8	5.8750	4-3/4	4.7500	7-3/4	7.7500
1/2	.5000	2-1/4	2.2500	3-3/4	3.7500	4-1/2	4.5000	6	6.0000	4-3/4	4.7500	7-3/4	7.7500
33/64	.5156	2-3/8	2.3750	3-7/8	3.8750	4-13/16	4.8125	6-5/8	6.6250	4-3/4	4.7500	8	8.0000
17/32	.5312	2-3/8	2.3750	3-7/8	3.8750	4-13/16	4.8125	6-5/8	6.6250	4-3/4	4.7500	8	8.0000
35/64	.5469	2-1/2	2.5000	4	4.0000	4-13/16	4.8125	6-5/8	6.6250	4-7/8	4.8750	8-1/4	8.2500
9/16	.5625	2-1/2	2.5000	4	4.0000	4-13/16	4.8125	6-5/8	6.6250	4-7/8	4.8750	8-1/4	8.2500
37/64	.5781	2-5/8	2.6250	4-1/8	4.1250	4-13/16	4.8125	6-5/8	6.6250	4-7/8	4.8750	8-3/4	8.7500
19/32	.5938	2-5/8	2.6250	4-1/8	4.1250	5-3/16	5.1875	7-1/8	7.1250	4-7/8	4.8750	8-3/4	8.7500
39/64	.6094	2-3/4	2.7500	4-1/4	4.2500	5-3/16	5.1875	7-1/8	7.1250	4-7/8	4.8750	8-3/4	8.7500
5/8	.6250	2-3/4	2.7500	4-1/4	4.2500	5-3/16	5.1875	7-1/8	7.1250	4-7/8	4.8750	8-3/4	8.7500
41/64	.6406	2-7/8	2.8750	4-1/2	4.5000	5-3/16	5.1875	7-1/8	7.1250	5-1/8	5.1250	9	9.0000
21/32	.6562	2-7/8	2.8750	4-1/2	4.5000	5-3/16	5.1875	7-1/8	7.1250	5-1/8	5.1250	9	9.0000
43/64	.6719	2-7/8	2.8750	4-5/8	4.6250	5-5/8	5.6250	7-5/8	7.6250	5-3/8	5.3750	9-1/4	9.2500
11/16	.6875	2-7/8	2.8750	4-5/8	4.6250	5-5/8	5.6250	7-5/8	7.6250	5-3/8	5.3750	9-1/4	9.2500
45/64	.7031	3	3.0000	4-3/4	4.7500	—	—	—	—	5-5/8	5.6250	9-1/2	9.5000
23/32	.7188	3	3.0000	4-3/4	4.7500	—	—	—	—	5-5/8	5.6250	9-1/2	9.5000
47/64	.7344	3-1/8	3.1250	5	5.0000	—	—	—	—	5-7/8	5.8750	9-3/4	9.7500
3/4	.7500	3-1/8	3.1250	5	5.0000	—	—	—	—	5-7/8	5.8750	9-3/4	9.7500
49/64	.7656	3-1/4	3.2500	5-1/8	5.1250	—	—	—	—	6	6.0000	9-7/8	9.8750
25/32	.7812	3-1/4	3.2500	5-1/8	5.1250	—	—	—	—	6	6.0000	9-7/8	9.8750
51/64	.7969	3-3/8	3.3750	5-1/4	5.2500	—	—	—	—	6-1/8	6.1250	10	10.0000
13/16	.8125	3-3/8	3.3750	5-1/4	5.2500	—	—	—	—	6-1/8	6.1250	10	10.0000
53/64	.8281	3-1/2	3.5000	5-3/8	5.3750	—	—	—	—	6-1/8	6.1250	10	10.0000
27/32	.8438	3-1/2	3.5000	5-3/8	5.3750	—	—	—	—	6-1/8	6.1250	10	10.0000
55/64	.8594	3-1/2	3.5000	5-1/2	5.5000	—	—	—	—	6-1/8	6.1250	10	10.0000
7/8	.8750	3-1/2	3.5000	5-1/2	5.5000	—	—	—	—	6-1/8	6.1250	10	10.0000
57/64	.8906	3-5/8	3.6250	5-5/8	5.6250	—	—	—	—	6-1/8	6.1250	10	10.0000
29/32	.9062	3-5/8	3.6250	5-5/8	5.6250	—	—	—	—	6-1/8	6.1250	10	10.0000
59/64	.9219	3-3/4	3.7500	5-3/4	5.7500	—	—	—	—	6-1/8	6.1250	10-3/4	10.7500
15/16	.9375	3-3/4	3.7500	5-3/4	5.7500	—	—	—	—	6-1/8	6.1250	10-3/4	10.7500
61/64	.9531	3-7/8	3.8750	5-7/8	5.8750	—	—	—	—	6-3/8	6.3750	11	11.0000
31/32	.9688	3-7/8	3.8750	5-7/8	5.8750	—	—	—	—	6-3/8	6.3750	11	11.0000
63/64	.9844	4	4.0000	6	6.0000	—	—	—	—	6-3/8	6.3750	11	11.0000
1	1.0000	4	4.0000	6	6.0000	—	—	—	—	6-3/8	6.3750	11	11.0000

**Conversion formulas:**

Inch = mm x .03937

Metric = inch x 25.4

Metric Drill Sizes

Drill Size (mm)	Decimal Equivalent (in)	Screw Machine Length DIN 1897		Jobbers Length DIN 338		Taper Length DIN 340	
		flute length	overall length	flute length	overall length	flute length	overall length
		mm	mm	mm	mm	mm	mm
0.2	.0079	1.5	19	2.5	19	—	—
0.22	.0087	1.5	19	2.5	19	—	—
0.25	.0098	1.5	19	3	19	—	—
0.28	.0110	1.5	19	3	19	—	—
0.3	.0118	1.5	19	3	19	—	—
0.32	.0126	2	19	4	19	—	—
0.35	.0138	2	19	4	19	—	—
0.38	.0150	2	19	4	19	—	—
0.4	.0157	2.5	19	5	20	—	—
0.42	.0165	2.5	19	5	20	—	—
0.45	.0177	2.5	19	5	20	—	—
0.48	.0189	2.5	19	5	20	—	—
0.5	.0197	3	20	6	22	—	—
0.52	.0205	3	20	6	22	—	—
0.55	.0217	3.5	21	7	24	—	—
0.58	.0228	3.5	21	7	24	—	—
0.6	.0236	3.5	21	7	24	—	—
0.62	.0244	4	22	8	26	—	—
0.65	.0256	4	22	8	26	—	—
0.68	.0268	4.5	23	9	28	—	—
0.7	.0276	4.5	23	9	28	—	—
0.72	.0283	4.5	23	9	28	—	—
0.75	.0295	4.5	23	9	28	—	—
0.78	.0307	5	24	10	30	—	—
0.8	.0315	5	24	10	30	—	—
0.82	.0322	5	24	10	30	—	—
0.85	.0335	5	24	10	30	—	—
0.88	.0346	5.5	25	11	32	—	—
0.9	.0354	5.5	25	11	32	—	—
0.92	.0362	5.5	25	11	32	—	—
0.95	.0374	5.5	25	11	32	—	—
0.98	.0385	6	26	12	34	—	—
1.0	.0394	6	26	12	34	33	56
1.05	.0413	6	26	12	34	—	—
1.1	.0433	7	28	14	36	37	60
1.15	.0453	7	28	14	36	—	—
1.2	.0472	8	30	16	38	41	65
1.25	.0492	8	30	16	38	—	—
1.3	.0512	8	30	16	38	41	65
1.35	.0531	9	32	18	40	—	—
1.4	.0551	9	32	18	40	45	70
1.45	.0571	9	32	18	40	—	—
1.5	.0591	9	32	18	40	45	70
1.55	.0610	10	34	20	43	—	—
1.6	.0630	10	34	20	43	50	76
1.65	.0650	10	34	20	43	—	—
1.7	.0669	10	34	20	43	50	76
1.75	.0689	11	36	22	46	—	—
1.8	.0709	11	36	22	46	53	80
1.85	.0728	11	36	22	46	—	—
1.9	.0748	11	36	22	46	53	80
1.95	.0767	12	38	24	49	—	—
2.0	.0787	12	38	24	49	56	85
2.05	.0807	12	38	24	49	—	—
2.1	.0827	12	38	24	49	56	85
2.15	.0846	13	40	27	53	—	—

continued on next page



Conversion formulas:

Inch = mm x .03937

Metric = inch x 25.4

Metric Drill Sizes (continued)

Drill Size (mm)	Decimal Equivalent (in)	Screw Machine Length DIN 1897		Jobbers Length DIN 338		Taper Length DIN 340	
		flute length	overall length	flute length	overall length	flute length	overall length
		mm	mm	mm	mm	mm	mm
2.2	.0866	13	40	27	53	59	90
2.25	.0886	13	40	27	53	—	—
2.3	.0906	13	40	27	53	59	90
2.35	.0925	13	40	27	53	—	—
2.4	.0945	14	43	30	57	62	95
2.45	.0964	14	43	30	57	—	—
2.5	.0984	14	43	30	57	62	95
2.55	.1003	14	43	30	57	—	—
2.6	.1024	14	43	30	57	62	95
2.65	.1043	14	43	30	57	—	—
2.7	.1062	16	46	33	61	66	100
2.75	.1082	16	46	33	61	—	—
2.8	.1102	16	46	33	61	66	100
2.85	.1122	16	46	33	61	—	—
2.9	.1142	16	46	33	61	66	100
2.95	.1161	16	46	33	61	—	—
3.0	.1181	16	46	33	61	66	100
3.1	.1220	18	49	36	65	69	106
3.2	.1260	18	49	36	65	69	106
3.3	.1299	18	49	36	65	69	106
3.4	.1339	20	52	39	70	73	112
3.5	.1378	20	52	39	70	73	112
3.6	.1417	20	52	39	70	73	112
3.7	.1457	20	52	39	70	73	112
3.8	.1496	22	55	43	75	78	119
3.9	.1535	22	55	43	75	78	119
4.0	.1575	22	55	43	75	78	119
4.1	.1614	22	55	43	75	78	119
4.2	.1654	22	55	43	75	78	119
4.3	.1692	24	58	47	80	82	126
4.4	.1732	24	58	47	80	82	126
4.5	.1772	24	58	47	80	82	126
4.6	.1811	24	58	47	80	82	126
4.7	.1850	24	58	47	80	82	126
4.8	.1890	26	62	52	86	87	132
5.0	.1969	26	62	52	86	87	132
5.1	.2008	26	62	52	86	87	132
5.2	.2047	26	62	52	86	87	132
5.3	.2086	26	62	52	86	87	132
5.4	.2125	28	66	57	93	91	139
5.5	.2165	28	66	57	93	91	139
5.6	.2205	28	66	57	93	91	139
5.7	.2244	28	66	57	93	91	139
5.8	.2283	28	66	57	93	91	139
5.9	.2322	28	66	57	93	91	139
6.0	.2362	28	66	57	93	91	139
6.1	.2401	31	70	63	101	97	148
6.2	.2440	31	70	63	101	97	148
6.3	.2480	31	70	63	101	97	148
6.4	.2520	31	70	63	101	97	148
6.5	.2559	31	70	63	101	97	148
6.6	.2598	31	70	63	101	97	148
6.7	.2638	31	70	63	101	97	148
6.8	.2677	34	74	69	109	102	156
6.9	.2717	34	74	69	109	102	156
7.0	.2756	34	74	69	109	102	156

continued on next page

**Conversion formulas:**

Inch = mm x .03937

Metric = inch x 25.4

Metric Drill Sizes (continued)

Drill Size (mm)	Decimal Equivalent (in)	Screw Machine Length DIN 1897		Jobbers Length DIN 338		Taper Length DIN 340	
		flute length	overall length	flute length	overall length	flute length	overall length
		mm	mm	mm	mm	mm	mm
7.1	.2795	34	74	69	109	102	156
7.2	.2835	34	74	69	109	102	156
7.3	.2874	34	74	69	109	102	156
7.4	.2913	34	74	69	109	102	156
7.5	.2953	34	74	69	109	102	156
7.6	.2992	37	79	75	117	109	165
7.7	.3031	37	79	75	117	109	165
7.8	.3070	37	79	75	117	109	165
7.9	.3110	37	79	75	117	109	165
8.0	.3150	37	79	75	117	109	165
8.1	.3189	37	79	75	117	109	165
8.2	.3228	37	79	75	117	109	165
8.3	.3267	37	79	75	117	109	165
8.4	.3307	37	79	75	117	109	165
8.5	.3346	37	79	75	117	109	165
8.6	.3386	40	84	81	125	115	175
8.7	.3425	40	84	81	125	115	175
8.8	.3464	40	84	81	125	115	175
8.9	.3503	40	84	81	125	115	175
9.0	.3543	40	84	81	125	115	175
9.1	.3582	40	84	81	125	115	175
9.2	.3622	40	84	81	125	115	175
9.3	.3661	40	84	81	125	115	175
9.4	.3700	40	84	81	125	115	175
9.5	.3740	40	84	81	125	115	175
9.6	.3779	43	89	87	133	121	184
9.7	.3817	43	89	87	133	121	184
9.8	.3858	43	89	87	133	121	184
9.9	.3897	43	89	87	133	121	184
10.0	.3937	43	89	87	133	121	184
10.1	.3976	43	89	87	133	121	184
10.2	.4016	43	89	87	133	121	184
10.3	.4055	43	89	87	133	121	184
10.4	.4094	43	89	87	133	121	184
10.5	.4134	43	89	87	133	121	184
10.6	.4173	43	89	87	133	121	184
10.7	.4212	47	95	94	142	128	195
10.8	.4252	47	95	94	142	128	195
10.9	.4291	47	95	94	142	128	195
11.0	.4331	47	95	94	142	128	195
11.1	.4370	47	95	94	142	128	195
11.2	.4409	47	95	94	142	128	195
11.3	.4448	47	95	94	142	128	195
11.4	.4488	47	95	94	142	128	195
11.5	.4527	47	95	94	142	128	195
11.6	.4566	47	95	94	142	128	195
11.7	.4606	47	95	94	142	128	195
11.8	.4645	47	95	94	142	128	195
11.9	.4685	51	102	101	151	134	205
12.0	.4724	51	102	101	151	134	205
12.1	.4763	51	102	101	151	134	205
12.2	.4823	51	102	101	151	134	205
12.3	.4842	51	102	101	151	134	205
12.4	.4881	51	102	101	151	134	205
12.5	.4921	51	102	101	151	134	205
12.6	.4960	51	102	101	151	134	205

continued on next page



Conversion formulas:


Inch = mm x .03937

Metric = inch x 25.4

Metric Drill Sizes (continued)


Drill Size (mm)	Decimal Equivalent (in)	Screw Machine Length DIN 1897		Jobbers Length DIN 338		Taper Length DIN 340	
		flute length mm	overall length mm	flute length mm	overall length mm	flute length mm	overall length mm
12.7	.5000	51	102	101	151	134	205
12.8	.5039	51	102	101	151	134	205
12.9	.5078	51	102	101	151	134	205
13.0	.5118	51	102	101	151	134	205
13.1	.5157	51	102	101	151	134	205
13.2	.5197	51	102	101	151	134	205
13.3	.5236	54	107	108	160	140	214
13.4	.5118	54	107	108	160	140	214
13.5	.5315	54	107	108	160	140	214
13.6	.5354	54	107	108	160	140	214
13.7	.5394	54	107	108	160	140	214
13.8	.5433	54	107	108	160	140	214
13.9	.5472	54	107	108	160	140	214
14.0	.5512	54	107	108	160	140	214
14.25	.5610	56	111	114	169	144	220
14.5	.5709	56	111	114	169	144	220
14.75	.5807	56	111	114	169	144	220
15.0	.5906	56	111	114	169	144	220
15.25	.6004	58	115	120	178	149	227
15.5	.6102	58	115	120	178	149	227
15.75	.6201	58	115	120	178	149	227
16.0	.6299	58	115	120	178	149	227

Shank / Tang



Shank Diameter (inches)		Tang Dimensions (inches)	
from	to	A width	B length
1/8	3/16	.092	9/32
over 3/16	1/4	.120	5/16
over 1/4	5/16	.160	11/32
over 5/16	3/8	.201	3/8
over 3/8	15/32	.241	7/16
over 15/32	9/16	.300	1/2
over 9/16	21/32	.370	9/16
over 21/32	3/4	.440	5/8
over 3/4	7/8	.511	11/16
over 7/8	1	.605	3/4
over 1-3/16	1-3/8	.813	7/8



Morse Taper Shank



morse taper shank number	taper per foot	taper per inch	D5 maximum shank dia.	LS length of shank	Lx length of shank to gage line	Lz length of tang	W thickness of tang	R radius
1	.5985	.0498	.475	2.56	2.44	.37	.20	.19
2	.5994	.0499	.700	3.12	2.94	.44	.25	.25
3	.6023	.0501	.938	3.87	3.69	.56	.31	.28
4	.6232	.0519	1.231	4.87	4.62	.62	.47	.31
5	.6315	.0526	1.749	6.12	5.87	.75	.62	.37
6	.6256	.0521	2.494	8.56	8.25	1.12	.75	.50



Straight Shank Chucking Reamer Dimensions

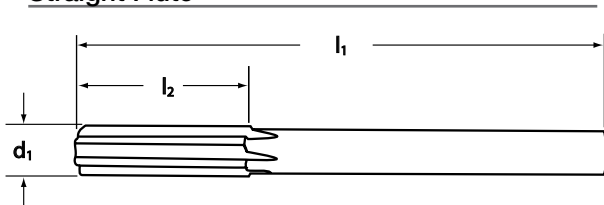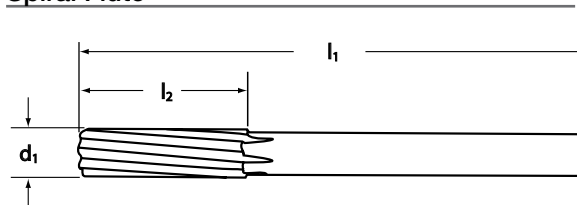
TECHNICAL
Straight Flute

Spiral Flute


decimal size range		reamer dia d ₁ (in)		overall length	flute length	no. of flutes
min	max	max	min	l ₁ (in)	l ₂ (in)	
.0394	.0460	.0390	.0380	2.500	.500	4
.0461	.0515	.0455	.0445	2.500	.500	4
.0516	.0590	.0510	.0500	2.500	.500	4
.0591	.0635	.0585	.0575	2.500	.500	4
.0636	.0665	.0585	.0575	3.000	.750	4
.0666	.0755	.0660	.0650	3.000	.750	4
.0756	.0805	.0720	.0710	3.000	.750	4
.0806	.0855	.0771	.0761	3.000	.750	4
.0856	.0930	.0810	.0800	3.000	.750	4
.0931	.0938	.0880	.0870	3.000	.750	4
.0939	.0955	.0880	.0870	3.500	.875	4
.0956	.1005	.0928	.0918	3.500	.875	4
.1006	.1060	.0950	.0940	3.500	.875	4
.1061	.1105	.1030	.1020	3.500	.875	4
.1106	.1155	.1055	.1045	3.500	.875	4
.1156	.1160	.1120	.1110	3.500	.875	4
.1161	.1225	.1120	.1110	3.500	.875	6
.1226	.1285	.1190	.1180	3.500	.875	6
.1286	.1355	.1190	.1180	4.000	1.000	6
.1356	.1400	.1275	.1265	4.000	1.000	6
.1401	.1465	.1350	.1340	4.000	1.000	6
.1466	.1515	.1430	.1420	4.000	1.000	6
.1516	.1560	.1460	.1450	4.000	1.000	6
.1561	.1570	.1510	.1500	4.000	1.000	6
.1571	.1585	.1510	.1500	4.500	1.125	6
.1586	.1655	.1530	.1520	4.500	1.125	6
.1656	.1715	.1595	.1585	4.500	1.125	6
.1716	.1765	.1645	.1635	4.500	1.125	6
.1766	.1795	.1704	.1694	4.500	1.125	6
.1796	.1845	.1755	.1745	4.500	1.125	6

decimal size range		reamer dia d ₁ (in)		overall length	flute length	no. of flutes
min	max	max	min	l ₁ (in)	l ₂ (in)	
.1846	.1890	.1805	.1795	4.500	1.125	6
.1891	.1905	.1805	.1795	5.000	1.250	6
.1906	.1955	.1860	.1850	5.000	1.250	6
.1956	.2005	.1895	.1885	5.000	1.250	6
.2006	.2050	.1945	.1935	5.000	1.250	6
.2051	.2125	.2016	.2006	5.000	1.250	6
.2126	.2188	.2075	.2065	5.000	1.250	6
.2189	.2205	.2075	.2065	6.000	1.500	6
.2206	.2335	.2173	.2163	6.000	1.500	6
.2336	.2375	.2265	.2255	6.000	1.500	6
.2376	.2475	.2329	.2319	6.000	1.500	6
.2476	.2530	.2405	.2395	6.000	1.500	6
.2531	.2840	.2485	.2475	6.000	1.500	6
.2841	.3438	.2792	.2782	6.000	1.500	6
.3439	.4062	.3105	.3095	7.000	1.750	6
.4063	.4688	.3730	.3720	7.000	1.750	6
.4689	.5010	.4355	.4345	8.000	2.000	6
.5011	.6000	.4355	.4345	8.000	2.000	8
.6001	.7230	.5620	.5605	9.000	2.250	8
.7231	.8490	.6245	.6230	9.500	2.500	8
.8491	.9740	.7495	.7480	10.000	2.625	8
.9741	1.0000	.8745	.8730	10.500	2.750	8
1.0001	1.0625	.8745	.8730	10.500	2.750	10
1.0626	1.1250	.8745	.8730	11.000	2.875	10
1.1251	1.1875	.9995	.9980	11.000	2.875	10
1.1876	1.3125	.9995	.9980	11.500	3.000	10
1.3126	1.3750	.9995	.9980	12.000	3.250	10
1.3751	1.4375	1.2495	1.2480	12.000	3.250	10
1.4376	1.5000	1.2495	1.2480	12.500	3.500	12

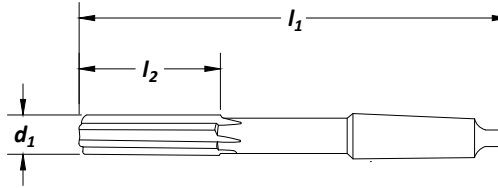

Taper Shank Chucking Reamers - Straight Flute



diameter size range d ₁ (in)		overall length l ₁ (in)	flute length l ₂ (in)	morse taper shank number	no. of flutes
min	max				
.1750	.1890	4.500	1.125	1	6
.1891	.2041	5.000	1.250	1	6
.2042	.2188	5.000	1.250	1	6
.2189	.2630	6.000	1.500	1	6
.2531	.2840	6.000	1.500	1	6
.2841	.3135	6.000	1.500	1	6
.3136	.3438	6.000	1.500	1	6
.3439	.3770	7.000	1.750	1	6
.3771	.4062	7.000	1.750	1	6
.4063	.4385	7.000	1.750	1	6
.4386	.4688	7.000	1.750	1	6
.4689	.5010	8.000	2.000	1	6
.5011	.5330	8.000	2.000	1	8
.5331	.5635	8.000	2.000	1	8
.5636	.5938	8.000	2.000	1	8
.5939	.6260	9.000	2.250	2	8
.6261	.6719	9.000	2.250	2	8
.6720	.7230	9.000	2.250	2	8
.7231	.7656	9.500	2.500	2	8
.7657	.8125	9.500	2.500	2	8
.8126	.8490	9.500	2.500	2	8
.8491	.9062	1.000	2.625	2	8
.9063	.9740	1.000	2.625	3	8
.9741	1.0000	1.500	2.750	3	8
1.0001	1.0625	1.500	2.750	3	10
1.0626	1.1250	11.000	2.875	3	10
1.1251	1.1875	11.000	2.875	3	10
1.1876	1.2500	11.500	3.000	4	10
1.2501	1.3125	11.500	3.000	4	10
1.3126	1.3750	12.000	3.250	4	10
1.3751	1.4375	12.000	3.250	4	10
1.4376	1.5000	12.500	3.500	4	12



Reaming Speeds

Speeds for machine reaming may vary considerably depending in part on the material to be reamed, type of machine, and required finish and accuracy. In general most machine reaming is done at about 2/3 the speed used for drilling the same material. Speeds for reaming are shown on pages 128-129.

Reaming Feeds

Feeds for reaming are usually much higher than those used for drilling, often running 200% to 300% of drill feeds. Too low a feed may result in excessive reamer wear. At all times it is necessary that the feed be high enough to permit the reamer to cut rather than to rub or burnish. Too high a feed may tend to reduce the accuracy of the hole and may also lower the quality of the finish. The basic idea is to use as high a feed as possible and still produce the required finish and accuracy.


Stock to be Removed

For the same reason, insufficient stock for reaming may result in a burnishing rather than a cutting action. It is difficult to generalize on this phase as it is tied in closely with type of material, feed, finish required, depth of hole, and chip capacity of the reamer. For machine reaming, 0.010" on a 1/4" hole, 0.015" on a 1/2" hole, up to 0.025" on a 1-1/2" hole, seems a good starting point. For hand reaming, stock allowances are much smaller, partly because of the difficulty in forcing the reamer through greater stock. A common allowance is 0.001" to 0.003".

American National Standard Reamer Taper (Morse Taper) Dimensions

Taper No.	Depth of Hole	
	A <i>Drilled</i>	B <i>Reamed</i>
0*	2-1/16	2-1/32
1	2-3/16	2-5/32
2	3-1/8	2-15/16
3	3-7/8	3-11/16
4	4-7/8	4-5/8
4-1/2	5-1/8	4-5/8
5	6-1/8	5-7/8
6	8-9/16	8-1/4
7	11-5/8	11-1/4

*Size 0 taper shank not listed in American National Standards.

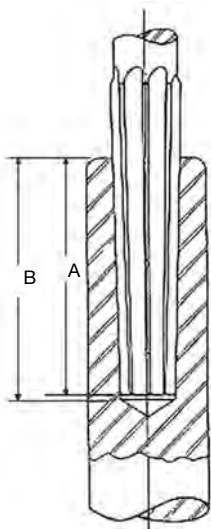

Alignment

In the ideal reaming job, the spindle, reamer, bushing, and hole to be machined are all in perfect alignment. Any variation from this tends to increase reamer wear and detracts from the accuracy of the hole. Tapered, oversize, or bell-mouthed holes should call for a check of alignment. Sometimes the bad effects of misalignment can be reduced through the use of floating or adjustable holders. Quite often if the user will grind a slight back taper on the reamer it will also be of help in overcoming the effects of misalignment.

Chatter

The presence of chatter while reaming has a very bad effect on reamer life and on the finish in the hole. Chatter may be the result of one of several causes, some of which are listed:

- Excessive speed.
- Too much clearance on reamer.
- Lack of rigidity in jig or machine.
- Insecure holding of work.
- Excessive overhang of reamer or spindle.
- Excessive looseness in floating holder.
- Too light a feed.


Correcting the cause can materially increase both reamer life and the quality of the reamed holes.

Coolant

In reaming, the emphasis is usually on finish, and a coolant is normally chosen for this purpose rather than for cooling. Quite often this means a change from that recommended for drilling as shown on page 2, but in general this list will be found satisfactory.

Reamer Stock Removal

Stock removal is dependent on material, feed, and finish required. The stock removal chart below illustrates starting points for various diameters when using machine and chucking reamers.

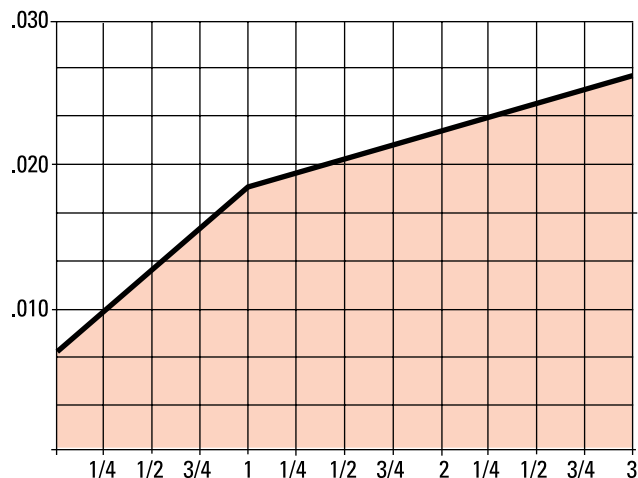

**Reamer Diameter Tolerances**

Reamer Diameter inches	+	+
	inches	inches
through 1/2	.0001	.0004
over 1/2 through 1	.0001	.0005
over 1	.0002	.0006
	+	-
dowel pin sizes	.0000	(.0002)

Reamer Overall Length and Flute Length Tolerances

Reamer Diameter inches	+	-
	inches	inches
3/64 through 1	.0625	.0625
over 1 through 2	.0938	.0938
over 2 through 3	.1250	.1250

Reamer Lip Height Tolerances

Reamer Diameter inches	Total Indicator Variation inches
through 1/8	.0010
1/8 through 1/4	.0012
over 1/4 through 1/2	.0015
over 1/2 through 1	.0020
over 1 through 3-1/2	.0025

Reamer Straight Shank Diameter Tolerances

Reamer Diameter	+	-
	inches	inches
Tool Style 4001, 4030		
.0390 to .4335	.0000	.0010
.4396 to 1.2495	.0000	.0015
Tool Style 657, 659		
.0781 to .6250	.0010	.0050
Tool Style 650		
.0781 to .6250	.0005	.0020

Reamer Regrinding

In obtaining maximum economy from reamers the same principles apply as in the case of most other cutting tools. One of these principles is not to allow a tool to become too dull. It is best to regrind the chamfer on a reamer long before it exhibits excessive wear or refuses to cut. This sharpening is usually restricted to the entering taper or chamfer. It can be done on almost any tool and cutter grinder. Care must be taken so that each flute is ground exactly even or the tool is apt to cut oversize.

Sharpening the chamfer on a reamer by hand is not recommended as it is practically impossible to keep the cutting edges even.


The following figures show three common types of grinds used on reamers:

In grinding down a reamer to special size it is usually necessary to relieve or clear the lands. No hard or fast rule may be given as to the amount of this clearance but the following table may be of help:


Size of Reamer	Circular Land Width	Primary Clearance
1/4"	.007	14°
1/2"	.009	11°
1"	.013	9°
1-1/2"	.016	7°
2"	.023	7°

Figure A


Ordinary reamer grind for most jobs.

**Figure B**


Hand reamer grind also used on some machine reamer applications to obtain required finish or tolerance.

**Figure C**

Semi-finish reamer grind to straighten out bent or misaligned holes. Corners must be kept sharp.

**Figure D**

A secondary clearance is often ground on reamers as shown in Fig. D. This clearance is only to insure the back of the land being well away from the wall of the reamed hole in order to prevent rubbing.





Fractional Sizes

Drill Size Fraction / Dec	Feet per Minute														
	10'	20'	30'	40'	50'	60'	70'	80'	90'	100'	110'	120'	130'	140'	150'
	Revolutions Per Minute														
1/16 .0625	403	807	1210	1614	2017	2420	2823	3227	3663	4033	4437	4840	5244	5647	6050
1/8 .1250	202	403	605	807	1008	1210	1412	1614	1815	2017	2218	2420	2622	2823	3025
3/16 .1875	135	269	403	538	673	807	941	1076	1210	1344	1479	1614	1748	1882	2017
1/4 .2500	101	202	302	403	504	605	706	807	908	1008	1109	1210	1311	1412	1513
5/16 .3125	81	161	242	323	403	484	565	645	726	807	888	968	1049	1129	1210
3/8 .3750	67	135	202	269	336	403	471	538	605	673	739	807	874	941	1008
7/16 .4375	57	116	173	230	288	346	403	461	519	576	634	692	749	807	865
1/2 .5000	50	101	151	202	252	302	353	403	454	504	554	605	655	706	756
5/8 .6250	40	81	121	161	202	242	282	323	363	403	444	484	524	565	605
3/4 .7500	34	67	101	134	168	202	236	269	302	336	370	403	437	471	504
7/8 .8750	29	57	86	116	144	173	202	230	259	288	317	346	375	403	432
1 1.0000	25	50	76	101	126	151	176	202	227	252	277	302	328	353	378
1-1/8 1.1250	22	45	67	90	112	135	157	180	202	224	246	269	291	314	336
1-1/4 1.2500	20	40	61	81	101	121	141	161	182	202	222	242	262	282	302
1-3/8 1.3750	18	37	55	73	92	110	128	147	165	183	202	220	238	257	275
1-1/2 1.5000	17	34	50	67	84	101	117	135	151	168	185	202	218	236	252
1-5/8 1.6250	16	31	46	62	77	93	109	124	140	155	171	186	202	217	233
1-3/4 1.7500	15	29	43	57	72	86	101	116	129	144	158	173	187	202	216
1-7/8 1.8750	13	27	40	53	67	81	94	108	121	135	148	161	175	188	202
2 2.0000	13	25	38	50	63	76	88	101	114	126	139	151	164	176	189
2-1/4 2.2500	11	22	34	45	56	67	79	90	101	112	123	135	146	157	168
2-1/2 2.5000	10	20	30	40	50	61	71	81	90	101	111	121	131	141	151
2-3/4 2.7500	9	18	28	37	46	55	64	73	83	92	101	110	119	128	137
3 3.0000	9	17	25	34	42	50	59	67	76	84	92	101	110	117	126

Letter Sizes

Drill Size Letter / Dec	Feet per Minute														
	10'	20'	30'	40'	50'	60'	70'	80'	90'	100'	110'	120'	130'	140'	150'
	Revolutions Per Minute														
A .2340	108	215	324	432	540	648	756	864	972	1080	1185	1293	1401	1508	1616
B .2380	106	212	318	424	530	636	742	847	954	1059	1165	1271	1377	1483	1589
C .2420	104	209	312	416	521	625	729	833	937	1041	1146	1250	1354	1459	1563
D .2460	102	205	308	411	513	616	719	822	924	1027	1127	1230	1332	1435	1537
E .2500	101	202	302	403	504	605	706	807	908	1008	1109	1210	1299	1412	1513
F .2570	98	196	294	392	490	589	686	785	882	981	1079	1177	1275	1373	1471
G .2610	96	193	290	386	483	579	676	772	869	966	1063	1159	1256	1352	1449
H .2660	95	189	284	379	474	569	663	758	853	948	1043	1137	1232	1327	1422
I .2720	92	185	278	371	463	556	649	741	834	927	1020	1112	1205	1298	1390
J .2770	91	182	273	364	455	546	637	728	819	910	1001	1092	1183	1274	1365
K .2810	90	180	269	359	449	538	628	717	807	897	987	1076	1166	1256	1346
L .2900	87	174	261	348	435	521	609	696	782	869	956	1043	1130	1217	1304
M .2950	85	171	257	342	428	513	599	684	770	855	940	1026	1111	1197	1282
N .3020	83	167	251	334	418	501	585	668	752	835	918	1002	1085	1169	1252
O .3160	80	160	240	319	399	479	558	638	718	798	878	957	1037	1117	1197
P .3230	78	156	234	312	391	469	546	624	703	781	859	937	1014	1094	1171
Q .3320	76	152	228	304	380	455	531	607	683	759	836	913	987	1063	1139
R .3390	75	149	223	298	372	446	521	595	669	744	818	894	967	1041	1115
S .3480	73	145	217	290	362	435	508	579	652	725	797	869	942	1014	1086
T .3580	71	141	211	281	352	422	492	563	633	704	774	845	915	986	1056
U .3680	69	137	205	274	343	411	480	548	616	685	754	822	890	959	1028
V .3770	67	134	201	267	335	401	468	535	602	669	735	805	869	936	1003
W .3860	65	131	196	261	327	392	457	523	588	653	718	784	849	914	979
X .3970	63	127	191	254	317	380	444	508	571	635	698	762	826	889	952
Y .4040	63	125	187	249	312	374	437	499	562	624	686	749	811	874	936
Z .4130	61	122	183	244	305	366	427	488	549	611	671	733	793	855	915



Reamer Cutting Speeds

Wire Gauge Sizes


Drill Size Wire / Dec	Feet per Minute														
	10'	20'	30'	40'	50'	60'	70'	80'	90'	100'	110'	120'	130'	140'	150'
	Revolutions Per Minute														
1 .2280	111	221	332	442	553	663	774	884	995	1106	1216	1327	1438	1548	1659
2 .2210	114	228	342	456	570	684	799	912	1026	1140	1255	1369	1483	1597	1711
3 .2130	118	237	355	473	592	710	828	946	1065	1183	1303	1420	1538	1657	1775
4 .2090	121	241	362	482	603	724	845	965	1086	1206	1327	1447	1568	1690	1809
5 .2055	123	246	368	491	614	736	859	981	1104	1227	1350	1472	1595	1717	1840
6 .2040	123	247	371	494	618	741	865	989	1112	1236	1360	1483	1606	1730	1854
7 .2010	125	251	376	502	627	752	878	1003	1129	1254	1379	1505	1630	1756	1881
8 .1990	127	253	380	507	634	760	886	1013	1140	1267	1393	1520	1647	1773	1900
9 .1960	129	257	386	515	644	772	900	1029	1158	1286	1415	1544	1672	1800	1929
10 .1935	130	261	391	521	651	781	912	1042	1173	1303	1433	1564	1694	1824	1954
11 .1910	132	264	396	528	660	792	924	1056	1188	1320	1452	1584	1716	1848	1981
12 .1890	133	267	400	533	667	801	934	1067	1201	1334	1467	1601	1734	1867	2001
13 .1850	136	273	409	545	681	818	957	1090	1227	1363	1499	1636	1771	1908	2044
14 .1820	139	277	416	554	693	831	970	1108	1247	1385	1524	1662	1800	1939	2078
15 .1800	141	281	421	562	702	842	983	1123	1263	1404	1540	1680	1821	1961	2101
16 .1770	143	285	427	570	712	855	997	1139	1282	1424	1567	1709	1852	1994	2136
17 .1730	146	292	437	583	729	875	1020	1166	1311	1457	1603	1749	1894	2040	2187
18 .1695	149	298	447	597	746	895	1044	1193	1342	1492	1636	1785	1934	2082	2231
19 .1660	152	304	455	607	760	911	1063	1215	1367	1519	1670	1822	1974	2127	2279
20 .1610	156	314	470	626	783	939	1096	1253	1409	1566	1723	1879	2035	2193	2349
21 .1590	158	317	476	634	793	951	1109	1269	1427	1585	1745	1903	2061	2220	2379
22 .1570	160	321	482	642	803	964	1124	1284	1445	1606	1766	1927	2088	2248	2408
23 .1540	164	327	491	655	818	982	1146	1309	1473	1637	1800	1964	2128	2292	2455
24 .1520	166	332	498	663	830	995	1161	1327	1493	1659	1824	1991	2156	2322	2488
25 .1495	169	337	506	675	842	1012	1181	1349	1518	1686	1855	2024	2193	2361	2529
26 .1470	172	343	514	686	857	1029	1201	1371	1543	1715	1886	2058	2229	2401	2573
27 .1440	175	350	525	700	876	1051	1226	1401	1576	1751	1927	2101	2276	2451	2626
28 .1405	180	359	539	718	898	1076	1256	1436	1615	1795	1973	2153	2332	2512	2691
29 .1360	185	371	556	742	927	1112	1298	1483	1668	1854	2039	22243	2410	2595	2781
30 .1285	196	393	589	785	981	1177	1373	1569	1766	1962	2158	2354	2550	2747	2943
31 .1200	210	420	630	840	1051	1261	1470	1680	1891	2101	2311	2522	2731	2941	3152
32 .1160	217	435	652	869	1087	1304	1521	1738	1956	2173	2391	2608	2825	3043	3260
33 .1130	223	446	669	892	1115	1338	1562	1785	2008	2231	2454	2677	2900	3123	3346
34 .1110	227	454	681	908	1136	1363	1590	1817	2044	2272	2498	2725	2953	3180	3407
35 .1100	229	458	688	917	1146	1375	1604	1833	2063	2292	2522	2750	2979	3208	3438
36 .1065	237	473	710	947	1184	1420	1657	1894	2130	2367	2604	2841	3078	3314	3551
37 .1040	242	485	727	970	1212	1455	1697	1939	2182	2424	2666	2909	3152	3394	3636
38 .1015	248	497	745	993	1242	1490	1738	1987	2235	2484	2732	2981	3229	3478	3726
39 .0995	253	507	760	1014	1267	1520	1773	2027	2280	2534	2787	3041	3294	3547	3800
40 .0980	257	515	772	1029	1286	1544	1801	2058	2315	2573	2829	3087	3344	3602	3858
41 .0960	263	525	788	1051	1313	1575	1838	2101	2363	2626	2889	3152	3414	3676	3939
42 .0935	269	539	809	1078	1348	1618	1888	2157	2427	2696	2966	3235	3505	3775	4044
43 .0890	283	566	850	1133	1416	1700	1983	2266	2550	2833	3116	3399	3682	3965	4249
44 .0860	293	586	880	1173	1466	1759	2052	2346	2639	2932	3225	3518	3811	4104	4397
45 .0820	308	615	922	1230	1537	1845	2152	2459	2767	3074	3382	3689	3997	4305	4611
46 .0810	312	622	934	1245	1556	1868	2179	2490	2801	3113	3423	3735	4046	4357	4669
47 .0785	321	642	964	1284	1606	1927	2248	2569	2890	3212	3532	3854	4175	4496	4817
48 .0760	332	663	995	1327	1659	1991	2322	2654	2985	3317	3648	3980	4312	4644	4976
49 .0730	345	691	1036	1381	1727	2072	2418	2763	3109	3454	3799	4144	4493	4835	5180
50 .0700	360	720	1080	1441	1801	2161	2521	2882	3241	3602	3961	4322	4682	5042	5402
51 .0670	376	752	1129	1505	1882	2258	2634	3010	3386	3763	4139	4515	4893	527	5644
52 .0635	397	794	1191	1588	1985	2382	2779	3176	3573	3970	4369	4764	5161	5558	5955
53 .0595	423	847	1270	1694	2117	2540	2963	3386	3810	4233	4661	5085	5508	5932	6356
54 .0550	458	917	1375	1833	2292	2750	3209	3667	4126	4584	5042	5500	5958	6417	6875
55 .0520	485	970	1455	1939	2424	2909	3394	3879	4363	4848	5333	5818	6302	6787	7278
56 .0465	542	1084	1627	2169	2711	3253	3796	4338	4880	5422	5964	6506	7047	7590	8133
57 .0430	586	1173	1763	2350	2938	3526	4113	4701	5289	5876	6464	7056	7622	8208	8795
58 .0420	601	1201	1801	2400	3001	3601	4202	4802	5403	6003	6603	7203	7803	8403	9004
59 .0410	615	1230	1845	2459	3074	3689	4304	4919	5536	6149	6764	7379	7993	8608	9224
60 .0400	630	1261	1891	2521	3152	3781	4411	5042	5672	6302	6933	7563	8193	8824	9454

OTHER TOOLS. . . . [D-137](#)

TECH TIPS

- Use Screw Extractors to
Remove Broken Screws and Bolts. [D-138](#)
- Ground Tool Bits. [D-139](#)
- Drill and Reamer Blanks. [D-141](#)



					Tool Material				Application						
					HSS	Cobalt	Carbide	TCT	Steel	Stainless	Cast Iron	Non-Ferrous	High-Temp Alloy	Hardened Steel	
Style	Page	Product	Type	Set											
OTHER TOOLS															
192	D-138	Screw Extractor		Ezy-Out®	yes	•				•		•			
850	D-139	Tool Bits		Square		•				•		•			
855				Square			•				•		•		
860				Square			•				•		•		
851				Rectangular		•				•		•			
856	D-140			Rectangular			•				•		•		
861	Rectangular					•				•		•			
902	D-141	Blanks		Oversize		•				•		•			
903				Undersize		•				•		•			
CASE	D-142	Metal Cases		Empty											

Material Icons

Material Reference	Icon Reference		P		M		K		N		S		H	
	Type		Steel (HRc)		Stainless Steel		Cast Iron (HRc)		Aluminum and Non-Ferrous		Hi-Temp Alloy		Hardened Steel (HRc)	
			Low Carbon		Alloy		Gray		Nodular		Ni, Co, Fe Based Super Alloy		Titanium	
	Hardness		13-38	>38	16-38	> 38	300 Series	400 series	PH	18-22	22-32			>45

OTHER TOOLS

Ezy-Out® Screw Extractor

Style: 192




extractor number	small end inch	large end inch	overall length inch	screw size	pipe size	use this drill size	order number 192
#1	.054	.156	2.000	#8 - 1/4	--	5/64	C53651
#2	.080	.188	2.375	#12 - 5/16	--	7/64	C53652
#3	.125	.250	2.688	5/16 - 7/16	--	5/32	C53653
#4	.188	.328	2.875	7/16 - 9/16	--	1/4	C53654
#5	.250	.438	3.375	9/16 - 3/4	1/8, 1/4	9/32	C53655
#5-1/4	.343	.531	3.375	11/16 - 15/16	1/4	23/64	C53669
#6	.375	.594	3.750	3/4 - 1	3/8	13/32	C53656
#6-3/8	.468	.687	3.750	15/16 - 1-1/8	3/8	31/64	C53670
#7	.500	.750	4.125	1 - 1-3/8	1/2	17/32	C53657
#7-1/2	.593	.875	4.125	1-1/8 - 1-1/2	1/2	39/64	C53671
#8	.750	1.000	4.375	1-3/8 - 1-3/4	3/4	13/16	C53658
#9	1.000	1.281	4.625	1-3/4 - 2-1/8	1	1-1/16	C53659
#10	1.250	1.563	5.000	2-1/8 - 2-1/2	1-1/4	1-5/16	C53660
#11	1.500	1.875	5.625	2-1/2 - 3	1-1/2	1-9/16	C53661
#12	1.875	2.313	6.250	3 - 3-1/2	2	1-15/16	C53662

NOTE: Recommended drill size and extractor size shown above are for normal conditions. Unusual conditions will require the use of other size extractors and drills, depending on the length of the broken section and the depth of the hole. In general, use the largest possible screw extractor.

SET Ezy-Out® Screw Extractor Set
Style: 192


number of pieces	sizes	order number 192
5	#1, 2, 3, 4, and 5	C00906
6	#1, 2, 3, 4, 5, and 6	C00907
3	#4, 5, and 6	C00909
4	#5, 5-1/4, 6-3/8, and 7-1/2	C00917
6	#5, 5-1/4, 6-3/8, 7-1/2, 8, and 9	C00918
4	#6, 7, 8, and 9	C00908
12	#1, 2, 3, 4, 5, and 6 plus drills 5/64", 7/64", 5/32", 1/4", 9/32", 13/32"	C00910

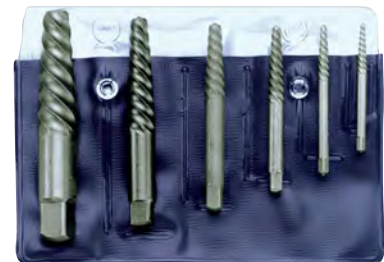


TECH TIPS

Use Screw Extractors to Remove Broken Screws and Bolts

Screw extractors are often used in maintenance departments, machine shops, garages, and workshops to remove broken screws, bolts, or other threaded parts.

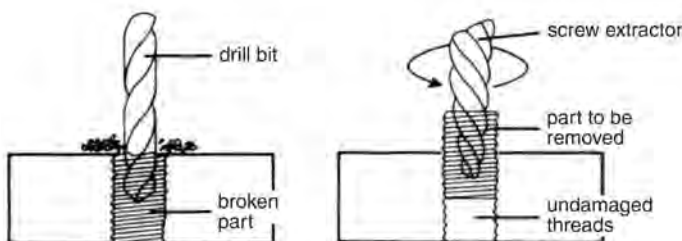**To remove a broken screw, follow this procedure.**

- Drill a hole into the broken screw using the recommended drill size from the table above.
- Insert the proper screw extractor into the hole and start a counter-clockwise (left-hand) rotation using a tap wrench on the square on the shank.
- The extractor will grip the wall of the hole in the screw and back the screw out without damaging the threads.
- A penetrating oil can be helpful in removing rusty or corroded parts.

Mo-Max® HSS**Style: 850****Mo-Max® Cobalt****Style: 855**
Super Mo-Max® Cobalt
Style: 860


tool bit size		overall length inch	order number		
fractional	inch		850 M2 HSS	855 M42 Cobalt	860 M42 Cobalt
1/8	.1250	2.500	C44505	C44536	C44567
3/16	.1875	2.500	C44509	C44540	C44571
1/4	.2500	2.500	C44513	C44544	C44575
5/16	.3125	2.500	C44514	C44545	C44576
3/8	.3750	3.000	C44516	C44547	C44578
7/16	.4375	3.500	C44518	C44549	C44580
1/2	.5000	4.000	C44520	C44551	C44582
5/8	.6250	4.500	C44522	C44553	C44584
3/4	.7500	5.000	C44525	C44556	C44587
7/8	.8750	6.000	C44527	C44558	C44589
1	1.0000	7.000	C44528	C44559	C44590
1-1/4	1.2500	9.000	C44530	C44561	C44592

**GROUND TOOL BITS**

- Mo-Max tool bits are designed for general-purpose work in moderate materials.
- Mo-Max Cobalt tool bits are ideal for general-purpose work in harder materials.
- Super Mo -Max Cobalt tool bits are designed for heavy-duty work in high-temp alloys.
- Super Cle-Max Cobalt tool bits are meant for the heaviest duty work in tough materials.

OTHER TOOLS**Tool Bits Rectangular**Styles: **851, 856, 861****Mo-Max® HSS**Style: **850****Mo-Max® Cobalt**Style: **855****Super Mo-Max® Cobalt**Style: **860**

tool bit size	width	height	overall length	order number		
				851	856	861
fractional	inch	inch	inch	M2 HSS	M42 Cobalt	M42 Cobalt
1/4 x 3/8	.250	.375	2.500	C44600	C44601	C44602
1/4 x 1/2	.250	.500	4.000	C44606	C44607	C44608
1/4 x 1/2	.250	.500	6.000	C44609	C44610	C44611
5/16 x 1/2	.313	.500	3.000	C44616	C44617	C44618
3/8 x 1/2	.375	.500	3.000	C44619	C44620	C44621
3/8 x 1/2	.375	.500	4.000	C44622	C44623	C44624
3/8 x 1/2	.375	.500	6.000	C44625	C44626	C44627
3/8 x 5/8	.375	.625	4.000	C44628	C44629	C44630
3/8 x 5/8	.375	.625	5.000	C44631	C44632	C44633
3/8 x 5/8	.375	.625	6.000	C44634	C44635	C44636
3/8 x 3/4	.375	.750	4.000	C44637	C44638	—
3/8 x 3/4	.375	.750	6.000	C44640	C44641	C44642
1/2 x 3/4	.500	.750	4.000	C44644	C44645	C44646
1/2 x 3/4	.500	.750	6.000	C44647	C44648	C44649
1/2 x 1	.500	1.000	8.000	C44650	C44651	C44652
5/8 x 3/4	.625	.750	5.000	C44653	C44654	C44655
5/8 x 7/8	.625	.875	6.000	C44656	C44657	C44658
3/4 x 1	.750	1.000	6.000	C44659	C44660	C44661

ANSI
SIZES

HSS

Tolerance $+.0002/-0.0000$

blank diameter	width inch	height inch	order number 902
3/64	.0469	1.750	C19271
#51	.0670	2.000	C19288
1/8	.1250	2.750	C19335
5/32	.1562	3.125	C19355
3/16	.1875	3.500	C19377
7/32	.2188	3.750	C19398
1/4,E	.2500	4.000	C19416
5/16	.3125	4.500	C19449

Drill Blank Undersize
Style: 903
ANSI
SIZES

HSS


Tolerance $+.0000/-0.0002$

blank diameter	width inch	height inch	order number 903
#55	.0520	1.875	C19562
1/16	.0625	1.875	C19570
3/32	.0938	2.250	C19599
1/8	.1250	2.750	C19622
3/16	.1875	3.500	C19664
1/4,E	.2500	4.000	C19703
5/16	.3125	4.500	C19736
3/8	.3750	5.000	C19766
1/2	.5000	6.000	C19795




DRILL AND REAMER BLANKS

- Ideal for use as drifts of dowel pins, for gauging purposes, and for making punches.
- Also can be used for round tool bits, countersinks, boring, or burring tools.

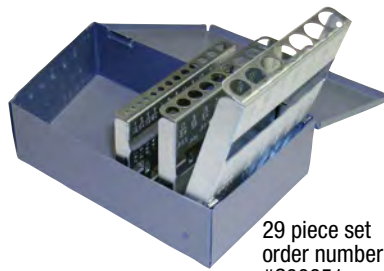OTHER TOOLS**Set - Drill Case
Metal, No Drills**

29 piece set
order number
#C00851



case number	slots number of pieces	holds drill sizes	order number
#4115	115	1/64" to 1/2" x 1/64", A to Z letter, #1 to #60 wire	C00878
#413	13	1/16 to 1/4 x 1/64"	C00854
#415	15	1/16" to 1/2" x 1/32"	C00852
#421	21	1/16" to 3/8" x 1/64"	C00853
#426	26	A to Z letter	C00857
#429	29	1/16" to 1/2" x 1/64"	C00851
#460	60	#1 to #60 wire	C00855
#2001M	25	1.0mm to 13.0 mm x 0.5mm	C00865



Part Number Index

Style Number	Page Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number
Style Index		Style Index		Style Index			Style Index			Style Index			Style Index		
105	95	2565-TN	76-77	C00851	429	142	C01049	2001	35	C02785	2011	60	C02785	2011	60
110C1	93	2575	78	C00852	415	142	C01181	2001	37	C02807	2011	60	C02807	2011	60
110C3	93	2575-TN	78	C00853	421	142	C01192	2001	37	C02811	2011	60	C02811	2011	60
110C6	93	2635	92	C00854	413	142	C01330	2002	40.113	C02818	2011	60	C02818	2011	60
183	111-112	2636	91	C00855	460	142	C01332	2120	21.113	C02833	2011	60	C02833	2011	60
183 Set	112	2645	92	C00857	426	142	C01401	2006	49	C02848	2011	60	C02848	2011	60
192	138	2646	91	C00865	2001M	142	C01415	2006	49	C02861	2011	60	C02861	2011	60
610	95	2727	64	C00878	4115	142	C01430	2006	49	C02867	2011	60	C02867	2011	60
616	104	2745	70	C00901	2075	113	C01443	2006	49	C02872	2011	60	C02872	2011	60
618	104	3001	89	C00902	2075	113	C01453	2006	49	C02877	2011	60	C02877	2011	60
642	105	3722-6	81-82	C00906	192	138	C01462	2006	49	C02881	2012	42	C02881	2012	42
650	105	3722-12	81-82	C00907	192	138	C01473	2006	49	C02883	2012	42	C02883	2012	42
655	110	3780	61-63	C00908	192	138	C01484	2006	49	C02887	2012	42	C02887	2012	42
657	106	3957-6	79-80	C00909	192	138	C01495	2006	49	C02890	2012	42	C02890	2012	42
659	106	3957-12	79-80	C00910	192	138	C01506	2006	49	C02893	2012	42	C02893	2012	42
850	139	4001	97-100	C00917	192	138	C01516	2006	49	C02894	2012	42	C02894	2012	42
851	140	4005	102	C00918	192	138	C01532	2006	49	C02896	2012	42	C02896	2012	42
855	139	4030	101	C00934	2002	40.113	C01538	2006	49	C02898	2012	42	C02898	2012	42
856	140	4703	103	C00937	2002	40.113	C01551	2006	49	C02899	2012	42	C02899	2012	42
860	139	10001	94	C00939	2002	40.113	C01561	2006	49	C02901	2012	42	C02901	2012	42
861	140	10003	94	C00944	998	88.114	C01588	2006	49	C02903	2012	42	C02903	2012	42
879	107			C00960	2001	40.113	C01600	2006	49	C02904	2012	42	C02904	2012	42
879P	109			C00962	2510	73.114	C01799	2002	34	C02906	2012	42	C02906	2012	42
884	108			C00964	4001	114	C01801	2002	34	C02907	2012	42	C02907	2012	42
902	141			C00969	610	95.114	C01803	2002	34	C02909	2012	42	C02909	2012	42
903	141			C00970	10001	94.114	C01805	2002	34	C02910	2012	42	C02910	2012	42
950E	83-84			C00971	10001	94.114	C01808	2002	34	C02912	2012	42	C02912	2012	42
995	90			C00972	10003	94.114	C01811	2002	34	C02914	2012	42	C02914	2012	42
996	88			C00973	10003	94.114	C01812	2002	34	C02915	2012	42	C02915	2012	42
998	88			C00980	2120	21.113	C01814	2002	34	C02917	2012	42	C02917	2012	42
1727	67-69			C00986	2213	59.113	C01816	2002	34	C02918	2012	42	C02918	2012	42
1730	96			C01012	2001	34	C01817	2002	34	C02920	2012	42	C02920	2012	42
1765	32			C01013	2001	34	C01819	2002	34	C02921	2012	42	C02921	2012	42
1766	65-66			C01014	2001	34	C01821	2002	34	C02923	2012	42	C02923	2012	42
1767	33			C01015	2001	34	C01822	2002	34	C02924	2012	42	C02924	2012	42
1798	87			C01016	2001	34	C01824	2002	34	C02927	2012	42	C02927	2012	42
1799	90			C01017	2001	34	C01825	2002	34	C02928	2012	42	C02928	2012	42
2001	34-40			C01018	2001	34	C01827	2002	34	C02932	2012	42	C02932	2012	42
2002	34-40			C01019	2001	34	C01828	2002	34	C02934	2012	42	C02934	2012	42
2002-TC	34-39			C01020	2001	34	C01830	2002	34	C02938	2012	42	C02938	2012	42
2006	49			C01021	2001	34	C01832	2002	34	C02940	2012	42	C02940	2012	42
2011	60			C01022	2001	34	C01833	2002	35	C02942	2012	42	C02942	2012	42
2012	42-43			C01023	2001	34	C01835	2002	35	C02945	2012	42	C02945	2012	42
2020	41			C01024	2001	34	C01836	2002	35	C02947	2012	42	C02947	2012	42
2065	44-45			C01025	2001	34	C02593	2011	60	C02950	2012	42	C02950	2012	42
2065-TN	44-45			C01026	2001	34	C02646	2011	60	C02952	2012	42	C02952	2012	42
2075	46-48			C01027	2001	34	C02652	2011	60	C02954	2012	42	C02954	2012	42
2075-TA	46-48			C01028	2001	34	C02654	2011	60	C02955	2012	42	C02955	2012	42
2075-TC	46-48			C01029	2001	34	C02659	2011	60	C02958	2012	42	C02958	2012	42
2075-TN	46-48			C01030	2001	34	C02666	2011	60	C02959	2012	42	C02959	2012	42
2120	20.21			C01031	2001	34	C02667	2011	60	C02962	2012	42	C02962	2012	42
2133	28-31			C01032	2001	34	C02671	2011	60	C02965	2012	42	C02965	2012	42
2133-TC	28-31			C01033	2001	34	C02681	2011	60	C02968	2012	42	C02968	2012	42
2175	22-24			C01034	2001	34	C02685	2011	60	C02969	2012	42	C02969	2012	42
2175-TA	22-24			C01035	2001	34	C02690	2011	60	C02971	2012	42	C02971	2012	42
2175-TC	22-24			C01036	2001	34	C02694	2011	60	C02973	2012	42	C02973	2012	42
2175-TN	22-24			C01037	2001	34	C02700	2011	60	C02975	2012	42	C02975	2012	42
2213	55-59			C01038	2001	34	C02702	2011	60	C02976	2012	42	C02976	2012	42
2222	52-54			C01039	2001	34	C02704	2011	60	C02978	2012	42	C02978	2012	42
2228	50.51			C01040	2001	34	C02707	2011	60	C02980	2012	42	C02980	2012	42
2330	25-27			C01041	2001	34	C02710	2011	60	C02982	2012	42	C02982	2012	42
2410	85.86			C01042	2001	34	C02713	2011	60	C02983	2012	42	C02983	2012	42
2411	85.86			C01043	2001	34	C02719	2011	60	C02985	2012	42	C02985	2012	42
2412	85.86			C01044	2001	34	C02724	2011	60	C02986	2012	42	C02986	2012	42
2510	71-73			C01045	2001	34	C02735	2011	60	C02988	2012	42	C02988	2012	42
2513	74-75			C01046	2001	35	C02746	2011	60	C02990	2012	42	C02990	2012	42
2565	76-77			C01047	2001	35	C02767	2011	60	C02992	2012	42	C02992	2012	42
				C01048	2001	35	C02776	2011	60	C02995	2012	42	C02995	2012	42

Part Number Index



Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number
C02998	. 2012	42	C03148	. 2012	43	C03781	. 2065-TN	45	C04476	. 2120	20	C04638	. 2120	21
C03000	. 2012	42	C03149	. 2012	43	C03784	. 2065-TN	45	C04478	. 2120	20	C04640	. 2120	21
C03001	. 2012	42	C03150	. 2012	43	C03786	. 2065-TN	45	C04480	. 2120	20	C04641	. 2120	21
C03003	. 2012	42	C03152	. 2012	43	C03801	. 2065-TN	45	C04481	. 2120	20	C04643	. 2120	21
C03005	. 2012	42	C03155	. 2012	43	C03804	. 2065-TN	45	C04482	. 2120	20	C04645	. 2120	21
C03007	. 2012	42	C03158	. 2012	43	C03806	. 2065-TN	45	C04484	. 2120	20	C04647	. 2120	21
C03009	. 2012	42	C03160	. 2012	43	C03807	. 2065-TN	45	C04487	. 2120	20	C04649	. 2120	21
C03011	. 2012	42	C03163	. 2012	43	C04356	. 2120	20	C04489	. 2120	20	C04650	. 2120	21
C03012	. 2012	43	C03165	. 2012	43	C04357	. 2120	20	C04491	. 2120	20	C04652	. 2120	21
C03013	. 2012	43	C03477	. 2020	41	C04359	. 2120	20	C04493	. 2120	20	C04654	. 2120	21
C03015	. 2012	43	C03491	. 2020	41	C04360	. 2120	20	C04496	. 2120	20	C04656	. 2120	21
C03016	. 2012	43	C03506	. 2020	41	C04363	. 2120	20	C04499	. 2120	20	C04658	. 2120	21
C03019	. 2012	43	C03519	. 2020	41	C04364	. 2120	20	C04500	. 2120	20	C04659	. 2120	21
C03022	. 2012	43	C03529	. 2020	41	C04368	. 2120	20	C04502	. 2120	20	C04661	. 2120	21
C03023	. 2012	43	C03538	. 2020	41	C04370	. 2120	20	C04504	. 2120	20	C04663	. 2120	21
C03024	. 2012	43	C03549	. 2020	41	C04374	. 2120	20	C04506	. 2120	20	C04665	. 2120	21
C03026	. 2012	43	C03560	. 2020	41	C04376	. 2120	20	C04509	. 2120	20	C04667	. 2120	21
C03028	. 2012	43	C03571	. 2020	41	C04378	. 2120	20	C04513	. 2120	20	C04668	. 2120	21
C03030	. 2012	43	C03582	. 2020	41	C04381	. 2120	20	C04515	. 2120	20	C04675	. 2120	21
C03031	. 2012	43	C03592	. 2020	41	C04383	. 2120	20	C04517	. 2120	21	C04683	. 2120	21
C03034	. 2012	43	C03601	. 2020	41	C04386	. 2120	20	C04519	. 2120	21	C04690	. 2120	21
C03035	. 2012	43	C03610	. 2020	41	C04388	. 2120	20	C04522	. 2120	21	C04697	. 2120	21
C03037	. 2012	43	C03618	. 2020	41	C04390	. 2120	20	C04524	. 2120	21	C05105	. 2565-TN	76
C03039	. 2012	43	C03632	. 2020	41	C04391	. 2120	20	C04526	. 2120	21	C05111	. 2565-TN	76
C03040	. 2012	43	C03636	. 2020	41	C04394	. 2120	20	C04530	. 2120	21	C05118	. 2565-TN	76
C03042	. 2012	43	C03643	. 2020	41	C04395	. 2120	20	C04531	. 2120	21	C05125	. 2565-TN	76
C03044	. 2012	43	C03651	. 2020	41	C04398	. 2120	20	C04533	. 2120	21	C05131	. 2565-TN	76
C03045	. 2012	43	C03658	. 2020	41	C04401	. 2120	20	C04535	. 2120	21	C05135	. 2565-TN	76
C03046	. 2012	43	C03673	. 2020	41	C04404	. 2120	20	C04537	. 2120	21	C05141	. 2565-TN	76
C03048	. 2012	43	C03681	. 2020	41	C04405	. 2120	20	C04542	. 2120	21	C05147	. 2565-TN	76
C03051	. 2012	43	C03686	. 2020	41	C04407	. 2120	20	C04544	. 2120	21	C05153	. 2565-TN	76
C03053	. 2012	43	C03689	. 2020	41	C04409	. 2120	20	C04547	. 2120	21	C05160	. 2565-TN	76
C03055	. 2012	43	C03692	. 2020	41	C04411	. 2120	20	C04550	. 2120	21	C05165	. 2565-TN	76
C03057	. 2012	43	C03695	. 2020	41	C04412	. 2120	20	C04552	. 2120	21	C05169	. 2565-TN	76
C03060	. 2012	43	C03697	. 2020	41	C04414	. 2120	20	C04555	. 2120	21	C05173	. 2565-TN	76
C03063	. 2012	43	C03702	. 2020	41	C04416	. 2120	20	C04557	. 2120	21	C05176	. 2565-TN	76
C03064	. 2012	43	C03705	. 2065-TN	44	C04418	. 2120	20	C04560	. 2120	21	C05181	. 2565-TN	76
C03066	. 2012	43	C03708	. 2065-TN	44	C04419	. 2120	20	C04563	. 2120	21	C05184	. 2565-TN	76
C03068	. 2012	43	C03711	. 2065-TN	44	C04421	. 2120	20	C04565	. 2120	21	C05185	. 2565-TN	76
C03070	. 2012	43	C03718	. 2065-TN	44	C04422	. 2120	20	C04569	. 2120	21	C05187	. 2565-TN	76
C03073	. 2012	43	C03720	. 2065-TN	44	C04424	. 2120	20	C04572	. 2120	21	C05190	. 2565-TN	76
C03077	. 2012	43	C03722	. 2065-TN	44	C04426	. 2120	20	C04573	. 2120	21	C05193	. 2565-TN	76
C03079	. 2012	43	C03724	. 2065-TN	44	C04428	. 2120	20	C04578	. 2120	21	C05195	. 2565-TN	76
C03081	. 2012	43	C03725	. 2065-TN	44	C04431	. 2120	20	C04580	. 2120	21	C05198	. 2565-TN	76
C03083	. 2012	43	C03728	. 2065-TN	44	C04434	. 2120	20	C04582	. 2120	21	C05201	. 2565-TN	76
C03086	. 2012	43	C03730	. 2065-TN	44	C04436	. 2120	20	C04584	. 2120	21	C05203	. 2565-TN	76
C03088	. 2012	43	C03731	. 2065-TN	44	C04437	. 2120	20	C04585	. 2120	21	C05204	. 2565-TN	76
C03094	. 2012	43	C03732	. 2065-TN	44	C04439	. 2120	20	C04586	. 2120	21	C05205	. 2565-TN	76
C03095	. 2012	43	C03733	. 2065-TN	44	C04441	. 2120	20	C04588	. 2120	21	C05206	. 2565-TN	76
C03097	. 2012	43	C03738	. 2065-TN	44	C04443	. 2120	20	C04591	. 2120	21	C05207	. 2565-TN	76
C03099	. 2012	43	C03741	. 2065-TN	44	C04445	. 2120	20	C04594	. 2120	21	C05208	. 2565-TN	76
C03101	. 2012	43	C03742	. 2065-TN	44	C04447	. 2120	20	C04596	. 2120	21	C08100	. 3722-6	81
C03106	. 2012	43	C03743	. 2065-TN	45	C04448	. 2120	20	C04599	. 2120	21	C08101	. 3722-6	81
C03108	. 2012	43	C03745	. 2065-TN	45	C04449	. 2120	20	C04601	. 2120	21	C08102	. 3722-6	81
C03111	. 2012	43	C03747	. 2065-TN	45	C04451	. 2120	20	C04604	. 2120	21	C08103	. 3722-6	81
C03114	. 2012	43	C03750	. 2065-TN	45	C04452	. 2120	20	C04606	. 2120	21	C08104	. 3722-6	81
C03116	. 2012	43	C03751	. 2065-TN	45	C04455	. 2120	20	C04609	. 2120	21	C08105	. 3722-6	81
C03119	. 2012	43	C03752	. 2065-TN	45	C04458	. 2120	20	C04612	. 2120	21	C08106	. 3722-6	81
C03121	. 2012	43	C03753	. 2065-TN	45	C04459	. 2120	20	C04614	. 2120	21	C08107	. 3722-6	81
C03124	. 2012	43	C03756	. 2065-TN	45	C04460	. 2120	20	C04617	. 2120	21	C08108	. 3722-6	81
C03127	. 2012	43	C03758	. 2065-TN	45	C04462	. 2120	20	C04619	. 2120	21	C08109	. 3722-6	81
C03129	. 2012	43	C03760	. 2065-TN	45	C04464	. 2120	20	C04622	. 2120	21	C08110	. 3722-6	81
C03133	. 2012	43	C03761	. 2065-TN	45	C04466	. 2120	20	C04625	. 2120	21	C08111	. 3722-6	81
C03136	. 2012	43	C03762	. 2065-TN	45	C04467	. 2120	20	C04627	. 2120	21	C08112	. 3722-6	81
C03137	. 2012	43	C03764	. 2065-TN	45	C04470	. 2120	20	C04630	. 2120	21	C08113	. 3722-6	81
C03142	. 2012	43	C03765	. 2065-TN	45	C04471	. 2120	20	C04632	. 2120	21	C08114	. 3722-6	81
C03144	. 2012	43	C03773	. 2065-TN	45	C04473	. 2120	20	C04634	. 2120	21	C08115	. 3722-6	81
C03146	. 2012	43	C03776	. 2065-TN	45	C04475	. 2120	20	C04636	. 2120	21	C08117	. 3722-6	82



Part Number Index

Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number
C08119	. 3722-6	82	C08618	. 2510	71	C08766	. 2510	72	C09670	. 950E	83	C11385	. 2075-TA	48
C08121	. 3722-6	82	C08620	. 2510	71	C08770	. 2510	72	C09671	. 950E	83	C11386	. 2075-TA	48
C08123	. 3722-6	82	C08623	. 2510	71	C08772	. 2510	72	C09672	. 950E	84	C11387	. 2075-TA	48
C08130	. 3722-6	82	C08625	. 2510	71	C08777	. 2510	72	C09673	. 950E	84	C11400	. 2075-TA	46
C08132	. 3722-6	82	C08627	. 2510	71	C08779	. 2510	72	C09674	. 950E	84	C11401	. 2075-TA	47
C08133	. 3722-6	82	C08628	. 2510	71	C08782	. 2510	72	C09675	. 950E	84	C11402	. 2075-TA	47
C08134	. 3722-6	82	C08631	. 2510	71	C08785	. 2510	72	C09676	. 950E	84	C11403	. 2075-TA	47
C08135	. 3722-6	82	C08632	. 2510	71	C08787	. 2510	72	C09677	. 950E	84	C11404	. 2075-TA	47
C08137	. 3722-6	82	C08635	. 2510	71	C08790	. 2510	72	C09678	. 950E	84	C11405	. 2075-TA	47
C08138	. 3722-6	82	C08638	. 2510	71	C08792	. 2510	72	C09679	. 950E	84	C11408	. 2075-TA	47
C08140	. 3722-6	81	C08641	. 2510	71	C08800	. 2510	72	C09680	. 950E	84	C11409	. 2075-TA	47
C08142	. 3722-6	81	C08642	. 2510	71	C08807	. 2510	72	C09681	. 950E	84	C11410	. 2075-TA	47
C08144	. 3722-6	81	C08644	. 2510	71	C08808	. 2510	73	C09707	. 950E	83	C11411	. 2075-TA	47
C08145	. 3722-6	81	C08646	. 2510	71	C08815	. 2510	73	C09709	. 950E	83	C11412	. 2075-TA	47
C08146	. 3722-6	81	C08648	. 2510	71	C08821	. 2510	73	C09711	. 950E	83	C11413	. 2075-TA	47
C08147	. 3722-6	81	C08649	. 2510	71	C08824	. 2510	73	C09713	. 950E	83	C11414	. 2075-TA	47
C08148	. 3722-6	81	C08651	. 2510	71	C08827	. 2510	73	C09714	. 950E	83	C11415	. 2075-TA	47
C08149	. 3722-6	82	C08653	. 2510	71	C08830	. 2510	73	C09715	. 950E	83	C11416	. 2075-TA	47
C08150	. 3722-6	82	C08655	. 2510	71	C08832	. 2510	73	C09717	. 950E	83	C11417	. 2075-TA	47
C08151	. 3722-6	82	C08656	. 2510	71	C08835	. 2510	73	C09719	. 950E	83	C11418	. 2075-TA	47
C08152	. 3722-6	82	C08658	. 2510	71	C08837	. 2510	73	C09721	. 950E	83	C11419	. 2075-TA	47
C08153	. 3722-6	82	C08659	. 2510	71	C08840	. 2510	73	C09723	. 950E	84	C11420	. 2075-TA	47
C08154	. 3722-6	82	C08661	. 2510	71	C08842	. 2510	73	C09725	. 950E	84	C11422	. 2075-TA	47
C08155	. 3722-6	82	C08663	. 2510	71	C08845	. 2510	73	C09727	. 950E	84	C11423	. 2075-TA	47
C08156	. 3722-6	82	C08665	. 2510	72	C08848	. 2510	73	C09729	. 950E	84	C11424	. 2075-TA	47
C08157	. 3722-6	82	C08668	. 2510	72	C08850	. 2510	73	C09731	. 950E	84	C11425	. 2075-TA	46
C08158	. 3722-6	82	C08671	. 2510	72	C08853	. 2510	73	C09733	. 950E	84	C11426	. 2075-TA	46
C08159	. 3722-6	82	C08673	. 2510	72	C08855	. 2510	73	C09735	. 950E	84	C11427	. 2075-TA	46
C08160	. 3722-6	82	C08674	. 2510	72	C08858	. 2510	73	C09736	. 950E	83	C11428	. 2075-TA	46
C08161	. 3722-6	82	C08676	. 2510	72	C08861	. 2510	73	C09738	. 950E	83	C11431	. 2075-TA	46
C08162	. 3722-6	82	C08678	. 2510	72	C08863	. 2510	73	C09740	. 950E	83	C11432	. 2075-TA	46
C08163	. 3722-6	82	C08680	. 2510	72	C08866	. 2510	73	C09742	. 950E	83	C11433	. 2075-TA	46
C08164	. 3722-6	82	C08682	. 2510	72	C08868	. 2510	73	C09744	. 950E	83	C11434	. 2075-TA	46
C08165	. 3722-6	82	C08684	. 2510	72	C08870	. 2510	73	C09746	. 950E	83	C11435	. 2075-TA	46
C08166	. 3722-6	82	C08685	. 2510	72	C08872	. 2510	73	C09748	. 950E	83	C11437	. 2075-TA	46
C08167	. 3722-12	81	C08686	. 2510	72	C08874	. 2510	73	C09750	. 950E	84	C11438	. 2075-TA	46
C08168	. 3722-12	81	C08688	. 2510	72	C08876	. 2510	73	C09752	. 950E	84	C11442	. 2075-TA	46
C08169	. 3722-12	81	C08689	. 2510	72	C08877	. 2510	73	C09754	. 950E	84	C11444	. 2075-TA	46
C08170	. 3722-12	81	C08692	. 2510	72	C08879	. 2510	73	C09756	. 950E	84	C11445	. 2075-TA	46
C08171	. 3722-12	81	C08695	. 2510	72	C08881	. 2510	73	C09758	. 950E	84	C11446	. 2075-TA	46
C08172	. 3722-12	81	C08696	. 2510	72	C08883	. 2510	73	C09760	. 950E	84	C11447	. 2075-TA	46
C08173	. 3722-12	81	C08697	. 2510	72	C08885	. 2510	73	C09762	. 950E	84	C11448	. 2075-TA	46
C08174	. 3722-12	82	C08699	. 2510	72	C08886	. 2510	73	C09764	. 950E	84	C11449	. 2075-TA	46
C08175	. 3722-12	82	C08701	. 2510	72	C08888	. 2510	73	C09766	. 950E	84	C11450	. 2075-TA	46
C08176	. 3722-12	82	C08703	. 2510	72	C08890	. 2510	73	C09768	. 950E	84	C11451	. 2075-TA	46
C08177	. 3722-12	82	C08704	. 2510	72	C08892	. 2510	73	C09770	. 950E	84	C11452	. 2075-TA	46
C08178	. 3722-12	82	C08707	. 2510	72	C08894	. 2510	73	C09772	. 950E	84	C11600	. 2222	52
C08179	. 3722-12	82	C08708	. 2510	72	C08895	. 2510	73	C09774	. 950E	84	C11601	. 2222	52
C08180	. 3722-12	82	C08710	. 2510	72	C08897	. 2510	73	C09776	. 950E	84	C11602	. 2222	52
C08181	. 3722-12	82	C08712	. 2510	72	C08899	. 2510	73	C11360	. 2075-TA	46	C11603	. 2222	52
C08182	. 3722-12	82	C08713	. 2510	72	C08901	. 2510	73	C11361	. 2075-TA	46	C11604	. 2222	52
C08183	. 3722-12	82	C08715	. 2510	72	C08903	. 2510	73	C11362	. 2075-TA	46	C11605	. 2222	52
C08184	. 3722-12	82	C08717	. 2510	72	C08904	. 2510	73	C11363	. 2075-TA	46	C11606	. 2222	52
C08185	. 3722-12	82	C08718	. 2510	72	C09655	. 950E	83	C11365	. 2075-TA	46	C11607	. 2222	52
C08186	. 3722-12	82	C08719	. 2510	72	C09656	. 950E	83	C11366	. 2075-TA	46	C11608	. 2222	53
C08187	. 3722-12	82	C08721	. 2510	72	C09657	. 950E	83	C11367	. 2075-TA	46	C11609	. 2222	53
C08188	. 3722-12	81	C08724	. 2510	72	C09658	. 950E	83	C11368	. 2075-TA	46	C11610	. 2222	53
C08593	. 2510	71	C08726	. 2510	72	C09659	. 950E	83	C11370	. 2075-TA	47	C11611	. 2222	53
C08594	. 2510	71	C08728	. 2510	72	C09660	. 950E	83	C11371	. 2075-TA	47	C11612	. 2222	53
C08596	. 2510	71	C08730	. 2510	72	C09661	. 950E	83	C11373	. 2075-TA	47	C11613	. 2222	53
C08597	. 2510	71	C08733	. 2510	72	C09662	. 950E	83	C11374	. 2075-TA	47	C11614	. 2222	53
C08600	. 2510	71	C08737	. 2510	72	C09663	. 950E	83	C11375	. 2075-TA	47	C11615	. 2222	53
C08601	. 2510	71	C08743	. 2510	72	C09664	. 950E	83	C11377	. 2075-TA	47	C11616	. 2222	54
C08605	. 2510	71	C08746	. 2510	72	C09665	. 950E	83	C11378	. 2075-TA	47	C11617	. 2222	54
C08607	. 2510	71	C08750	. 2510	72	C09666	. 950E	83	C11379	. 2075-TA	47	C11618	. 2222	54
C08611	. 2510	71	C08752	. 2510	72	C09667	. 950E	83	C11381	. 2075-TA	48	C11619	. 2222	54
C08613	. 2510	71	C08757	. 2510	72	C09668	. 950E	83	C11383	. 2075-TA	48	C11620	. 2222	54
C08615	. 2510	71	C08759	. 2510	72	C09669	. 950E	83	C11384	. 2075-TA	48	C11621	. 2222	54

Part Number Index



Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number
C11622	. 2222	 54	C11690	. 2222	 52	C12173	. 2410	 85	C13006	. 2565	 77	C13099	. 2075-TC	 46
C11623	. 2222	 54	C11691	. 2222	 52	C12176	. 2410	 85	C13008	. 2565	 77	C13100	. 3957-6	 79
C11624	. 2222	 54	C11692	. 2222	 52	C12178	. 2410	 85	C13019	. 2565-TN	 76	C13101	. 3957-6	 79
C11625	. 2222	 54	C11693	. 2222	 52	C12181	. 2410	 85	C13020	. 2565-TN	 76	C13102	. 3957-6	 79
C11626	. 2222	 54	C11694	. 2222	 52	C12183	. 2410	 85	C13022	. 2565-TN	 77	C13103	. 3957-6	 79
C11627	. 2222	 54	C11695	. 2222	 52	C12186	. 2410	 85	C13023	. 2565-TN	 77	C13104	. 3957-6	 79
C11628	. 2222	 54	C11696	. 2222	 52	C12188	. 2410	 85	C13024	. 2565-TN	 77	C13105	. 3957-6	 79
C11629	. 2222	 54	C11697	. 2222	 52	C12191	. 2410	 85	C13026	. 2565-TN	 77	C13106	. 3957-6	 80
C11630	. 2222	 53	C11698	. 2222	 52	C12194	. 2410	 85	C13028	. 2565-TN	 77	C13107	. 3957-6	 80
C11631	. 2222	 53	C11699	. 2222	 52	C12196	. 2410	 85	C13029	. 2075-TN	 46	C13108	. 3957-6	 80
C11632	. 2222	 53	C11700	. 2222	 52	C12199	. 2410	 85	C13030	. 2075-TN	 46	C13109	. 3957-6	 80
C11633	. 2222	 53	C11701	. 2222	 52	C12201	. 2410	 85	C13031	. 2075-TN	 46	C13110	. 3957-6	 80
C11634	. 2222	 53	C11702	. 2222	 52	C12204	. 2410	 85	C13033	. 2075-TN	 47	C13111	. 3957-6	 80
C11635	. 2222	 53	C11703	. 2222	 52	C12207	. 2410	 86	C13035	. 2075-TN	 48	C13112	. 3957-6	 80
C11636	. 2222	 53	C11704	. 2222	 52	C12209	. 2410	 86	C13036	. 2075-TN	 48	C13113	. 3957-6	 80
C11637	. 2222	 53	C11705	. 2222	 52	C12212	. 2410	 86	C13037	. 2075-TN	 48	C13114	. 3957-6	 80
C11638	. 2222	 53	C11706	. 2222	 52	C12214	. 2410	 86	C13038	. 2075-TN	 48	C13115	. 3957-6	 80
C11639	. 2222	 53	C11739	. 995	 90	C12216	. 2410	 86	C13040	. 2075-TN	 48	C13116	. 3957-6	 80
C11640	. 2222	 53	C11757	. 995	 90	C12218	. 2410	 86	C13042	. 2075-TC	 46	C13117	. 3957-6	 80
C11641	. 2222	 53	C11771	. 995	 90	C12220	. 2410	 86	C13043	. 2075-TC	 47	C13118	. 3957-6	 80
C11642	. 2222	 54	C11782	. 995	 90	C12222	. 2410	 86	C13044	. 2075-TC	 48	C13119	. 3957-6	 80
C11643	. 2222	 54	C11796	. 995	 90	C12223	. 2410	 86	C13045	. 2075-TC	 48	C13120	. 3957-6	 80
C11644	. 2222	 54	C11800	. 2222	 52	C12225	. 2410	 86	C13047	. 2075-TC	 48	C13121	. 3957-6	 80
C11645	. 2222	 54	C11805	. 2222	 52	C12227	. 2410	 86	C13048	. 2075-TC	 48	C13122	. 3957-6	 80
C11646	. 2222	 54	C11810	. 2222	 52	C12229	. 2410	 86	C13049	. 2075-TC	 48	C13123	. 3957-6	 80
C11647	. 2222	 54	C11815	. 2222	 52	C12231	. 2410	 86	C13051	. 2075-TC	 48	C13124	. 3957-6	 80
C11648	. 2222	 54	C11820	. 2222	 52	C12232	. 2410	 86	C13052	. 2075-TC	 48	C13125	. 3957-6	 80
C11649	. 2222	 54	C11822	. 2222	 52	C12234	. 2410	 86	C13054	. 2075-TC	 48	C13126	. 3957-6	 80
C11650	. 2222	 54	C11825	. 2222	 52	C12236	. 2410	 86	C13055	. 2075-TC	 48	C13127	. 3957-6	 80
C11651	. 2222	 54	C11830	. 2222	 53	C12238	. 2410	 86	C13056	. 2075-TC	 47	C13128	. 3957-6	 80
C11652	. 2222	 54	C11831	. 2222	 53	C12240	. 2410	 86	C13057	. 2075-TC	 47	C13129	. 3957-6	 80
C11653	. 2222	 54	C11835	. 2222	 53	C12241	. 2410	 86	C13058	. 2075-TC	 47	C13130	. 3957-6	 80
C11654	. 2222	 54	C11839	. 2222	 53	C12243	. 2410	 86	C13059	. 2075-TC	 47	C13131	. 3957-6	 80
C11655	. 2222	 53	C11840	. 2222	 53	C12247	. 2410	 86	C13060	. 2075-TC	 47	C13132	. 3957-6	 80
C11656	. 2222	 53	C11845	. 2222	 53	C12249	. 2410	 86	C13061	. 2075-TC	 47	C13133	. 3957-6	 80
C11657	. 2222	 53	C11850	. 2222	 53	C12250	. 2410	 86	C13062	. 2075-TC	 47	C13134	. 3957-6	 80
C11658	. 2222	 53	C11855	. 2222	 53	C12252	. 2410	 86	C13063	. 2075-TC	 47	C13135	. 3957-6	 80
C11659	. 2222	 53	C11860	. 2222	 53	C12254	. 2410	 86	C13065	. 2075-TC	 47	C13136	. 3957-6	 80
C11660	. 2222	 53	C11865	. 2222	 54	C12257	. 2410	 86	C13066	. 2075-TC	 47	C13137	. 3957-6	 80
C11661	. 2222	 53	C11870	. 2222	 54	C12265	. 2410	 86	C13067	. 2075-TC	 47	C13138	. 3957-6	 80
C11662	. 2222	 53	C11875	. 2222	 54	C12272	. 2410	 86	C13069	. 2075-TC	 47	C13139	. 3957-6	 80
C11663	. 2222	 53	C11880	. 2222	 54	C12279	. 2410	 86	C13070	. 2075-TC	 47	C13140	. 3957-6	 80
C11664	. 2222	 53	C11885	. 2222	 54	C12286	. 2410	 86	C13071	. 2075-TC	 47	C13141	. 3957-6	 80
C11665	. 2222	 53	C11890	. 2222	 54	C12290	. 2410	 86	C13072	. 2075-TC	 47	C13142	. 3957-6	 80
C11666	. 2222	 53	C11895	. 2222	 54	C12293	. 2410	 86	C13073	. 2075-TC	 47	C13143	. 3957-6	 80
C11667	. 2222	 53	C11900	. 2222	 54	C12301	. 2410	 86	C13074	. 2075-TC	 47	C13144	. 3957-6	 80
C11668	. 2222	 53	C11905	. 2222	 54	C12304	. 2410	 86	C13075	. 2075-TC	 47	C13145	. 3957-6	 80
C11669	. 2222	 53	C11910	. 2222	 54	C12308	. 2410	 86	C13076	. 2075-TC	 47	C13146	. 3957-6	 80
C11670	. 2222	 53	C11915	. 2222	 54	C12315	. 2410	 86	C13078	. 2075-TC	 47	C13147	. 3957-6	 80
C11671	. 2222	 53	C11920	. 2222	 54	C12322	. 2410	 86	C13079	. 2075-TC	 46	C13148	. 3957-6	 80
C11672	. 2222	 53	C12040	. 2410	 85	C12336	. 2410	 86	C13080	. 2075-TC	 46	C13149	. 3957-6	 80
C11673	. 2222	 53	C12052	. 2410	 85	C12351	. 2410	 86	C13081	. 2075-TC	 46	C13150	. 3957-6	 79
C11674	. 2222	 53	C12064	. 2410	 85	C12365	. 2410	 86	C13082	. 2075-TC	 46	C13151	. 3957-6	 79
C11675	. 2222	 53	C12069	. 2410	 85	C12483*	. 2411	 85	C13083	. 2075-TC	 46	C13152	. 3957-6	 79
C11676	. 2222	 53	C12075	. 2410	 85	C12505	. 2411	 86	C13084	. 2075-TC	 46	C13153	. 3957-6	 79
C11677	. 2222	 52	C12082	. 2410	 85	C12518	. 2411	 86	C13085	. 2075-TC	 46	C13154	. 3957-6	 79
C11678	. 2222	 52	C12091	. 2410	 85	C12532	. 2411	 86	C13086	. 2075-TC	 46	C13155	. 3957-6	 79
C11679	. 2222	 52	C12099	. 2410	 85	C12541	. 2411	 86	C13087	. 2075-TC	 46	C13156	. 3957-6	 79
C11680	. 2222	 52	C12113	. 2410	 85	C12566	. 2411	 86	C13088	. 2075-TC	 46	C13157	. 3957-6	 79
C11681	. 2222	 52	C12117	. 2410	 85	C12670	. 2412	 86	C13089	. 2075-TC	 46	C13158	. 3957-6	 79
C11682	. 2222	 52	C12124	. 2410	 85	C12678	. 2412	 86	C13090	. 2075-TC	 46	C13159	. 3957-6	 79
C11683	. 2222	 52	C12132	. 2410	 85	C12684	. 2412	 86	C13091	. 2075-TC	 46	C13160	. 3957-6	 79
C11684	. 2222	 52	C12139	. 2410	 85	C12691	. 2412	 86	C13093	. 2075-TC	 46	C13161	. 3957-6	 79
C11685	. 2222	 52	C12147	. 2410	 85	C13000	. 2565	 76	C13094	. 2075-TC	 46	C13162	. 3957-6	 79
C11686	. 2222	 52	C12154	. 2410	 85	C13001	. 2565	 76	C13095	. 2075-TC	 46	C13163	. 3957-6	 79
C11687	. 2222	 52	C12162	. 2410	 85	C13002	. 2565	 77	C13096	. 2075-TC	 46	C13164	. 3957-6	 79
C11688	. 2222	 52	C12167	. 2410	 85	C13004	. 2565	 77	C13097	. 2075-TC	 46	C13165	. 3957-6	 79
C11689	. 2222	 52	C12170	. 2410	 85	C13005	. 2565	 77	C13098	. 2075-TC	 46	C13166	. 3957-6	 79



Part Number Index

Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number
C13167	3957-6	79	C13235	3957-12	80	C14254	2175	23	C14349	2175-TN	24	C14499	3780	63.113
C13168	3957-6	79	C13236	3957-12	80	C14255	2175	23	C14350	2175-TN	24	C14501	2133	28
C13169	3957-6	79	C13237	3957-12	80	C14256	2175	23	C14351	2175-TN	24	C14502	2133	28
C13170	3957-6	79	C13238	3957-12	80	C14257	2175	22	C14352	2175-TN	24	C14504	2133	28
C13171	3957-6	79	C13239	3957-12	79	C14258	2175	22	C14353	2175-TN	24	C14505	2133	28
C13172	3957-6	79	C13240	3957-12	79	C14259	2175	22	C14354	2175-TN	24	C14508	2133	28
C13173	3957-6	79	C13241	3957-12	79	C14260	2175	22	C14355	2175-TN	24	C14509	2133	28
C13174	3957-6	79	C13242	3957-12	79	C14261	2175	22	C14356	2175-TN	24	C14513	2133	28
C13175	2075-TG	46	C13243	3957-12	79	C14262	2175	22	C14357	2175-TN	24	C14515	2133	28
C13176	3957-12	79	C13244	3957-12	79	C14263	2175	22	C14358	2175-TN	24	C14519	2133	28
C13177	3957-12	79	C13245	3957-6	80	C14264	2175	22	C14359	2175-TN	24	C14521	2133	28
C13178	3957-12	79	C13246	3957-6	80	C14265	2175	22	C14360	2175-TN	24	C14523	2133	28
C13179	3957-12	79	C13250	2075-TA	48	C14266	2175	22	C14361	2175-TN	24	C14526	2133	28
C13180	3957-12	79	C13251	2075-TA	48	C14267	2175	22	C14362	2175-TN	23	C14528	2133	28
C13181	3957-12	80	C14200	2175	22	C14268	2175	22	C14363	2175-TN	23	C14531	2133	28
C13182	3957-12	80	C14201	2175	22	C14269	2175	22	C14364	2175-TN	23	C14533	2133	28
C13183	3957-12	80	C14202	2175	22	C14270	2175	22	C14365	2175-TN	23	C14535	2133	28
C13184	3957-12	80	C14203	2175	22	C14271	2175	22	C14366	2175-TN	23	C14536	2133	28
C13185	3957-12	80	C14204	2175	22	C14272	2175	22	C14367	2175-TN	23	C14539	2133	28
C13186	3957-12	80	C14205	2175	22	C14273	2175	22	C14368	2175-TN	23	C14540	2133	28
C13187	3957-12	80	C14206	2175	22	C14274	2175	22	C14369	2175-TN	23	C14543	2133	28
C13188	3957-12	80	C14207	2175	22	C14275	2175	22	C14370	2175-TN	23	C14546	2133	28
C13189	3957-12	80	C14208	2175	23	C14276	2175	22	C14371	2175-TN	23	C14549	2133	28
C13190	3957-12	80	C14209	2175	23	C14277	2175	22	C14372	2175-TN	23	C14550	2133	28
C13191	3957-12	80	C14210	2175	23	C14278	2175	22	C14373	2175-TN	23	C14552	2133	28
C13192	3957-12	80	C14211	2175	23	C14279	2175	22	C14374	2175-TN	23	C14554	2133	28
C13193	3957-12	80	C14212	2175	23	C14280	2175	22	C14375	2175-TN	23	C14556	2133	29
C13194	3957-12	80	C14213	2175	23	C14284	2175	23	C14376	2175-TN	23	C14557	2133	29
C13195	3957-12	80	C14214	2175	23	C14286	2175	23	C14377	2175-TN	23	C14559	2133	29
C13196	3957-12	80	C14215	2175	23	C14287	2175	23	C14378	2175-TN	22	C14561	2133	29
C13197	3957-12	80	C14216	2175	23	C14288	2175	23	C14379	2175-TN	22	C14562	2133	29
C13198	3957-12	80	C14217	2175	23	C14291	2175	23	C14380	2175-TN	22	C14563	2133	29
C13199	3957-12	80	C14218	2175	23	C14292	2175	23	C14381	2175-TN	22	C14565	2133	29
C13200	3957-12	80	C14219	2175	23	C14296	2175	23	C14382	2175-TN	22	C14566	2133	29
C13201	3957-12	80	C14220	2175	23	C14297	2175	23	C14383	2175-TN	22	C14568	2133	29
C13202	3957-12	80	C14221	2175	24	C14298	2175	23	C14384	2175-TN	22	C14570	2133	29
C13203	3957-12	80	C14222	2175	24	C14299	2175	23	C14385	2175-TN	22	C14572	2133	29
C13204	3957-12	80	C14223	2175	24	C14301	2175	23	C14386	2175-TN	22	C14574	2133	29
C13205	2075-TA	48	C14224	2175	24	C14302	2175	23	C14387	2175-TN	22	C14577	2133	29
C13206	2075-TA	48	C14225	2175	24	C14306	2175	24	C14388	2175-TN	22	C14579	2133	29
C13207	2075-TA	48	C14226	2175	24	C14321	2175-TN	22	C14389	2175-TN	22	C14580	2133	29
C13208	2075-TA	48	C14227	2175	24	C14322	2175-TN	22	C14390	2175-TN	22	C14582	2133	29
C13209	2075-TA	48	C14228	2175	24	C14323	2175-TN	22	C14391	2175-TN	22	C14584	2133	29
C13210	2075-TA	48	C14229	2175	24	C14324	2175-TN	22	C14392	2175-TN	22	C14585	2133	29
C13211	3957-12	80	C14230	2175	24	C14325	2175-TN	22	C14393	2175-TN	22	C14587	2133	29
C13212	2075-TA	48	C14231	2175	24	C14326	2175-TN	22	C14395	2175-TN	22	C14589	2133	29
C13213	2075-TA	48	C14232	2175	24	C14327	2175-TN	22	C14396	2175-TN	22	C14590	2133	29
C13214	2075-TA	48	C14233	2175	24	C14328	2175-TN	22	C14397	2175-TN	22	C14591	2133	29
C13215	2075-TA	48	C14234	2175	24	C14329	2175-TN	23	C14398	2175-TN	22	C14593	2133	29
C13216	2075-TA	48	C14235	2175	24	C14330	2175-TN	23	C14399	2175-TN	22	C14594	2133	29
C13217	2075-TA	48	C14236	2175	24	C14331	2175-TN	23	C14400	2175-TN	22	C14597	2133	29
C13218	3957-12	80	C14237	2175	24	C14332	2175-TN	23	C14401	2175-TN	22	C14599	2133	29
C13219	3957-12	80	C14238	2175	24	C14333	2175-TN	23	C14402	2175-TN	22	C14600	2133	29
C13220	3957-12	80	C14239	2175	24	C14334	2175-TN	23	C14413	2175-TN	23	C14601	2133	29
C13221	3957-12	80	C14240	2175	24	C14335	2175-TN	23	C14418	2175-TN	23	C14603	2133	29
C13222	3957-12	80	C14241	2175	23	C14336	2175-TN	23	C14419	2175-TN	23	C14605	2133	29
C13223	3957-12	80	C14242	2175	23	C14337	2175-TN	23	C14420	2175-TN	23	C14607	2133	29
C13224	3957-12	80	C14243	2175	23	C14338	2175-TN	23	C14421	2175-TN	23	C14608	2133	29
C13225	3957-12	80	C14244	2175	23	C14339	2175-TN	23	C14422	2175-TN	23	C14610	2133	29
C13226	3957-12	80	C14245	2175	23	C14340	2175-TN	23	C14424	2175-TN	24	C14611	2133	29
C13227	3957-12	80	C14246	2175	23	C14341	2175-TN	23	C14425	2175-TN	24	C14613	2133	30
C13228	3957-12	80	C14247	2175	23	C14342	2175-TN	24	C14429	2175-TN	22	C14615	2133	30
C13229	3957-12	80	C14248	2175	23	C14343	2175-TN	24	C14430	2175-TN	22	C14616	2133	30
C13230	3957-12	80	C14249	2175	23	C14344	2175-TN	24	C14431	2175-TN	22	C14618	2133	30
C13231	3957-12	80	C14250	2175	23	C14345	2175-TN	24	C14432	2175-TN	22	C14620	2133	30
C13232	3957-12	80	C14251	2175	23	C14346	2175-TN	24	C14434	2175-TN	22	C14621	2133	30
C13233	3957-12	80	C14252	2175	23	C14347	2175-TN	24	C14435	2175-TN	22	C14622	2133	30
C13234	3957-12	80	C14253	2175	23	C14348	2175-TN	24	C14439	2175-TN	22	C14624	2133	30

CLEVELAND | **WALTER**



Part Number Index

Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number
C15328	. 2175-TC	22	C15898	. 3780	61	C15966	. 3780	62	C16068	. 2565	76	C16217	. 2065	44
C15329	. 2175-TC	22	C15899	. 3780	61	C15967	. 3780	62	C16069	. 2565	76	C16218	. 2065	44
C15330	. 2175-TC	22	C15900	. 3780	61	C15968	. 3780	62	C16070	. 2565	76	C16219	. 2065	44
C15334	. 2175-TC	23	C15901	. 3780	61	C15969	. 3780	62	C16071	. 2565	76	C16228	. 2565	76
C15335	. 2175-TC	23	C15902	. 3780	61	C15970	. 3780	62	C16072	. 2565	76	C16239	. 2565	76
C15336	. 2175-TC	23	C15903	. 3780	61	C15971	. 3780	62	C16073	. 2565	76	C16240	. 2565	76
C15337	. 2175-TC	23	C15904	. 3780	61	C15972	. 3780	63	C16074	. 2565	76	C16244	. 2565	76
C15340	. 2175-TC	23	C15905	. 3780	61	C15973	. 3780	63	C16075	. 2565	76	C16245	. 2565	76
C15341	. 2175-TC	23	C15906	. 3780	61	C15974	. 3780	63	C16076	. 2565	76	C16248	. 2565	76
C15345	. 2175-TC	23	C15907	. 3780	61	C15975	. 3780	63	C16077	. 2565	76	C16249	. 2565	76
C15346	. 2175-TC	23	C15908	. 3780	61	C15976	. 3780	63	C16078	. 2565	76	C16430	. 2075-TC	47
C15347	. 2175-TC	23	C15909	. 3780	61	C15977	. 3780	63	C16079	. 2565	76	C16431	. 2075-TC	47
C15348	. 2175-TC	23	C15910	. 3780	61	C15978	. 3780	63	C16080	. 2565	76	C16432	. 2075-TC	47
C15350	. 2175-TC	23	C15911	. 3780	61	C15979	. 3780	63	C16081	. 2565	76	C16433	. 2075-TC	47
C15351	. 2175-TC	23	C15912	. 3780	61	C15980	. 3780	63	C16082	. 2565	76	C16434	. 2075-TC	47
C15355	. 2175-TC	24	C15913	. 3780	61	C15981	. 3780	63	C16083	. 2565	76	C16435	. 2075-TC	47
C15541	. 2075	46	C15914	. 3780	61	C15982	. 3780	63	C16084	. 2565	76	C16436	. 2075-TC	47
C15556	. 2075	46	C15915	. 3780	62	C15983	. 3780	63	C16085	. 2565	76	C16437	. 2075-TC	47
C15559	. 2075	46	C15916	. 3780	62	C15984	. 3780	63	C16086	. 2565	76	C16438	. 2075-TC	47
C15563	. 2075	47	C15917	. 3780	62	C15985	. 3780	63	C16168	. 2065	45	C16439	. 2075-TC	47
C15573	. 2075	48	C15918	. 3780	62	C15986	. 3780	63	C16169	. 2065	45	C16440	. 2075-TC	48
C15574	. 2075	48	C15919	. 3780	62	C15987	. 3780	63	C16170	. 2065	45	C16441	. 2075-TC	48
C15575	. 2075	48	C15920	. 3780	62	C15988	. 3780	63	C16171	. 2065	45	C16442	. 2075-TC	48
C15577	. 2075	48	C15921	. 3780	62	C15989	. 3780	63	C16172	. 2065	45	C16443	. 2075-TC	48
C15583	. 2075	48	C15922	. 3780	62	C15990	. 3780	63	C16173	. 2065	45	C16444	. 2075-TC	48
C15650	. 2075	47	C15923	. 3780	62	C15991	. 3780	63	C16174	. 2065	45	C16445	. 2075-TC	48
C15651	. 2075	47	C15924	. 3780	62	C15992	. 3780	63	C16175	. 2065	45	C16446	. 2075-TC	48
C15652	. 2075	47	C15925	. 3780	62	C15993	. 3780	63	C16176	. 2065	45	C16447	. 2075-TC	48
C15653	. 2075	47	C15926	. 3780	62	C15994	. 3780	63	C16177	. 2065	45	C16448	. 2075-TC	48
C15654	. 2075	47	C15927	. 3780	62	C16029	. 2065	44	C16178	. 2065	45	C16449	. 2075-TC	48
C15655	. 2075	47	C15928	. 3780	62	C16030	. 2065	44	C16179	. 2065	45	C16450	. 2075-TC	48
C15656	. 2075	47	C15929	. 3780	62	C16031	. 2065	44	C16180	. 2065	45	C16451	. 2075-TC	48
C15657	. 2075	47	C15930	. 3780	62	C16032	. 2065	44	C16181	. 2065	45	C16452	. 2075-TC	48
C15658	. 2075	47	C15931	. 3780	62	C16033	. 2065	44	C16182	. 2065	45	C16453	. 2075-TC	48
C15659	. 2075	47	C15932	. 3780	62	C16034	. 2065	44	C16183	. 2065	45	C16454	. 2075-TC	48
C15660	. 2075	48	C15933	. 3780	62	C16035	. 2065	44	C16184	. 2065	45	C16503	. 2075	47
C15661	. 2075	48	C15934	. 3780	62	C16036	. 2065	45	C16185	. 2065	45	C16504	. 2075	47
C15662	. 2075	48	C15935	. 3780	62	C16037	. 2065	45	C16186	. 2065	45	C16505	. 2075	47
C15663	. 2075	48	C15936	. 3780	62	C16038	. 2065	45	C16187	. 2065	45	C16506	. 2075	47
C15664	. 2075	48	C15937	. 3780	62	C16039	. 2065	45	C16188	. 2065	45	C16507	. 2075	47
C15665	. 2075	48	C15938	. 3780	62	C16040	. 2065	45	C16189	. 2065	44	C16508	. 2075	47
C15666	. 2075	48	C15939	. 3780	62	C16041	. 2065	45	C16190	. 2065	44	C16509	. 2075	47
C15667	. 2075	48	C15940	. 3780	62	C16042	. 2065	45	C16191	. 2065	44	C16510	. 2075	47
C15668	. 2075	48	C15941	. 3780	62	C16043	. 2065	45	C16192	. 2065	44	C16511	. 2075	47
C15669	. 2075	48	C15942	. 3780	62	C16044	. 2065	45	C16193	. 2065	44	C16512	. 2075	47
C15670	. 2075	48	C15943	. 3780	62	C16045	. 2065	45	C16194	. 2065	44	C16513	. 2075	47
C15671	. 2075	48	C15944	. 3780	62	C16046	. 2065	45	C16195	. 2065	44	C16514	. 2075	47
C15672	. 2075	48	C15945	. 3780	62	C16047	. 2065	45	C16196	. 2065	44	C16515	. 2075	47
C15673	. 2075	48	C15946	. 3780	62	C16048	. 2065	45	C16197	. 2065	44	C16516	. 2075	47
C15674	. 2075	48	C15947	. 3780	62	C16049	. 2065	45	C16198	. 2065	44	C16517	. 2075	47
C15880	. 3780	61	C15948	. 3780	62	C16050	. 2065	45	C16199	. 2065	44	C16518	. 2075	47
C15881	. 3780	61	C15949	. 3780	62	C16051	. 2065	45	C16200	. 2065	44	C16519	. 2075	47
C15882	. 3780	61	C15950	. 3780	62	C16052	. 2065	45	C16201	. 2065	44	C16520	. 2075	47
C15883	. 3780	61	C15951	. 3780	62	C16053	. 2065	45	C16202	. 2065	44	C16521	. 2075	47
C15884	. 3780	61	C15952	. 3780	62	C16054	. 2065	45	C16203	. 2065	44	C16522	. 2075	47
C15885	. 3780	61	C15953	. 3780	62	C16055	. 2065	45	C16204	. 2065	44	C16523	. 2075	47
C15886	. 3780	61	C15954	. 3780	62	C16056	. 2065	45	C16205	. 2065	44	C16524	. 2075	47
C15887	. 3780	61	C15955	. 3780	62	C16057	. 2065	45	C16206	. 2065	44	C16525	. 2075	47
C15888	. 3780	61	C15956	. 3780	62	C16058	. 2565	76	C16207	. 2065	44	C16526	. 2075	47
C15889	. 3780	61	C15957	. 3780	62	C16059	. 2565	76	C16208	. 2065	44	C16527	. 2075	46
C15890	. 3780	61	C15958	. 3780	62	C16060	. 2565	76	C16209	. 2065	44	C16528	. 2075	46
C15891	. 3780	61	C15959	. 3780	62	C16061	. 2565	76	C16210	. 2065	44	C16529	. 2075	46
C15892	. 3780	61	C15960	. 3780	62	C16062	. 2565	76	C16211	. 2065	44	C16530	. 2075	46
C15893	. 3780	61	C15961	. 3780	62	C16063	. 2565	76	C16212	. 2065	44	C16531	. 2075	46
C15894	. 3780	61	C15962	. 3780	62	C16064	. 2565	76	C16213	. 2065	44	C16532	. 2075	46
C15895	. 3780	61	C15963	. 3780	62	C16065	. 2565	76	C16214	. 2065	44	C16533	. 2075	46
C15896	. 3780	61	C15964	. 3780	62	C16066	. 2565	76	C16215	. 2065	44	C16534	. 2075	46
C15897	. 3780	61	C15965	. 3780	62	C16067	. 2565	76	C16216	. 2065	44	C16535	. 2075	46

Part Number Index



Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number
C16536	. 2075	46	C16613	. 2075-TN	47	C16684	. 2075-TN	48	C16889	. 2575-TN	78	C16982	. 2075-TA	46
C16537	. 2075	46	C16614	. 2075-TN	47	C16685	. 2075-TN	48	C16890	. 2575-TN	78	C16983	. 2075-TA	46
C16538	. 2075	46	C16615	. 2075-TN	47	C16686	. 2075-TN	48	C16891	. 2575-TN	78	C16984	. 2075-TA	47
C16539	. 2075	46	C16616	. 2075-TN	47	C16687	. 2075-TN	48	C16892	. 2575-TN	78	C16985	. 2075-TA	47
C16540	. 2075	46	C16617	. 2075-TN	47	C16688	. 2075-TN	48	C16893	. 2575-TN	78	C16986	. 2075-TA	47
C16541	. 2075	46	C16618	. 2075-TN	47	C16689	. 2075-TN	48	C16894	. 2575-TN	78	C16987	. 2075-TA	47
C16542	. 2075	46	C16619	. 2075-TN	47	C16690	. 2075-TN	48	C16895	. 2575-TN	78	C16988	. 2075-TA	47
C16543	. 2075	46	C16620	. 2075-TN	47	C16691	. 2075-TN	48	C16896	. 2575-TN	78	C16989	. 2075-TA	47
C16544	. 2075	46	C16621	. 2075-TN	47	C16692	. 2075-TN	48	C16897	. 2575-TN	78	C16990	. 2075-TA	47
C16545	. 2075	46	C16622	. 2075-TN	47	C16693	. 2075-TN	48	C16898	. 2575-TN	78	C16991	. 2075-TA	47
C16546	. 2075	46	C16623	. 2075-TN	47	C16694	. 2075-TN	48	C16899	. 2575-TN	78	C16992	. 2075-TA	47
C16547	. 2075	46	C16624	. 2075-TN	47	C16695	. 2075-TN	48	C16900	. 2575-TN	78	C16993	. 2075-TA	47
C16548	. 2075	46	C16625	. 2075-TN	47	C16696	. 2075-TN	46	C16901	. 2575-TN	78	C16994	. 2075-TA	47
C16549	. 2075	46	C16626	. 2075-TN	47	C16697	. 2075-TN	46	C16902	. 2575-TN	78	C16995	. 2075-TA	47
C16550	. 2075	46	C16628	. 2075-TN	47	C16698	. 2075-TN	46	C16903	. 2575-TN	78	C16996	. 2075-TA	47
C16551	. 2075	46	C16629	. 2075-TN	47	C16699	. 2075-TN	46	C16904	. 2575-TN	78	C16997	. 2075-TA	48
C16552	. 2075	46	C16630	. 2075-TN	47	C16700	. 2075-TN	46	C16905	. 2575-TN	78	C16998	. 2075-TA	48
C16553	. 2075	46	C16631	. 2075-TN	47	C16701	. 2075-TN	47	C16906	. 2575-TN	78	C16999	. 2075-TA	48
C16554	. 2075	46	C16632	. 2075-TN	47	C16702	. 2075-TN	47	C16907	. 2575-TN	78	C17000	. 2075-TA	48
C16555	. 2075	46	C16633	. 2075-TN	47	C16703	. 2075-TN	47	C16908	. 2575-TN	78	C17001	. 2075-TA	48
C16556	. 2075	46	C16634	. 2075-TN	47	C16705	. 2075-TN	47	C16909	. 2575-TN	78	C19271	. 902	141
C16557	. 2075	46	C16635	. 2075-TN	47	C16707	. 2075-TN	47	C16910	. 2575-TN	78	C19288	. 902	141
C16558	. 2075	46	C16636	. 2075-TN	47	C16708	. 2075-TN	47	C16911	. 2575-TN	78	C19335	. 902	141
C16559	. 2075	46	C16637	. 2075-TN	46	C16709	. 2075-TN	47	C16912	. 2575-TN	78	C19355	. 902	141
C16560	. 2075	46	C16638	. 2075-TN	46	C16710	. 2075-TN	47	C16913	. 2575-TN	78	C19377	. 902	141
C16561	. 2075	47	C16639	. 2075-TN	46	C16712	. 2075-TN	48	C16914	. 2575-TN	78	C19398	. 902	141
C16562	. 2075	47	C16640	. 2075-TN	46	C16716	. 2075-TN	48	C16921	. 2575-TN	78	C19416	. 902	141
C16563	. 2075	47	C16641	. 2075-TN	46	C16718	. 2075-TN	48	C16925	. 2575-TN	78	C19449	. 902	141
C16564	. 2075	47	C16642	. 2075-TN	46	C16720	. 2075-TN	48	C16942	. 2075-TC	46	C19562	. 903	141
C16565	. 2075	47	C16643	. 2075-TN	46	C16722	. 2075-TN	48	C16943	. 2075-TC	46	C19570	. 903	141
C16566	. 2075	47	C16644	. 2075-TN	46	C16723	. 2075-TN	48	C16944	. 2075-TC	46	C19599	. 903	141
C16567	. 2075	47	C16645	. 2075-TN	46	C16776	. 2575	78	C16945	. 2075-TC	46	C19622	. 903	141
C16568	. 2075	47	C16646	. 2075-TN	46	C16777	. 2575	78	C16946	. 2075-TC	46	C19664	. 903	141
C16569	. 2075	47	C16647	. 2075-TN	46	C16778	. 2575	78	C16947	. 2075-TC	46	C19703	. 903	141
C16570	. 2075	48	C16648	. 2075-TN	46	C16779	. 2575	78	C16948	. 2075-TC	46	C19736	. 903	141
C16571	. 2075	48	C16649	. 2075-TN	46	C16780	. 2575	78	C16949	. 2075-TC	46	C19766	. 903	141
C16572	. 2075	48	C16650	. 2075-TN	46	C16781	. 2575	78	C16950	. 2075-TC	46	C19795	. 903	141
C16573	. 2075	48	C16651	. 2075-TN	46	C16782	. 2575	78	C16951	. 2075-TC	46	C23812	. 616	104
C16574	. 2075	48	C16652	. 2075-TN	46	C16783	. 2575	78	C16952	. 2075-TC	46	C23813	. 616	104
C16575	. 2075	48	C16654	. 2075-TN	46	C16784	. 2575	78	C16953	. 2075-TC	46	C23814	. 616	104
C16576	. 2075	48	C16655	. 2075-TN	46	C16785	. 2575	78	C16954	. 2075-TC	47	C23815	. 616	104
C16577	. 2075	48	C16656	. 2075-TN	46	C16786	. 2575	78	C16955	. 2075-TC	47	C23816	. 616	104
C16578	. 2075	48	C16657	. 2075-TN	46	C16787	. 2575	78	C16956	. 2075-TC	47	C23817	. 616	104
C16579	. 2075	48	C16658	. 2075-TN	46	C16788	. 2575	78	C16957	. 2075-TC	47	C23818	. 616	104
C16580	. 2075	48	C16659	. 2075-TN	46	C16789	. 2575	78	C16958	. 2075-TC	47	C23819	. 616	104
C16581	. 2075	48	C16660	. 2075-TN	46	C16790	. 2575	78	C16959	. 2075-TC	47	C23820	. 616	104
C16582	. 2075	48	C16661	. 2075-TN	46	C16791	. 2575	78	C16960	. 2075-TC	47	C23821	. 616	104
C16583	. 2075	48	C16663	. 2075-TN	46	C16792	. 2575	78	C16961	. 2075-TC	47	C23822	. 616	104
C16584	. 2075	46	C16664	. 2075-TN	46	C16793	. 2575	78	C16962	. 2075-TC	47	C23823	. 616	104
C16585	. 2075	46	C16665	. 2075-TN	46	C16794	. 2575	78	C16963	. 2075-TC	47	C23824	. 616	104
C16586	. 2075	46	C16666	. 2075-TN	46	C16795	. 2575	78	C16964	. 2075-TC	47	C23957	. 618	104
C16587	. 2075	46	C16667	. 2075-TN	46	C16796	. 2575	78	C16965	. 2075-TC	47	C23958	. 618	104
C16588	. 2075	46	C16668	. 2075-TN	46	C16797	. 2575	78	C16966	. 2075-TC	47	C23959	. 618	104
C16589	. 2075	47	C16669	. 2075-TN	46	C16798	. 2575	78	C16967	. 2075-TC	48	C23960	. 618	104
C16590	. 2075	47	C16670	. 2075-TN	46	C16799	. 2575	78	C16968	. 2075-TC	48	C23961	. 618	104
C16591	. 2075	47	C16671	. 2075-TN	46	C16800	. 2575	78	C16969	. 2075-TC	48	C23962	. 618	104
C16593	. 2075	47	C16672	. 2075-TN	46	C16801	. 2575	78	C16970	. 2075-TC	48	C24167	. 2635	92
C16595	. 2075	47	C16673	. 2075-TN	47	C16802	. 2575	78	C16971	. 2075-TC	48	C24168	. 2635	92
C16596	. 2075	47	C16674	. 2075-TN	47	C16803	. 2575	78	C16972	. 2075-TA	46	C24169	. 2635	92
C16597	. 2075	47	C16675	. 2075-TN	47	C16804	. 2575	78	C16973	. 2075-TA	46	C24170	. 2635	92
C16598	. 2075	47	C16676	. 2075-TN	47	C16805	. 2575	78	C16974	. 2075-TA	46	C24171	. 2635	92
C16600	. 2075	48	C16677	. 2075-TN	47	C16810	. 2575	78	C16975	. 2075-TA	46	C24172	. 2635	92
C16604	. 2075	48	C16678	. 2075-TN	47	C16812	. 2575	78	C16976	. 2075-TA	46	C24173	. 2635	92
C16606	. 2075	48	C16679	. 2075-TN	47	C16816	. 2575	78	C16977	. 2075-TA	46	C24174	. 2635	92
C16608	. 2075	48	C16680	. 2075-TN	47	C16885	. 2575-TN	78	C16978	. 2075-TA	46	C24175	. 2635	92
C16610	. 2075	48	C16681	. 2075-TN	47	C16886	. 2575-TN	78	C16979	. 2075-TA	46	C24176	. 2635	92
C16611	. 2075	48	C16682	. 2075-TN	48	C16887	. 2575-TN	78	C16980	. 2075-TA	46	C24177	. 2635	92
C16612	. 2075-TN	47	C16683	. 2075-TN	48	C16888	. 2575-TN	78	C16981	. 2075-TA	46	C24178	. 2635	92



Part Number Index

Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number
C24179	. 2635	 92	C24295	. 655	 110	C25322	. 4001	 98	C25804	. 4001	 99	C26811	. 4001	 100
C24180	. 2635	 92 .114	C24982	. 642	 105	C25327	. 4001	 98	C25806	. 4001	 99	C26876	. 4001	 100
C24181	. 2645	 92	C24983	. 642	 105	C25330	. 4001	 98	C25807	. 4001	 99	C26941	. 4001	 100
C24182	. 2645	 92	C24984	. 642	 105	C25339	. 4001	 98	C25809	. 4001	 99	C27006	. 4001	 100
C24183	. 2645	 92	C24985	. 642	 105	C25346	. 4001	 98	C25811	. 4001	 99	C27072	. 4001	 100
C24184	. 2645	 92	C24986	. 642	 105	C25351	. 4001	 98	C25833	. 4001	 99	C27137	. 4001	 100
C24185	. 2645	 92	C24987	. 642	 105	C25357	. 4001	 98	C25844	. 4001	 99	C27144	. 4001	 100
C24186	. 2645	 92	C24988	. 642	 105	C25360	. 4001	 98	C25845	. 4001	 99	C27152	. 4001	 100
C24187	. 2645	 92 .114	C24989	. 642	 105	C25362	. 4001	 98	C25858	. 4001	 99	C27159	. 4001	 100
C24188	. 2645	 92	C25003	. 4001	 97	C25365	. 4001	 98	C25873	. 4001	 99	C27166	. 4001	 100
C24189	. 2645	 92	C25005	. 4001	 97	C25366	. 4001	 98	C25878	. 4001	 99	C27180	. 4001	 100
C24190	. 2645	 92	C25008	. 4001	 97	C25368	. 4001	 98	C25892	. 4001	 99	C27195	. 4001	 100
C24191	. 2645	 92	C25010	. 4001	 97	C25369	. 4001	 98	C25911	. 4001	 99	C29273	. 4030	 101
C24192	. 2645	 92	C25019	. 4001	 97	C25374	. 4001	 98	C25912	. 4001	 99	C29311	. 4030	 101
C24193	. 2645	 92	C25020	. 4001	 97	C25380	. 4001	 98	C25942	. 4001	 99	C29350	. 4030	 101
C24194	. 2645	 92 .114	C25034	. 4001	 97	C25385	. 4001	 98	C25944	. 4001	 99	C29386	. 4030	 101
C24229	. 650	 105	C25041	. 4001	 97	C25392	. 4001	 98	C25946	. 4001	 99	C29421	. 4030	 101
C24230	. 650	 105	C25053	. 4001	 97	C25397	. 4001	 98	C25947	. 4001	 99	C29457	. 4030	 101
C24231	. 650	 105	C25059	. 4001	 97	C25402	. 4001	 98	C25949	. 4001	 99	C29493	. 4030	 101
C24232	. 650	 105	C25060	. 4001	 97	C25404	. 4001	 98	C25981	. 4001	 99	C29565	. 4030	 101
C24233	. 650	 105	C25063	. 4001	 97	C25408	. 4001	 98	C26014	. 4001	 100	C29601	. 4030	 101
C24234	. 650	 105	C25072	. 4001	 97	C25417	. 4001	 98	C26015	. 4001	 100	C29637	. 4030	 101
C24235	. 650	 105	C25079	. 4001	 97	C25426	. 4001	 98	C26048	. 4001	 100	C29709	. 4030	 101
C24236	. 650	 105	C25087	. 4001	 97	C25438	. 4001	 98	C26080	. 4001	 100	C29745	. 4030	 101
C24237	. 650	 105	C25094	. 4001	 97	C25443	. 4001	 98	C26083	. 4001	 100	C29803	. 4030	 101
C24238	. 650	 105	C25095	. 4001	 97	C25459	. 4001	 98	C26085	. 4001	 100	C29853	. 4030	 101
C24239	. 650	 105	C25100	. 4001	 97	C25473	. 4001	 98	C26086	. 4001	 100	C29890	. 4030	 101
C24240	. 650	 105	C25101	. 4001	 97	C25474	. 4001	 98	C26150	. 4001	 100	C29925	. 4030	 101
C24241	. 650	 105	C25108	. 4001	 97	C25475	. 4001	 98	C26151	. 4001	 100	C29960	. 4030	 101
C24242	. 650	 105	C25110	. 4001	 97	C25483	. 4001	 98	C26167	. 2636	 91	C29997	. 4030	 101
C24243	. 650	 105	C25120	. 4001	 97	C25492	. 4001	 98	C26168	. 2636	 91	C30033	. 4030	 101
C24244	. 650	 105	C25128	. 4001	 97	C25501	. 4001	 98	C26169	. 2636	 91	C30067	. 4030	 101
C24245	. 650	 105	C25139	. 4001	 97	C25508	. 4001	 98	C26170	. 2636	 91	C30134	. 4030	 101
C24250	. 657	 106	C25140	. 4001	 97	C25510	. 4001	 98	C26171	. 2636	 91	C30168	. 4030	 101
C24251	. 657	 106	C25146	. 4001	 97	C25512	. 4001	 98	C26172	. 2636	 91	C30201	. 4030	 101
C24252	. 657	 106	C25151	. 4001	 97	C25513	. 4001	 98	C26173	. 2636	 114	C30235	. 4030	 101
C24253	. 657	 106	C25155	. 4001	 97	C25516	. 4001	 98	C26174	. 2636	 91	C30268	. 4030	 101
C24254	. 657	 106	C25159	. 4001	 97	C25530	. 4001	 99	C26175	. 2636	 91	C30335	. 4030	 101
C24255	. 657	 106	C25165	. 4001	 97	C25539	. 4001	 99	C26176	. 2636	 91	C30402	. 4030	 101
C24256	. 657	 106	C25171	. 4001	 97	C25550	. 4001	 99	C26177	. 2636	 91	C30469	. 4030	 101
C24257	. 657	 106	C25178	. 4001	 97	C25552	. 4001	 99	C26178	. 2636	 91	C30536	. 4030	 101
C24258	. 657	 106	C25180	. 4001	 97	C25566	. 4001	 99	C26179	. 2636	 91	C30603	. 4030	 101
C24259	. 657	 106	C25183	. 4001	 97	C25567	. 4001	 99	C26180	. 2636	 114	C30670	. 4030	 101
C24260	. 657	 106	C25185	. 4001	 97	C25577	. 4001	 99	C26181	. 2646	 91	C30735	. 4030	 101
C24261	. 657	 106	C25187	. 4001	 97	C25585	. 4001	 99	C26182	. 2646	 91	C30800	. 4030	 101
C24262	. 657	 106	C25194	. 4001	 97	C25605	. 4001	 99	C26183	. 2646	 91	C30865	. 4030	 101
C24263	. 657	 106	C25203	. 4001	 97	C25608	. 4001	 99	C26184	. 2646	 91	C30931	. 4030	 101
C24264	. 657	 106	C25210	. 4001	 98	C25617	. 4001	 99	C26185	. 2646	 91	C31061	. 4030	 101
C24265	. 657	 106	C25212	. 4001	 98	C25622	. 4001	 99	C26186	. 2646	 91	C31191	. 4030	 101
C24271	. 659	 106	C25215	. 4001	 98	C25634	. 4001	 99	C26187	. 2646	 91 .114	C31322	. 4030	 101
C24272	. 659	 106	C25216	. 4001	 98	C25655	. 4001	 99	C26188	. 2646	 91	C31337	. 4030	 101
C24273	. 659	 106	C25220	. 4001	 98	C25658	. 4001	 99	C26189	. 2646	 91	C31351	. 4030	 101
C24274	. 659	 106	C25226	. 4001	 98	C25660	. 4001	 99	C26190	. 2646	 91	C31365	. 4030	 101
C24275	. 659	 106	C25243	. 4001	 98	C25661	. 4001	 99	C26191	. 2646	 91	C31380	. 4030	 101
C24276	. 659	 106	C25253	. 4001	 98	C25663	. 4001	 99	C26192	. 2646	 91	C33842	. 4005	 102
C24277	. 659	 106	C25254	. 4001	 98	C25668	. 4001	 99	C26193	. 2646	 91	C33986	. 4005	 102
C24278	. 659	 106	C25262	. 4001	 98	C25669	. 4001	 99	C26194	. 2646	 91 .114	C34129	. 4005	 102
C24279	. 659	 106	C25269	. 4001	 98	C25685	. 4001	 99	C26217	. 4001	 100	C34266	. 4005	 102
C24280	. 659	 106	C25275	. 4001	 98	C25698	. 4001	 99	C26218	. 4001	 100	C34400	. 4005	 102
C24281	. 659	 106	C25281	. 4001	 98	C25707	. 4001	 99	C26284	. 4001	 100	C34467	. 4005	 102
C24282	. 659	 106	C25285	. 4001	 98	C25723	. 4001	 99	C26351	. 4001	 100	C34534	. 4005	 102
C24283	. 659	 106	C25290	. 4001	 98	C25733	. 4001	 99	C26352	. 4001	 100	C34601	. 4005	 102
C24284	. 659	 106	C25291	. 4001	 98	C25742	. 4001	 99	C26418	. 4001	 100	C34668	. 4005	 102
C24285	. 659	 106	C25292	. 4001	 98	C25743	. 4001	 99	C26485	. 4001	 100	C34735	. 4005	 102
C24286	. 659	 106	C25297	. 4001	 98	C25764	. 4001	 99	C26550	. 4001	 100	C34802	. 4005	 102
C24292	. 655	 110	C25301	. 4001	 98	C25768	. 4001	 99	C26615	. 4001	 100	C34867	. 4005	 102
C24293	. 655	 110	C25313	. 4001	 98	C25789	. 4001	 99	C26680	. 4001	 100	C34932	. 4005	 102
C24294	. 655	 110	C25314	. 4001	 98	C25801	. 4001	 99	C26746	. 4001	 100	C34997	. 4005	 102

Part Number Index



Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number
C35063	4005	102	C44623	856	140	C46137	10001	94	C46265	998	88	C46372	110C6	93
C35128	4005	102	C44624	861	140	C46138	10001	94	C46266	998	88	C46373	110C6	93
C35193	4005	102	C44625	851	140	C46139	10001	94	C46267	998	88	C46374	110C6	93
C35258	4005	102	C44626	856	140	C46140	10001	94	C46268	998	88	C46375	110C6	93
C35323	4005	102	C44627	861	140	C46141	10001	94	C46269	998	88	C46376	110C6	93
C35389	4005	102	C44628	851	140	C46142	10001	94	C46270	998	88	C46377	110C6	93
C35454	4005	102	C44629	856	140	C46143	10001	94	C46272	996	88	C46378	110C6	93
C35461	4005	102	C44630	861	140	C46150	10003	94	C46273	996	88	C46379	110C6	93
C35469	4005	102	C44631	851	140	C46151	10003	94	C46274	996	88	C46380	110C6	93
C35476	4005	102	C44632	856	140	C46152	10003	94	C46275	996	88	C46381	110C6	93
C35483	4005	102	C44633	861	140	C46153	10003	94	C46276	996	88	C46382	110C6	93
C35490	4005	102	C44634	851	140	C46155	10003	94	C46277	996	88	C46383	110C6	93
C35497	4005	102	C44635	856	140	C46156	10003	94	C46278	996	88	C46384	110C6	93
C35505	4005	102	C44636	861	140	C46157	10003	94	C46279	996	88	C46385	110C6	93
C35512	4005	102	C44637	851	140	C46158	10003	94	C46314	879P	109	C46386	110C6	93
C41872	2133	31	C44638	856	140	C46159	10003	94	C46316	879P	109	C46387	110C6	93
C44505	850	139	C44640	851	140	C46161	10003	94	C46320	110C1	93	C46388	110C6	93
C44509	850	139	C44641	856	140	C46162	10003	94	C46321	110C1	93	C46389	110C6	93
C44513	850	139	C44642	861	140	C46163	10003	94	C46322	110C1	93	C46390	110C6	93
C44514	850	139	C44644	851	140	C46164	10003	94	C46323	110C1	93	C46391	110C6	93
C44516	850	139	C44645	856	140	C46165	10003	94	C46324	110C1	93	C46400	1799	90
C44518	850	139	C44646	861	140	C46167	10003	94	C46325	110C1	93	C46401	1799	90
C44520	850	139	C44647	851	140	C46168	10003	94	C46326	110C1	93	C46402	1799	90
C44522	850	139	C44648	856	140	C46169	10003	94	C46327	110C1	93	C46403	1799	90
C44525	850	139	C44649	861	140	C46170	10003	94	C46328	110C1	93	C46404	1799	90
C44527	850	139	C44650	851	140	C46171	10003	94	C46329	110C1	93	C46405	1799	90
C44528	850	139	C44651	856	140	C46173	10003	94	C46330	110C1	93	C46406	1799	90
C44530	850	139	C44652	861	140	C46174	10003	94	C46331	110C1	93	C46407	1799	90
C44536	855	139	C44653	851	140	C46175	10003	94	C46332	110C1	93	C46408	1799	90
C44540	855	139	C44654	856	140	C46176	10003	94	C46333	110C1	93	C46409	1799	90
C44544	855	139	C44655	861	140	C46177	10003	94	C46334	110C1	93	C46410	1799	90
C44545	855	139	C44656	851	140	C46179	10003	94	C46335	110C1	93	C46411	1799	90
C44547	855	139	C44657	856	140	C46180	10003	94	C46336	110C1	93	C46412	1799	90
C44549	855	139	C44658	861	140	C46181	10003	94	C46337	110C1	93	C46413	1799	90
C44551	855	139	C44659	851	140	C46182	10003	94	C46338	110C1	93	C46414	1799	90
C44553	855	139	C44660	856	140	C46183	10003	94	C46339	110C1	93	C46415	1799	90
C44556	855	139	C44661	861	140	C46185	10003	94	C46340	110C1	93	C46416	1799	90
C44558	855	139	C46101	10001	94	C46186	10003	94	C46341	110C1	93	C46417	1799	90
C44559	855	139	C46102	10001	94	C46187	10003	94	C46342	110C1	93	C46421	879	107
C44561	855	139	C46103	10001	94	C46188	10003	94	C46343	110C1	93	C46422	879	107
C44567	860	139	C46104	10001	94	C46189	10003	94	C46344	110C3	93	C46423	879	107
C44571	860	139	C46106	10001	94	C46190	10003	94	C46345	110C3	93	C46424	879	107
C44575	860	139	C46107	10001	94	C46191	10003	94	C46346	110C3	93	C46425	879	107
C44576	860	139	C46108	10001	94	C46192	10003	94	C46347	110C3	93	C46426	879	107
C44578	860	139	C46109	10001	94	C46198	610	95	C46348	110C3	93	C46427	879	107
C44580	860	139	C46110	10001	94	C46199	610	95	C46349	110C3	93	C46428	879	107
C44582	860	139	C46112	10001	94	C46200	610	95	C46350	110C3	93	C46429	879	107
C44584	860	139	C46113	10001	94	C46201	610	95	C46351	110C3	93	C46430	879	107
C44587	860	139	C46114	10001	94	C46204	610	95	C46352	110C3	93	C46431	879	107
C44589	860	139	C46115	10001	94	C46205	610	95	C46353	110C3	93	C46432	879	107
C44590	860	139	C46116	10001	94	C46206	610	95	C46354	110C3	93	C46433	879	107
C44592	860	139	C46118	10001	94	C46207	610	95	C46355	110C3	93	C46434	879	107
C44600	851	140	C46119	10001	94	C46210	610	95	C46356	110C3	93	C46435	879	107
C44601	856	140	C46120	10001	94	C46211	610	95	C46357	110C3	93	C46436	879	107
C44602	861	140	C46121	10001	94	C46212	610	95	C46358	110C3	93	C46437	879	107
C44606	851	140	C46122	10001	94	C46213	610	95	C46359	110C3	93	C46438	879	107
C44607	856	140	C46123	10001	94	C46216	610	95	C46360	110C3	93	C46439	879	107
C44608	861	140	C46124	10001	94	C46217	610	95	C46361	110C3	93	C46440	879	107
C44609	851	140	C46125	10001	94	C46218	610	95	C46362	110C3	93	C46441	879	107
C44610	856	140	C46126	10001	94	C46219	610	95	C46363	110C3	93	C46443	879	107
C44611	861	140	C46127	10001	94	C46222	610	95	C46364	110C3	93	C46445	879	107
C44616	851	140	C46129	10001	94	C46223	610	95	C46365	110C3	93	C46447	879	107
C44617	856	140	C46130	10001	94	C46224	610	95	C46366	110C3	93	C46448	879	107
C44618	861	140	C46131	10001	94	C46225	610	95	C46367	110C3	93	C46449	879	107
C44619	851	140	C46132	10001	94	C46261	998	88	C46368	110C6	93	C46520	879P	109
C44620	856	140	C46133	10001	94	C46262	998	88	C46369	110C6	93	C46522	879P	109
C44621	861	140	C46135	10001	94	C46263	998	88	C46370	110C6	93	C46523	879P	109
C44622	851	140	C46136	10001	94	C46264	998	88	C46371	110C6	93	C46525	879P	109



Part Number Index

Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number
C46527	. 879P	109	C46716	. 879P	109	C48758	. 2727	64	C53667	. 105	95	C70063	. 2213	56
C46528	. 879P	109	C46723	. 879P	109	C48769	. 2727	64	C53668	. 105	95	C70064	. 2213	56
C46529	. 879P	109	C46886	. 884	108	C48784	. 2727	64	C53669	. 192	138	C70065	. 2213	56
C46531	. 879P	109	C46888	. 884	108	C48799	. 2727	64	C53670	. 192	138	C70067	. 2213	56
C46533	. 879P	109	C46890	. 884	108	C48812	. 2727	64	C53671	. 192	138	C70068	. 2213	56
C46537	. 879P	109	C46891	. 884	108	C48818	. 2727	64	C70000	. 2213	55	C70070	. 2213	56
C46538	. 879P	109	C46892	. 884	108	C48823	. 2727	64	C70001	. 2213	55	C70071	. 2213	56
C46539	. 879P	109	C46893	. 884	108	C48828	. 2727	64	C70002	. 2213	55	C70072	. 2213	56
C46540	. 879P	109	C46894	. 884	108	C49017	. 2745	70	C70003	. 2213	56	C70073	. 2213	56
C46544	. 879P	109	C46896	. 884	108	C49029	. 2745	70	C70004	. 2213	56	C70074	. 2213	56
C46545	. 879P	109	C46898	. 884	108	C49041	. 2745	70	C70005	. 2213	56	C70076	. 2213	56
C46546	. 879P	109	C46900	. 884	108	C49052	. 2745	70	C70006	. 2213	56	C70077	. 2213	56
C46547	. 879P	109	C46902	. 884	108	C49064	. 2745	70	C70007	. 2213	56	C70078	. 2213	56
C46548	. 879P	109	C46904	. 884	108	C49078	. 2745	70	C70008	. 2213	57	C70079	. 2213	56
C46549	. 879P	109	C46906	. 884	108	C49087	. 2745	70	C70009	. 2213	57	C70080	. 2213	56
C46550	. 879P	109	C46908	. 884	108	C49098	. 2745	70	C70010	. 2213	57	C70081	. 2213	56
C46551	. 879P	109	C46910	. 884	108	C49110	. 2745	70	C70011	. 2213	57	C70082	. 2213	56
C46553	. 879P	109	C47239	. 1727	68	C49119	. 2745	70	C70012	. 2213	57	C70083	. 2213	57
C46554	. 879P	109	C47240	. 1727	68	C49121	. 2745	70	C70013	. 2213	58	C70085	. 2213	57
C46555	. 879P	109	C47241	. 1727	68	C49124	. 2745	70	C70014	. 2213	58	C70086	. 2213	57
C46556	. 879P	109	C47242	. 1727	68	C49129	. 2745	70	C70015	. 2213	58	C70087	. 2213	57
C46557	. 879P	109	C47243	. 1727	68	C49134	. 2745	70	C70016	. 2213	58	C70088	. 2213	57
C46558	. 879P	109	C47244	. 1727	68	C49139	. 2745	70	C70017	. 2213	58	C70089	. 2213	57
C46560	. 879P	109	C47245	. 1727	68	C49145	. 2745	70	C70018	. 2213	58	C70090	. 2213	57
C46565	. 879P	109	C47246	. 1727	68	C49155	. 2745	70	C70019	. 2213	58	C70091	. 2213	57
C46566	. 879P	109	C47247	. 1727	68	C50103	. 1730	96	C70020	. 2213	58	C70092	. 2213	57
C46569	. 879P	109	C47248	. 1727	68	C50121	. 1730	96	C70021	. 2213	58	C70094	. 2213	57
C46570	. 879P	109	C47249	. 1727	68	C50133	. 1730	96	C70022	. 2213	58	C70095	. 2213	57
C46571	. 879P	109	C47250	. 1727	69	C50145	. 1730	96	C70023	. 2213	59	C70096	. 2213	57
C46572	. 879P	109	C47251	. 1727	69	C50157	. 1730	96	C70024	. 2213	59	C70097	. 2213	57
C46573	. 879P	109	C47252	. 1727	69	C50168	. 1730	96	C70025	. 2213	59	C70098	. 2213	57
C46576	. 879P	109	C47253	. 1727	69	C50180	. 1730	96	C70026	. 2213	59	C70099	. 2213	57
C46578	. 879P	109	C47254	. 1727	69	C50194	. 1730	96	C70027	. 2213	59	C70100	. 2213	57
C46579	. 879P	109	C47255	. 1727	69	C50203	. 1730	96	C70028	. 2213	59	C70101	. 2213	58
C46580	. 879P	109	C47256	. 1727	69	C50214	. 1730	96	C70029	. 2213	59	C70102	. 2213	58
C46583	. 879P	109	C47257	. 1727	69	C50226	. 1730	96	C70030	. 2213	59	C70104	. 2213	58
C46584	. 879P	109	C47258	. 1727	69	C50368	. 4703	103	C70031	. 2213	59	C70106	. 2213	58
C46585	. 879P	109	C47259	. 1727	69	C50382	. 4703	103	C70032	. 2213	58	C70107	. 2213	58
C46586	. 879P	109	C47260	. 1727	69	C50391	. 4703	103	C70033	. 2213	58	C70108	. 2213	58
C46587	. 879P	109	C47261	. 1727	69	C50402	. 4703	103	C70034	. 2213	58	C70109	. 2213	58
C46592	. 879P	109	C47517	. 1727	67	C50414	. 4703	103	C70035	. 2213	58	C70110	. 2213	58
C46593	. 879P	109	C47519	. 1727	67	C50423	. 4703	103	C70036	. 2213	58	C70111	. 2213	58
C46594	. 879P	109	C47526	. 1727	67	C50428	. 4703	103	C70037	. 2213	58	C70112	. 2213	58
C46597	. 879P	109	C47548	. 1727	67	C50433	. 4703	103	C70038	. 2213	58	C70113	. 2213	58
C46598	. 879P	109	C47552	. 1727	67	C50438	. 4703	103	C70039	. 2213	58	C70114	. 2213	58
C46599	. 879P	109	C47561	. 1727	67	C50443	. 4703	103	C70040	. 2213	58	C70115	. 2213	58
C46600	. 879P	109	C47571	. 1727	68	C50449	. 4703	103	C70041	. 2213	58	C70116	. 2213	58
C46605	. 879P	109	C47574	. 1727	68	C50459	. 4703	103	C70042	. 2213	58	C70117	. 2213	58
C46612	. 879P	109	C47580	. 1727	68	C52772	. 1798	87	C70043	. 2213	58	C70118	. 2213	58
C46613	. 879P	109	C47582	. 1727	68	C52773	. 1798	87	C70044	. 2213	58	C70119	. 2213	58
C46614	. 879P	109	C47591	. 1727	68	C52774	. 1798	87	C70045	. 2213	58	C70120	. 2213	58
C46620	. 879P	109	C47602	. 1727	68	C52775	. 1798	87	C70046	. 2213	58	C70122	. 2213	58
C46621	. 879P	109	C47613	. 1727	68	C52776	. 1798	87	C70047	. 2213	58	C70124	. 2213	58
C46622	. 879P	109	C47618	. 1727	68	C52777	. 1798	87	C70048	. 2213	58	C70125	. 2213	59
C46629	. 879P	109	C47623	. 1727	68	C53651	. 192	138	C70049	. 2213	58	C70126	. 2213	59
C46630	. 879P	109	C47625	. 1727	68	C53652	. 192	138	C70050	. 2213	58	C70127	. 2213	59
C46639	. 879P	109	C47634	. 1727	68	C53653	. 192	138	C70051	. 2213	58	C70128	. 2213	59
C46645	. 879P	109	C47648	. 1727	68	C53654	. 192	138	C70052	. 2213	59	C70129	. 2213	59
C46647	. 879P	109	C47671	. 1727	69	C53655	. 192	138	C70053	. 2213	59	C70130	. 2213	59
C46657	. 879P	109	C47694	. 1727	69	C53656	. 192	138	C70054	. 2213	59	C70131	. 2213	59
C46658	. 879P	109	C47708	. 1727	69	C53657	. 192	138	C70055	. 2213	59	C70132	. 2213	59
C46659	. 879P	109	C47718	. 1727	69	C53658	. 192	138	C70056	. 2213	59	C70133	. 2213	59
C46669	. 879P	109	C48655	. 2727	64	C53659	. 192	138	C70057	. 2213	55	C70134	. 2213	58
C46673	. 879P	109	C48675	. 2727	64	C53660	. 192	138	C70058	. 2213	55	C70135	. 2213	58
C46674	. 879P	109	C48697	. 2727	64	C53661	. 192	138	C70059	. 2213	56	C70136	. 2213	58
C46678	. 879P	109	C48707	. 2727	64	C53662	. 192	138	C70060	. 2213	56	C70137	. 2213	57
C46679	. 879P	109	C48718	. 2727	64	C53665	. 105	95	C70061	. 2213	56	C70138	. 2213	57
C46687	. 879P	109	C48736	. 2727	64	C53666	. 105	95	C70062	. 2213	56	C70139	. 2213	57

Part Number Index



Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number
C70140	2213	57	C70208	2213	55	C70305	2330	26	C71011	2001	36	C71110	2001	37
C70141	2213	57	C70209	2213	55	C70306	2330	26	C71012	2001	37	C71111	2001	37
C70142	2213	57	C70210	2213	55	C70307	2330	26	C71013	2001	37	C71112	2001	37
C70143	2213	57	C70211	2213	55	C70308	2330	26	C71014	2001	37	C71113	2001	37
C70144	2213	57	C70212	2213	55	C70309	2330	26	C71015	2001	37	C71114	2001	37
C70145	2213	57	C70213	2213	55	C70310	2330	26	C71016	2001	37	C71115	2001	37
C70146	2213	57	C70220	2213	56	C70311	2330	26	C71017	2001	38	C71116	2001	37
C70147	2213	57	C70221	2213	56	C70312	2330	26	C71018	2001	38	C71117	2001	37
C70148	2213	57	C70222	2213	56	C70313	2330	26	C71019	2001	38	C71118	2001	36
C70149	2213	57	C70223	2213	57	C70314	2330	26	C71020	2001	38	C71119	2001	36
C70150	2213	57	C70224	2213	57	C70315	2330	26	C71021	2001	38	C71120	2001	36
C70151	2213	57	C70225	2213	58	C70316	2330	26	C71022	2001	38	C71121	2001	36
C70152	2213	57	C70226	2213	58	C70317	2330	26	C71023	2001	38	C71122	2001	36
C70153	2213	57	C70250	2330	25	C70318	2330	26	C71024	2001	38	C71123	2001	36
C70154	2213	57	C70251	2330	25	C70319	2330	26	C71025	2001	38	C71124	2001	36
C70155	2213	57	C70252	2330	25	C70320	2330	26	C71026	2001	38	C71125	2001	36
C70156	2213	57	C70253	2330	25	C70321	2330	26	C71027	2001	39	C71126	2001	36
C70157	2213	57	C70254	2330	25	C70322	2330	26	C71028	2001	39	C71127	2001	36
C70158	2213	57	C70255	2330	25	C70323	2330	26	C71029	2001	39	C71128	2001	36
C70159	2213	57	C70256	2330	25	C70324	2330	26	C71030	2001	39	C71129	2001	36
C70160	2213	57	C70257	2330	26	C70325	2330	26	C71031	2001	39	C71130	2001	36
C70161	2213	57	C70258	2330	26	C70326	2330	26	C71032	2001	39	C71131	2001	36
C70162	2213	56	C70259	2330	26	C70327	2330	26	C71033	2001	39	C71132	2001	36
C70163	2213	56	C70260	2330	26	C70328	2330	26	C71034	2001	39	C71133	2001	36
C70164	2213	56	C70261	2330	26	C70329	2330	26	C71035	2001	39	C71134	2001	36
C70165	2213	56	C70262	2330	26	C70330	2330	26	C71036	2001	39	C71135	2001	36
C70166	2213	56	C70263	2330	26	C70331	2330	26	C71037	2001	39	C71136	2001	36
C70167	2213	56	C70264	2330	26	C70332	2330	25	C71038	2001	39	C71137	2001	36
C70168	2213	56	C70265	2330	26	C70333	2330	25	C71039	2001	39	C71138	2001	36
C70169	2213	56	C70266	2330	26	C70334	2330	25	C71040	2001	39	C71139	2001	36
C70170	2213	56	C70267	2330	26	C70335	2330	25	C71041	2001	39	C71140	2001	36
C70171	2213	56	C70268	2330	26	C70336	2330	25	C71042	2001	39	C71141	2001	36
C70172	2213	56	C70269	2330	27	C70337	2330	25	C71043	2001	39	C71142	2001	36
C70173	2213	56	C70270	2330	27	C70338	2330	25	C71044	2001	39	C71143	2001	36
C70174	2213	56	C70271	2330	27	C70339	2330	25	C71071	2001	37	C71144	2001	35
C70175	2213	56	C70272	2330	27	C70340	2330	25	C71072	2001	37	C71145	2001	35
C70176	2213	56	C70273	2330	27	C70341	2330	25	C71073	2001	37	C71146	2001	35
C70177	2213	56	C70274	2330	27	C70342	2330	25	C71074	2001	37	C71147	2001	35
C70178	2213	56	C70275	2330	27	C70343	2330	25	C71076	2001	37	C71148	2001	35
C70179	2213	56	C70276	2330	27	C70344	2330	25	C71077	2001	38	C71149	2001	35
C70180	2213	56	C70277	2330	27	C70345	2330	25	C71078	2001	38	C71150	2001	35
C70181	2213	56	C70278	2330	27	C70346	2330	25	C71079	2001	38	C71151	2001	35
C70182	2213	56	C70279	2330	27	C70347	2330	25	C71080	2001	38	C71152	2001	35
C70183	2213	56	C70280	2330	26	C70348	2330	25	C71081	2001	38	C71153	2001	35
C70184	2213	56	C70281	2330	26	C70349	2330	25	C71082	2001	38	C71154	2001	35
C70185	2213	56	C70282	2330	26	C70350	2330	25	C71083	2001	38	C71155	2001	35
C70186	2213	56	C70283	2330	26	C70351	2330	25	C71084	2001	38	C71156	2001	35
C70187	2213	56	C70284	2330	26	C70352	2330	25	C71085	2001	38	C71157	2001	35
C70188	2213	56	C70285	2330	26	C70353	2330	25	C71086	2001	38	C71158	2001	35
C70189	2213	55	C70286	2330	26	C70354	2330	25	C71087	2001	38	C71159	2001	35
C70190	2213	55	C70287	2330	26	C70355	2330	25	C71088	2001	38	C71160	2001	35
C70191	2213	55	C70288	2330	26	C70356	2330	25	C71089	2001	38	C71200	2001	35
C70192	2213	55	C70289	2330	26	C70365	2213	59.113	C71090	2001	38	C71201	2001	35
C70193	2213	55	C70290	2330	26	C70366	2213	59.113	C71091	2001	38	C71202	2001	35
C70194	2213	55	C70291	2330	26	C70367	2213	59.113	C71092	2001	38	C71203	2001	35
C70195	2213	55	C70292	2330	26	C70368	2330	27.113	C71093	2001	38	C71204	2001	35
C70196	2213	55	C70293	2330	26	C70369	2330	27.113	C71094	2001	38	C71205	2001	35
C70197	2213	55	C70294	2330	26	C70370	2330	27.113	C71095	2001	38	C71206	2001	35
C70198	2213	55	C70295	2330	26	C70371	2222	54.113	C71096	2001	39	C71207	2001	35
C70199	2213	55	C70296	2330	26	C71000	2001	40.113	C71101	2001	37	C71208	2001	35
C70200	2213	55	C70297	2330	27	C71003	2001	35	C71102	2001	37	C71209	2001	35
C70201	2213	55	C70298	2330	27	C71004	2001	35	C71103	2001	37	C71210	2001	35
C70202	2213	55	C70299	2330	27	C71005	2001	35	C71104	2001	37	C71211	2001	35
C70203	2213	55	C70300	2330	27	C71006	2001	36	C71105	2001	37	C71212	2001	35
C70204	2213	55	C70301	2330	27	C71007	2001	36	C71106	2001	37	C71213	2001	35
C70205	2213	55	C70302	2330	27	C71008	2001	36	C71107	2001	37	C71214	2001	35
C70206	2213	55	C70303	2330	27	C71009	2001	36	C71108	2001	37	C71215	2001	35
C70207	2213	55	C70304	2330	27	C71010	2001	36	C71109	2001	37	C71216	2001	35



Part Number Index

Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number
C71217	2001	35	C71289	2001	38	C72077	2002	38	C72149	2002	35	C72270	2002	37
C71218	2001	35	C71290	2001	38	C72078	2002	38	C72150	2002	35	C72271	2002	38
C71219	2001	35	C71292	2001	38	C72079	2002	38	C72151	2002	35	C72272	2002	38
C71220	2001	35	C71293	2001	38	C72080	2002	38	C72152	2002	35	C72273	2002	38
C71221	2001	35	C71295	2001	38	C72081	2002	38	C72153	2002	35	C72274	2002	38
C71222	2001	35	C71297	2001	38	C72082	2002	38	C72154	2002	35	C72275	2002	38
C71223	2001	35	C71298	2001	38	C72083	2002	38	C72155	2002	35	C72276	2002	38
C71224	2001	35	C71299	2001	38	C72084	2002	38	C72156	2002	35	C72277	2002	38
C71225	2001	36	C71300	2001	38	C72085	2002	38	C72157	2002	35	C72278	2002	38
C71226	2001	36	C71301	2001	38	C72086	2002	38	C72158	2002	35	C72279	2002	38
C71227	2001	36	C71302	2001	38	C72087	2002	38	C72159	2002	35	C72280	2002	38
C71228	2001	36	C71303	2001	38	C72088	2002	38	C72160	2002	35	C72282	2002	38
C71229	2001	36	C71305	2001	38	C72089	2002	38	C72197	2001	40.113	C72283	2002	38
C71230	2001	36	C71306	2001	38	C72090	2002	38	C72198	2002	40.113	C72284	2002	38
C71231	2001	36	C71308	2001	39	C72091	2002	38	C72199	2002	40.113	C72285	2002	38
C71232	2001	36	C71309	2001	39	C72092	2002	38	C72200	2002	35	C72286	2002	38
C71233	2001	36	C71310	2001	39	C72093	2002	38	C72202	2002	35	C72287	2002	38
C71234	2001	36	C71311	2001	39	C72094	2002	38	C72204	2002	35	C72289	2002	38
C71235	2001	36	C71312	2001	39	C72095	2002	38	C72206	2002	35	C72290	2002	38
C71236	2001	36	C71314	2001	39	C72096	2002	39	C72208	2002	35	C72292	2002	38
C71237	2001	36	C71315	2001	39	C72101	2002	37	C72210	2002	35	C72293	2002	38
C71238	2001	36	C71316	2001	39	C72102	2002	37	C72212	2002	35	C72295	2002	38
C71239	2001	36	C71319	2001	39	C72103	2002	37	C72214	2002	35	C72297	2002	38
C71240	2001	36	C71321	2001	39	C72104	2002	37	C72216	2002	35	C72298	2002	38
C71241	2001	36	C71323	2001	39	C72105	2002	37	C72218	2002	35	C72299	2002	38
C71242	2001	36	C71325	2001	39	C72106	2002	37	C72220	2002	35	C72300	2002	38
C71243	2001	36	C71327	2001	39	C72107	2002	37	C72222	2002	35	C72301	2002	38
C71244	2001	36	C71329	2001	39	C72108	2002	37	C72224	2002	35	C72302	2002	38
C71245	2001	36	C71331	2001	39	C72109	2002	37	C72226	2002	36	C72303	2002	38
C71246	2001	36	C71333	2001	39	C72110	2002	37	C72228	2002	36	C72305	2002	38
C71247	2001	36	C71335	2001	39	C72111	2002	37	C72230	2002	36	C72306	2002	38
C71248	2001	36	C71337	2001	39	C72112	2002	37	C72231	2002	36	C72308	2002	39
C71249	2001	37	C72000	2002	40.113	C72113	2002	37	C72232	2002	36	C72309	2002	39
C71250	2001	37	C72003	2002	35	C72114	2002	37	C72233	2002	36	C72310	2002	39
C71251	2001	37	C72004	2002	35	C72115	2002	37	C72234	2002	36	C72311	2002	39
C71252	2001	37	C72005	2002	35	C72116	2002	37	C72235	2002	36	C72312	2002	39
C71253	2001	37	C72006	2002	36	C72117	2002	37	C72236	2002	36	C72314	2002	39
C71254	2001	37	C72007	2002	36	C72118	2002	36	C72237	2002	36	C72315	2002	39
C71255	2001	37	C72008	2002	36	C72119	2002	36	C72238	2002	36	C72316	2002	39
C71256	2001	37	C72009	2002	36	C72120	2002	36	C72239	2002	36	C72319	2002	39
C71257	2001	37	C72010	2002	36	C72121	2002	36	C72240	2002	36	C72321	2002	39
C71259	2001	37	C72011	2002	36	C72122	2002	36	C72241	2002	36	C72323	2002	39
C71260	2001	37	C72012	2002	37	C72123	2002	36	C72242	2002	36	C72325	2002	39
C71261	2001	37	C72013	2002	37	C72124	2002	36	C72243	2002	36	C72327	2002	39
C71262	2001	37	C72014	2002	37	C72125	2002	36	C72244	2002	36	C72329	2002	39
C71264	2001	37	C72015	2002	37	C72126	2002	36	C72245	2002	36	C72331	2002	39
C71265	2001	37	C72016	2002	37	C72127	2002	36	C72246	2002	36	C72333	2002	39
C71266	2001	37	C72017	2002	38	C72128	2002	36	C72247	2002	36	C72335	2002	39
C71267	2001	37	C72018	2002	38	C72129	2002	36	C72248	2002	36	C72337	2002	39
C71268	2001	37	C72019	2002	38	C72130	2002	36	C72249	2002	37	C73003	2002-TC	35
C71269	2001	37	C72020	2002	38	C72131	2002	36	C72250	2002	37	C73004	2002-TC	35
C71270	2001	37	C72021	2002	38	C72132	2002	36	C72251	2002	37	C73005	2002-TC	35
C71271	2001	38	C72022	2002	38	C72133	2002	36	C72252	2002	37	C73006	2002-TC	36
C71272	2001	38	C72023	2002	38	C72134	2002	36	C72253	2002	37	C73007	2002-TC	36
C71273	2001	38	C72024	2002	38	C72135	2002	36	C72254	2002	37	C73008	2002-TC	36
C71274	2001	38	C72025	2002	38	C72136	2002	36	C72255	2002	37	C73009	2002-TC	36
C71275	2001	38	C72026	2002	38	C72137	2002	36	C72256	2002	37	C73010	2002-TC	36
C71276	2001	38	C72027	2002	39	C72138	2002	36	C72257	2002	37	C73011	2002-TC	36
C71277	2001	38	C72028	2002	39	C72139	2002	36	C72259	2002	37	C73012	2002-TC	37
C71278	2001	38	C72029	2002	39	C72140	2002	36	C72260	2002	37	C73013	2002-TC	37
C71279	2001	38	C72030	2002	39	C72141	2002	36	C72261	2002	37	C73014	2002-TC	37
C71280	2001	38	C72031	2002	39	C72142	2002	36	C72262	2002	37	C73015	2002-TC	37
C71282	2001	38	C72032	2002	39	C72143	2002	36	C72264	2002	37	C73016	2002-TC	37
C71283	2001	38	C72071	2002	37	C72144	2002	35	C72265	2002	37	C73017	2002-TC	38
C71284	2001	38	C72072	2002	37	C72145	2002	35	C72266	2002	37	C73018	2002-TC	38
C71285	2001	38	C72073	2002	37	C72146	2002	35	C72267	2002	37	C73019	2002-TC	38
C71286	2001	38	C72074	2002	37	C72147	2002	35	C72268	2002	37	C73020	2002-TC	38
C71287	2001	38	C72076	2002	37	C72148	2002	35	C72269	2002	37	C73021	2002-TC	38

INDEX**Part Number Index**

Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number
C73022	2002-TC	38	C73133	2002-TC	36	C73405	2228	50	C73473	2228	50	C89443	1766	65
C73023	2002-TC	38	C73134	2002-TC	36	C73406	2228	50	C73474	2228	50	C89444	1766	65
C73024	2002-TC	38	C73135	2002-TC	36	C73407	2228	51	C73475	2228	50	C89445	1766	65
C73025	2002-TC	38	C73136	2002-TC	36	C73408	2228	51	C73476	2228	50	C89446	1766	65
C73026	2002-TC	38	C73137	2002-TC	36	C73409	2228	51	C73477	2228	50	C89447	1766	65
C73027	2002-TC	39	C73138	2002-TC	36	C73410	2228	51	C73478	2228	50	C89448	1766	65
C73028	2002-TC	39	C73139	2002-TC	36	C73411	2228	51	C73479	2228	50	C89449	1766	65
C73029	2002-TC	39	C73140	2002-TC	36	C73412	2228	51	C73480	2228	50	C89450	1766	66
C73030	2002-TC	39	C73141	2002-TC	36	C73413	2228	51	C83000	2513	74	C89451	1766	66
C73031	2002-TC	39	C73142	2002-TC	36	C73414	2228	51	C83001	2513	74	C89452	1766	66
C73032	2002-TC	39	C73143	2002-TC	36	C73415	2228	51	C83002	2513	74	C89453	1766	66
C73071	2002-TC	37	C73144	2002-TC	35	C73416	2228	51	C83003	2513	74	C89454	1766	66
C73072	2002-TC	37	C73145	2002-TC	35	C73417	2228	51	C83004	2513	74	C89455	1766	66
C73073	2002-TC	37	C73146	2002-TC	35	C73418	2228	51	C83005	2513	74	C89456	1766	66
C73074	2002-TC	37	C73147	2002-TC	35	C73419	2228	51	C83006	2513	74	C89457	1766	66
C73075	2002-TC	37	C73148	2002-TC	35	C73420	2228	51	C83007	2513	74	C89458	1766	66
C73076	2002-TC	38	C73149	2002-TC	35	C73421	2228	51	C83008	2513	74	C89459	1766	66
C73077	2002-TC	38	C73150	2002-TC	35	C73422	2228	51	C83009	2513	74	C89460	1766	66
C73078	2002-TC	38	C73151	2002-TC	35	C73423	2228	51	C83010	2513	75	C89461	1766	66
C73079	2002-TC	38	C73152	2002-TC	35	C73424	2228	51	C83011	2513	74	C89462	1766	66
C73080	2002-TC	38	C73200	2002-TC	35	C73425	2228	51	C83012	2513	74	C89463	1766	66
C73081	2002-TC	38	C73210	2002-TC	35	C73426	2228	51	C83013	2513	74	C89464	1766	66
C73082	2002-TC	38	C73212	2002-TC	35	C73427	2228	51	C83014	2513	74	C89465	1766	66
C73083	2002-TC	38	C73220	2002-TC	35	C73428	2228	51	C83015	2513	74	C89466	1766	66
C73084	2002-TC	38	C73228	2002-TC	36	C73429	2228	51	C83016	2513	74	C89467	1766	66
C73085	2002-TC	38	C73230	2002-TC	36	C73430	2228	51	C83017	2513	74	C89468	1766	66
C73086	2002-TC	38	C73235	2002-TC	36	C73431	2228	51	C83018	2513	74	C89469	1766	66
C73087	2002-TC	38	C73237	2002-TC	36	C73432	2228	51	C83019	2513	74	C89470	1766	66
C73088	2002-TC	38	C73238	2002-TC	36	C73433	2228	51	C83020	2513	74	C89471	1766	66
C73089	2002-TC	38	C73240	2002-TC	36	C73434	2228	51	C83021	2513	74	C89472	1766	66
C73090	2002-TC	38	C73241	2002-TC	36	C73435	2228	51	C83022	2513	74	C89473	1766	66
C73091	2002-TC	38	C73245	2002-TC	36	C73436	2228	51	C83023	2513	74	C89474	1766	66
C73092	2002-TC	38	C73246	2002-TC	36	C73437	2228	51	C83024	2513	74	C89475	1766	66
C73093	2002-TC	38	C73247	2002-TC	36	C73438	2228	51	C83025	2513	74	C89476	1766	66
C73094	2002-TC	38	C73248	2002-TC	36	C73439	2228	51	C83026	2513	74	C89477	1766	66
C73095	2002-TC	39	C73250	2002-TC	37	C73440	2228	51	C89410	1766	65	C89478	1766	66
C73101	2002-TC	37	C73253	2002-TC	37	C73441	2228	51	C89411	1766	65	C89479	1766	66
C73102	2002-TC	37	C73254	2002-TC	37	C73442	2228	51	C89412	1766	65	C89480	1766	66
C73103	2002-TC	37	C73255	2002-TC	37	C73443	2228	51	C89413	1766	65	C89481	1766	66
C73104	2002-TC	37	C73256	2002-TC	37	C73444	2228	51	C89414	1766	65	C89482	1766	66
C73105	2002-TC	37	C73257	2002-TC	37	C73445	2228	51	C89415	1766	65	C89483	1766	66
C73106	2002-TC	37	C73260	2002-TC	37	C73446	2228	51	C89416	1766	65	C89484	1766	66
C73107	2002-TC	37	C73265	2002-TC	37	C73447	2228	51	C89417	1766	65	C89485	1766	66
C73108	2002-TC	37	C73270	2002-TC	37	C73448	2228	51	C89418	1766	65	C89486	1766	66
C73109	2002-TC	37	C73273	2002-TC	38	C73449	2228	51	C89419	1766	65	C89487	1766	66
C73110	2002-TC	37	C73275	2002-TC	38	C73450	2228	51	C89420	1766	65	C89488	1766	66
C73111	2002-TC	37	C73280	2002-TC	38	C73451	2228	50	C89421	1766	65	C89489	1766	66
C73112	2002-TC	37	C73285	2002-TC	38	C73452	2228	50	C89422	1766	65	C89490	1766	66
C73113	2002-TC	37	C73290	2002-TC	38	C73453	2228	50	C89423	1766	65	C89491	1766	66
C73114	2002-TC	37	C73295	2002-TC	38	C73454	2228	50	C89424	1766	65	C89492	1766	66
C73115	2002-TC	37	C73300	2002-TC	38	C73455	2228	50	C89425	1766	65	C89493	1766	66
C73116	2002-TC	37	C73305	2002-TC	38	C73456	2228	50	C89426	1766	65	C89494	1766	66
C73117	2002-TC	37	C73306	2002-TC	38	C73457	2228	50	C89427	1766	65	C89495	1766	66
C73118	2002-TC	36	C73308	2002-TC	39	C73458	2228	50	C89428	1766	65	C89496	1766	66
C73119	2002-TC	36	C73310	2002-TC	39	C73459	2228	50	C89429	1766	65	C89497	1766	66
C73120	2002-TC	36	C73312	2002-TC	39	C73460	2228	50	C89430	1766	65	C89498	1766	66
C73121	2002-TC	36	C73314	2002-TC	39	C73461	2228	50	C89431	1766	65	C89499	1766	66
C73122	2002-TC	36	C73316	2002-TC	39	C73462	2228	50	C89432	1766	65	C89500	1766	66
C73123	2002-TC	36	C73319	2002-TC	39	C73463	2228	50	C89433	1766	65	C89501	1727	67
C73124	2002-TC	36	C73323	2002-TC	39	C73464	2228	50	C89434	1766	65	C89502	1727	67
C73125	2002-TC	36	C73327	2002-TC	39	C73465	2228	50	C89435	1766	65	C89503	1727	67
C73126	2002-TC	36	C73331	2002-TC	39	C73466	2228	50	C89436	1766	65	C89504	1727	67
C73127	2002-TC	36	C73335	2002-TC	39	C73467	2228	50	C89437	1766	65	C89505	1727	67
C73128	2002-TC	36	C73400	2228	50	C73468	2228	50	C89438	1766	65	C89506	1727	67
C73129	2002-TC	36	C73401	2228	50	C73469	2228	50	C89439	1766	65	C89507	1727	67
C73130	2002-TC	36	C73402	2228	50	C73470	2228	50	C89440	1766	65	C89508	1727	67
C73131	2002-TC	36	C73403	2228	50	C73471	2228	50	C89441	1766	65	C89509	1727	67
C73132	2002-TC	36	C73404	2228	50	C73472	2228	50	C89442	1766	65	C89512	1727	67



Part Number Index

Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number
C89513	1727	67	C89598	1727	69	C91712	183	111						
C89515	1727	67	C89599	1727	69	C91713	183	111						
C89516	1727	67	C89600	1727	69	C91714	183	111						
C89517	1727	67	C89601	1727	69	C91715	183	111						
C89518	1727	67	C89603	1727	69	C91717	183	111						
C89519	1727	67	C89604	1727	69	C91719	183	111						
C89520	1727	67	C89605	1727	69	C91720	183	111						
C89521	1727	67	C89606	1727	69	C91721	183	111						
C89522	1727	67	C89607	1727	69	C91722	183	111						
C89523	1727	67	C89608	1727	69	C91723	183	111						
C89525	1727	67	C89609	1727	69	C91724	183	111						
C89527	1727	67	C89610	1727	69	C91726	183	111						
C89528	1727	67	C89612	1727	69	C91728	183	111						
C89529	1727	67	C89613	1727	69	C91729	183	111						
C89530	1727	67	C89614	1727	69	C91734	183	111						
C89532	1727	67	C89615	1727	69	C91735	183	111						
C89533	1727	67	C89676	1767	33	C91737	183	111						
C89534	1727	67	C89677	1767	33	C91749	183	111						
C89535	1727	68	C89678	1767	33	C91750	183	114						
C89536	1727	68	C89679	1767	33	C91770	183	114						
C89539	1727	68	C89680	1767	33	C91830	183	111						
C89540	1727	68	C89681	1767	33	C91832	183	111						
C89543	1727	68	C89682	1767	33	C91833	183	111						
C89544	1727	68	C89683	1767	33	C91834	183	111						
C89545	1727	68	C89684	1767	33	C91835	183	111						
C89546	1727	68	C89685	1767	33	C92704	183	111						
C89548	1727	68	C89686	1767	33	C92705	183	111						
C89549	1727	68	C89687	1767	33	C92706	183	111						
C89550	1727	68	C89688	1767	33	C92707	183	111						
C89551	1727	68	C89689	1767	33	C92708	183	111						
C89552	1727	68	C89690	1767	33	C92836	183	111						
C89554	1727	68	C89691	1767	33	C94560	3001	89						
C89555	1727	68	C89692	1767	33	C94561	3001	89						
C89556	1727	68	C89693	1767	33	C94562	3001	89						
C89557	1727	68	C89694	1767	33	C94563	3001	89						
C89558	1727	68	C89695	1767	33	C94564	3001	89						
C89560	1727	68	C89696	1767	33	C94565	3001	89						
C89561	1727	68	C89697	1767	33	C94566	3001	89						
C89563	1727	68	C89698	1767	33	C94567	3001	89						
C89564	1727	68	C89699	1767	33	C94568	3001	89						
C89566	1727	68	C89700	1767	33	C94569	3001	89						
C89568	1727	68	C89701	1767	33	C94570	3001	89						
C89569	1727	68	C89702	1767	33	C94571	3001	89						
C89570	1727	68	C89703	1767	33	C94572	3001	89						
C89572	1727	68	C89704	1767	33	C94573	3001	89						
C89573	1727	68	C89705	1765	32	C94574	3001	89						
C89574	1727	68	C89706	1765	32	C94575	3001	89						
C89575	1727	68	C89707	1765	32	C94576	3001	89						
C89576	1727	68	C89708	1765	32	C94577	3001	89						
C89577	1727	68	C89709	1765	32	C94578	3001	89						
C89578	1727	68	C89710	1765	32	C94579	3001	89						
C89580	1727	69	C89711	1765	32	C94580	3001	89						
C89581	1727	69	C89712	1765	32	C94581	3001	89						
C89582	1727	69	C89713	1765	32	C94582	3001	89						
C89583	1727	69	C89714	1765	32	C94583	3001	89						
C89584	1727	69	C89715	1765	32	C94584	3001	89						
C89585	1727	69	C89716	1765	32	C94585	3001	89						
C89586	1727	69	C91695	183	111	C94586	3001	89						
C89587	1727	69	C91696	183	111	C94587	3001	89						
C89588	1727	69	C91697	183	111	C94588	3001	89.114						
C89589	1727	69	C91698	183	111	C94589	3001	89.114						
C89590	1727	69	C91699	183	111	C94590	3001	89.114						
C89591	1727	69	C91700	183	111	C94591	3001	89.114						
C89593	1727	69	C91701	183	111	C94592	3001	89.114						
C89594	1727	69	C91703	183	111	C94593	3001	89.114						
C89595	1727	69	C91709	183	111	C94594	3001	89.114						
C89596	1727	69	C91710	183	111	C94595	3001	89.114						
C89597	1727	69	C91711	183	111									

INDEX**Tap & Drill Recommendations***Machine Screw, Fractional, and Metric Sizes*

Tap Size & Pitch		Cutting Taps		Forming Taps		Tap Size & Pitch		Cutting Taps		Forming Taps	
inch	metric	drill size	decimal inch	drill size	decimal inch	inch	metric	drill size	decimal inch	drill size	decimal inch
0-80		3/64	.0469	54	.0550		M12 x 1,75	10,2	.4016	11,2	.4409
	M1,6 x 0,35	1,25	.0492	1,45	.0571		M12 x 1,25	10,8	.4252	11,5	.4528
	M1,8 x 0,35	1,45	.0571	1,65	.0650	1/2-13		27/64	.4219	15/32	.4688
1-64		53	.0595	51	.0670	1/2-20		29/64	.4531	12,25	.4823
1-72		53	.0595	51	.0670		M14 x 2	12,0	.4724	33/64	.5156
	M2 x 0,4	1,6	.0630	1,8	.0709	9/16-12		31/64	.4844	17/32	.5312
2-56		50	.0700	5/64	.0781	9/16-18		33/64	.5156	13,5	.5315
2-64		50	.0700	47	.0785	5/8-11		17/32	.5312	14,75	.5807
	M2,2 x 0,45	1,75	.0689	2,0	.0787	5/8-18		37/64	.5781	15,25	.6004
	M2,5 x 0,45	2,05	.0807	2,3	.0906		M16 x 2	14,0	.5512	19/32	.5938
3-48		47	.0785	43	.0890		M16 x 1,5	14,5	.5709	15,25	.6004
3-56		46	.0810	2,3	.0906		M18 x 2,5	15,5	.6102	39/64	.6094
4-40		43	.0890	38	.1015		M18 x 1,5	16,5	.6496	17,25	.6791
4-48		42	.0935	2,6	.1024	3/4-10		21/32	.6562	45/64	.7031
	M3 x 0,5	2,5	.0984	7/64	.1094	3/4-16		11/16	.6875	23/32	.7188
5-40		38	.1015	33	.1130		M20 x 2,5	17,5	.6890		
5-44		37	.1040	2,9	.1142		M20 x 1,5	18,5	.7283		
	M3,5 x 0,6	2,9	.1142	3,2	.1260		M22 x 2,5	19,5	.7677		
6-32		36	.1065	1/8	.1250		M22 x 1,5	20,5	.8071		
6-40		33	.1130	3,25	.1280	7/8-9		49/64	.7656		
	M4 x 0,7	3,3	.1299	3,7	.1457	7/8-14		13/16	.8125		
8-32		29	.1360	25	.1495		M24 x 3	21,0	.8268		
8-36		29	.1360	24	.1520		M24 x 2	22,0	.8661		
	M4,5 x 0,75	3,7	.1457	4,1	.1614	1-8		7/8	.8750		
10-24		26	.1470	11/64	.1719	1-12		59/64	.9219		
10-32		21	.1590	16	.1770		M27 x 3	24,0	.9449		
	M5 x 0,8	4,2	.1654	14	.1820		M27 x 2	25,0	.9843		
12-24		16	.1770	8	.1990	1-1/8-7		63/64	.9844		
12-28		15	.1800	7	.2010	1-1/8-12		1-3/64	1.0469		
	M6 x 1	5,0	.1969	7/32	.2188		M30 x 3,5	26,5	1.0433		
1/4-20		7	.2010	1	.2280		M30 x 2	28,0	1.1024		
1/4-28		3	.2130	15/64	.2340	1-1/4-7		1-7/64	1.1094		
	M7 x 1	6,0	.2362	F	.2570	1-1/4-12		1-11/64	1.1719		
5/16-18		F	.2570	L	.2900		M33 x 3,5	29,5	1.1614		
5/16-24		I	.2720	M	.2950		M33 x 2	31,0	1.2205		
	M8 x 1,25	6,7	.2638	7,4	.2913	1-3/8-6		1-7/32	1.2188		
	M8 x 1	7,0	.2756	19/64	.2969	1-3/8-12		1-19/64	1.2969		
3/8-16		5/16	.3125	S	.3480		M36 x 4	32,0	1.2598		
3/8-24		Q	.3320	T	.3580		M36 x 3	33,0	1.2992		
	M10 x 1,5	8,5	.3346	U	.3680	1-1/2-6		1-11/32	1.3438		
	M10 x 1,25	8,7	.3425	9,4	.3701	1-1/2-12		1-27/64	1.4219		
7/16-14		U	.3680	Y	.4040		M39 x 4	35,0	1.3780		
7/16-20		25/64	.3906	Z	.4130		M39 x 3	36,0	1.4173		

**FORM
TAPS
NOT
AVAILABLE
IN
THESE
SIZES**

Pipe Taps — NPT, NPTF, NPSM, NPSC, NPSF Sizes

Nominal Tap Size & Pitch	NPT & NPTF		NPSM	NPSC	NPSF
	w/o reamer	w/ reamer			
1/16 – 27	C (.242)	A (.234)	—	1/4	D (.246)
1/8 – 27	Q (.332)	21/64	T (.358)	Q	R (.339)
1/4 – 18	7/16	27/64	15/32	7/16	7/16
3/8 – 18	9/16	9/16	.603*	37/64	37/64
1/2 – 14	45/64	11/16	19,0mm	23/32	.705*
3/4 – 14	29/32	57/64	61/64	59/64	59/64
1 – 1 1/2	1 9/64	1 1/8	1 13/64	1 5/32	1 5/32
1 1/4 – 1 1/2	1 31/64	1 15/32	1.546*	1 1/2	—
1 1/2 – 1 1/2	1 23/32	1 45/64	1 25/32	1 47/64	—
2 – 1 1/2	2 3/16	2 11/64	2 1/4	2 1/4	—

*special



Decimal Equivalents


DRILL SIZE	DECIMAL INCHES	DRILL SIZE	DECIMAL INCHES	DRILL SIZE	DECIMAL INCHES	DRILL SIZE	DECIMAL INCHES	DRILL SIZE	DECIMAL INCHES	DRILL SIZE	DECIMAL INCHES
0.30mm	.0118	1.40mm	.0551	3.20mm	.1260	7/32	.2188	8.60mm	.3386	37/64	.5781
0.32mm	.0126	1.45mm	.0571	30	.1285	5.60mm	.2205	R	.3390	14.75mm	.5807
80	.0135	1.50mm	.0591	3.30mm	.1299	2	.2210	8.70mm	.3425	15.00mm	.5906
0.35mm	.0138	53	.0595	3.40mm	.1339	5.70mm	.2244	11/32	.3438	19/32	.5938
79	.0145	1.55mm	.0610	29	.1360	1	.2280	8.80mm	.3465	15.25mm	.6004
0.38mm	.0150	1/16	.0625	3.50mm	.1378	5.80mm	.2283	S	.3480	39/64	.6094
1/64	.0156	1.60mm	.0630	28	.1405	5.90mm	.2323	8.90mm	.3504	15.50mm	.6102
0.40mm	.0157	52	.0635	9/64	.1406	A	.2340	9.00mm	.3543	15.75mm	.6201
78	.0160	1.65mm	.0650	3.60mm	.1417	15/64	.2344	T	.3580	5/8	.6250
0.42mm	.0165	1.70mm	.0669	27	.1440	6.00mm	.2362	9.10mm	.3583	16.00mm	.6299
0.45mm	.0177	51	.0670	3.70mm	.1457	B	.2380	23/64	.3594	16.25mm	.6398
77	.0180	1.75mm	.0689	26	.1470	6.10mm	.2402	9.20mm	.3622	41/64	.6406
0.48mm	.0189	50	.0700	25	.1495	C	.2420	9.30mm	.3661	16.50mm	.6496
0.50mm	.0197	1.80mm	.0709	3.80mm	.1496	6.20mm	.2441	U	.3680	21/32	.6562
76	.0200	1.85mm	.0728	24	.1520	D	.2460	9.40mm	.3701	16.75mm	.6594
75	.0210	49	.0730	3.90mm	.1535	6.30mm	.2480	9.50mm	.3740	17.00mm	.6693
0.55mm	.0217	1.90mm	.0748	23	.1540	1/4	.2500	3/8	.3750	43/64	.6719
74	.0225	48	.0760	5/32	.1562	E	.2500	V	.3770	17.25mm	.6791
0.60mm	.0236	1.95mm	.0768	22	.1570	6.40mm	.2520	9.60mm	.3780	11/16	.6875
73	.0240	5/64	.0781	4.00mm	.1575	6.50mm	.2559	9.70mm	.3819	17.50mm	.6890
0.62mm	.0244	47	.0785	21	.1590	F	.2570	9.80mm	.3858	45/64	.7031
72	.0250	2.00mm	.0787	20	.1610	6.60mm	.2598	W	.3860	18.00mm	.7087
0.65mm	.0256	2.05mm	.0807	4.10mm	.1614	G	.2610	9.90mm	.3898	23/32	.7188
71	.0260	46	.0810	4.20mm	.1654	6.70mm	.2638	25/64	.3906	18.50mm	.7283
0.70mm	.0276	45	.0820	19	.1660	17/64	.2656	1.00mm	.3937	47/64	.7344
70	.0280	2.10mm	.0827	4.30mm	.1693	H	.2660	X	.3970	19.00mm	.7480
69	.0292	2.15mm	.0846	18	.1695	6.80mm	.2677	1.20mm	.4016	3/4	.7500
0.75mm	.0295	44	.0860	11/64	.1719	6.90mm	.2717	Y	.4040	49/64	.7656
68	.0310	2.20mm	.0866	17	.1730	I	.2720	13/32	.4062	19.50mm	.7677
1/32	.0312	2.25mm	.0886	4.40mm	.1732	7.00mm	.2756	Z	.4130	25/32	.7812
0.80mm	.0315	43	.0890	16	.1770	J	.2770	10.50mm	.4134	20.00mm	.7874
67	.0320	2.30mm	.0906	4.50mm	.1772	7.10mm	.2795	27/64	.4219	51/64	.7969
66	.0330	2.35mm	.0925	15	.1800	K	.2810	10.80mm	.4252	20.50mm	.8071
0.85mm	.0335	42	.0935	4.60mm	.1811	9/32	.2812	11.00mm	.4331	13/16	.8125
65	.0350	3/32	.0938	14	.1820	7.20mm	.2835	7/16	.4375	21.00mm	.8268
0.90mm	.0354	2.40mm	.0945	4.70mm	.1850	7.30mm	.2874	11.20mm	.4409	53/64	.8281
64	.0360	41	.0960	13	.1850	L	.2900	11.50mm	.4528	27/32	.8438
63	.0370	2.45mm	.0965	3/16	.1875	7.40mm	.2913	29/64	.4531	21.50mm	.8465
0.95mm	.0374	40	.0980	12	.1890	M	.2950	11.80mm	.4646	55/64	.8594
62	.0380	2.50mm	.0984	4.8mm	.1890	7.50mm	.2953	15/32	.4688	22.00mm	.8661
61	.0390	39	.0995	11	.1910	19/64	.2969	12.00mm	.4724	7/8	.8750
1.00mm	.0394	38	.1015	4.90mm	.1929	7.60mm	.2992	12.20mm	.4803	22.50mm	.8858
60	.0400	2.60mm	.1024	10	.1935	N	.3020	31/64	.4844	57/64	.8906
59	.0410	37	.1040	9	.1960	7.70mm	.3031	12.50mm	.4921	23.00mm	.9055
1.05mm	.0413	2.70mm	.1063	5.00mm	.1969	7.80mm	.3071	1/2	.5000	29/32	.9062
58	.0420	36	.1065	8	.1990	7.90mm	.3110	12.80mm	.5039	59/64	.9219
57	.0430	7/64	.1094	5.10mm	.2008	5/16	.3125	13.00mm	.5118	23.50mm	.9252
1.10mm	.0433	35	.1100	7	.2010	8.00mm	.3150	33/64	.5156	15/16	.9375
1.15mm	.0453	2.80mm	.1102	13/64	.2031	O	.3160	13.20mm	.5197	24.00mm	.9449
56	.0465	34	.1110	6	.2040	8.10mm	.3189	17/32	.5312	61/64	.9531
3/64	.0469	33	.1130	5.20mm	.2047	8.20mm	.3228	13.50mm	.5315	24.50mm	.9646
1.20mm	.0472	2.90mm	.1142	5	.2055	P	.3230	13.80mm	.5433	31/32	.9688
1.25mm	.0492	32	.1160	5.30mm	.2087	8.30mm	.3268	35/64	.5469	25.00mm	.9843
1.30mm	.0512	3.00mm	.1181	4	.2090	21/64	.3281	14.00mm	.5512	63/64	.9844
55	.0520	31	.1200	5.40mm	.2126	8.40mm	.3307	14.25mm	.5610	1	1.0000
1.35mm	.0531	3.10mm	.1220	3	.2130	Q	.3320	9/16	.5625		
54	.0550	1/8	.1250	5.50mm	.2165	8.50mm	.3346	14.50mm	.5709		

FRACTIONAL - RED

WIRE GAGE - PURPLE

LETTER - BLUE

METRIC - GREEN



2501 Davis Creek Road, Seneca, SC 29678 U.S.A.

USA

website www.gfii.com

telephone 800.348.2885

fax 800.892.4290

email standard.distributors@gfii.com

International

telephone 864.653.3904

email international.distributors@gfii.com

Canada

website www.gfii.ca

800.348.2885

800.387.6649

email canada.distributors@gfii.com

Follow us on



AD

Together, we win.



ISA
INDUSTRIAL SUPPLY ASSOCIATION



DRILL_CTDCAT25